


ATN

Built for Rental

INTERNATIONAL PRESENCE

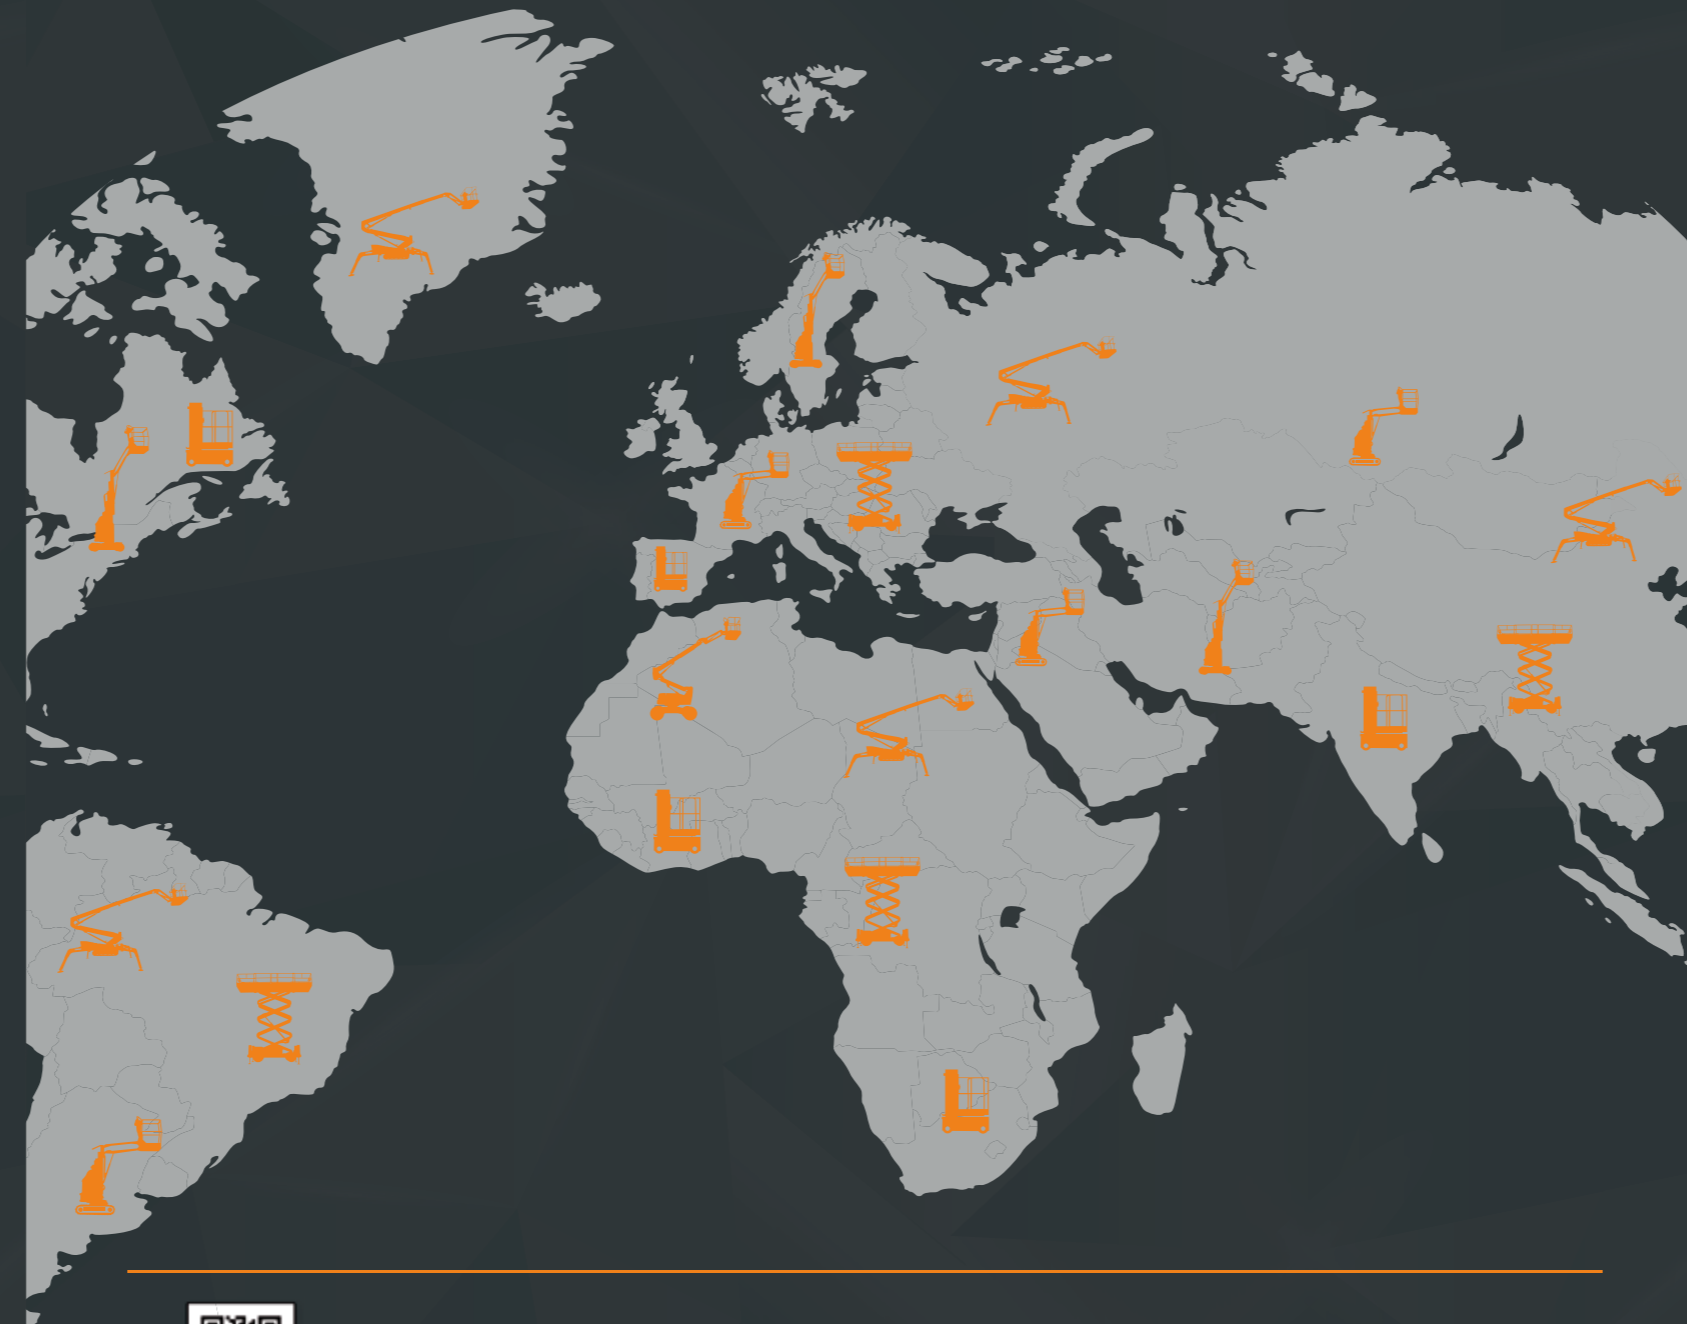

Direct link - Flash-me !

www.atnplatforms.com

ATN

Rue André Thevet,
Z.I. Guillaume Mon Amy
Lieu dit Bacqué
47400 Fauillet - FRANCE

contact@atnplatforms.com

Tél : +33 (0)5 53 79 83 20

This product complies with applicable European regulations (EN 280).
Due to our constant improvement policy, ATN reserves the right to make any modification without prior notice.
Non-contractual document.



Crédit Alpha Communication - 05 53 47 63 12

⚡ MAST BOOMS COMPACT & ON TRACKS



	PIAF 660RC	PIAF 660RC PICKING	PIAF 810	PIAF 1010
Working height	6,60 m	6,60 m	8,10 m	10,05 m
Platform height	4,60 m	4,60 m	6,10 m	8,05 m
Horizontal reach	0,36 m	/	3,00 m	3,35 m
Lift capacity	200 kg	120 kg +Tablette 80 kg	200 Kg	200 kg
Turntable rotation	/	/	2 x 110°	2 x 110°
Platform dimension	0,77 x 0,96 m	0,77 x 0,96 m	0,90 x 0,80 m	0,90 x 0,80 m
Platform dim. with extension	0,77 x 1,33 m	/	/	/
L x w x h stowed	1,46 x 0,78 x 1,96 m	1,64 x 0,78 x 1,96 m	2,47 x 1,20 x 1,98 m	2,70 x 1,20 x 2,12 m
Gradeability	25%	25%	30%	30%
Maximum tilt value	2°	2°	5°	3°
Weight	980 kg	980 kg	2200 kg	2780 kg
Ground pressure	471 KN/m2	471 KN/m2	49 KN/ m2	69 KN/ m2

⚡ MAST BOOMS ON WHEELS



	PIAF 880R	PIAF 1000R	PIAF 1100R	PIAF 12E
Working height	8,80 m	10,04 m	10,98 m	11,83 m
Platform height	6,80 m	8,04 m	8,98 m	9,83 m
Horizontal reach	3,36 m	3,46 m	3,74 m	5,10 m
Lift capacity	200 kg	200 kg	200 kg	200 kg
Turntable rotation	2 x 110°	2 x 110°	2 x 110°	352°
Platform dimension	0,90 x 0,80 m	0,90 x 0,80 m	0,90 x 0,80 m	1,10 x 0,80 m
L x w x h stowed	2,82 x 1,03 x 1,98 m	2,93 x 1,03 x 1,98 m	3,05 x 1,03 x 2,14 m	3,66 x 1,20 x 1,98 m
Gradeability	20%	20%	20%	30%
Maximum tilt value	2°	2°	2°	2°
Weight	2600 kg	2980 kg	3300 kg	4350 Kg
Ground pressure	824 KN/ m2	932 KN/ m2	1020 KN/ m2	1569 KN/ m2

✕ SCISSOR LIFT



	CX 15
Working height	15,00 m
Platform height	13,00 m
Maximum lift capacity	700 kg
Lift capacity on extension	200 kg
Length x width x height stowed	4,86 x 2,30 x 2,99 m
Platform dimension with extensions	7,30 x 2,22 m
Front and rear extension	2 x 1,25 m
Height with barrier stowed	2,23 m
Gradeability	45%
Maximum tilt value	2°
Weight	7300 kg
Ground pressure (on wheels)	1148 KN/m2
Ground pressure (on outriggers)	687 KN/m2

✕ ARTICULATED BOOMS



	ZEBRA 12	ZEBRA 16	ZEBRA 16 4x4x4
Working height	12,20 m	16,40 m	16,40 m
Platform height	10,20 m	14,40 m	14,40 m
Horizontal reach	8,50 m	9,30 m	9,30 m
Lift capacity	230 kg	230 kg	230 kg
Up and over clearance	4,28 m	7,40 m	7,40 m
Turntable rotation	2 x 178°	360° NC	360° NC
Platform rotation	2 x 90°	2 x 90°	2 x 90°
Jib	/	133°	133°
Platform dimension	1,51 x 0,86 m	1,80 x 0,86 m	1,80 x 0,86 m
L x w x h stowed	6,05 x 1,99 x 2,10 m	7,12 x 2,24 x 2,25 m	7,12 x 2,24 x 2,25 m
Gradeability	40%	45%	45%
Maximum tilt value	4°	5°	5°
Weight	5250 kg	7200 kg	7350 kg
Ground pressure	1275 KN/m2	1422 KN/m2	1422 KN/m2

✕ ARTICULATED BOOMS WITH OUTRIGGERS



	ZEBRA 16 STAB	ZEBRA 16 STAB 4x4x4
Working height	16,80 m	16,80 m
Platform height	14,80 m	14,80 m
Horizontal reach	9,30 m	9,30 m
Lift capacity	230 kg	230 kg
Up and over clearance	7,40 m	7,40 m
Turntable rotation	360° NC	360° NC
Platform rotation	2 x 90°	2 x 90°
Jib	133°	133°
Platform dimension	1,80 x 0,86 m	1,80 x 0,86 m
L x w x h stowed	7,70 x 2,24 x 2,25 m	7,70 x 2,24 x 2,25 m
Gradeability	45%	45%
Maximum tilt value	5°	5°
Weight	8050 kg	8200 Kg
Ground pressure (on outriggers)	670 KN/m2	680 KN/m2

⚡ ✕ TRACK-MOUNTED BOOM



	MYGALE 23
Working height	22,85 m
Platform height	20,85 m
Horizontal reach	11,00 m
Up and over clearance	11,25 m
Lift capacity	230 kg
Platform dimension	0,73 x 1,19 m
Length x width x height stowed	6,68 x 1,19 x 1,93 m
Gradeability	35%
Weight	3 300 kg
Ground pressure (on crawler)	65 KN/m2
Ground pressure (on outriggers)	154 KN/m2