

THOMSON

Service Manual



CHASSIS MT62L

Contents

1. Product Specification.....	2
2. Test and Alignment.....	3
3. Block Diagram.....	22
4. MB Schematic Diagram.....	23
5. PSU Schematic Diagram.....	36
6. Exploded View	
19HS3244.....	38
26C35H.....	39
32C35H.....	41
40C35H.....	42

This manual is the latest at the time of printing, and does not include the modification which may be made after the printing, by the constant improvement of product.

		19HS3244	22HS3244	26C35H	32C35H	40C35F
	Picture					
Market	Going Price Euro at Intro.					
	Target Volume (K)					
	Intro date/month/qtr.	Mar. 2010	Mar. 2010	Mar. 2010	Mar. 2010	Mar. 2010
	Project Start date					
Set Level	Key Distribution Channel/s	MM, BG, CH, TS	MM, BG, CH, TS	MM, BG, CH, TS	MM, BG, CH, TS	MM, BG, CH, TS
	Type Classification	Small Screen	Small Screen	Small Screen	Small Screen	Large Screen
	Sizes	19W	22W	26W	32W	40W
	Chassis platform	MT62L	MT62L	MT62L	MT62L	MT62L
Panel Level	Styling	F11	F11	F10	F10	F10
	Panel Type	Classic	Classic	Classic	Classic	Classic
	BLU	CCFL	CCFL	CCFL	CCFL	CCFL
	Resolution	HD	HD	HD	HD	FHD
	60Hz/120Hz	60Hz	60Hz	60Hz	60Hz	60Hz
	Contrast Ratio	Supplier to specify	Supplier to specify	Supplier to specify	Supplier to specify	Supplier to specify
	Brightness	400nits or Less	400nits or Less	400nits or Less	400nits or Less	400nits or Less
	View Angle	Supplier to specify	Supplier to specify	Supplier to specify	Supplier to specify	Supplier to specify
	Anti reflex coated glass	Supplier to specify	Supplier to specify	Supplier to specify	Supplier to specify	Supplier to specify
	Dynamic Contrast	Yes	Yes	Yes	Yes	Yes
Front End + Digital requirement	Light sensor	No	No	No	Yes	Yes
	Backlight Control	Yes	Yes	Yes	Yes	Yes
	Anlogue/Digital	Digital	Digital	Digital	Digital	Digital
	MPEG2	Yes	Yes	Yes	Yes	Yes
	MPEG4	Yes	Yes	Yes	Yes	Yes
	DVB-T/ T2/ C frontend	DVB-T	DVB-T	DVB-T	DVB-T	DVB-T
	MHEG 1.06	No	No	No	No	No
	CI(PCMCIA)	Yes	Yes	Yes	Yes	Yes
	CI+	No	No	No	No	No
	OAD	No	No	No	No	No
Picture	DVBT CVBS output	Yes	Yes	Yes	Yes	Yes
	Comb Filter	3D	3D	3D	3D	3D
	De-interlacing	3D	3D	3D	3D	3D
Sound	Sound Output	2 X 3W	2 X 3W	2 X 3W	2 X 5W	2 X 5W
	No of Speakers	2	2	2	2	2
	Mono/Stereo/BBE	Stereo	Stereo	Stereo	Stereo	Stereo
Feature	MEMC	No	No	No	No	No
	Teletext	Teletext 1.5	Teletext 1.5	Teletext 1.5	Teletext 1.5	Teletext 1.5
	No of pages(Teletext)	100-1000p	100-1000p	100-1000p	100-1000p	100-1000p
	Close Caption	No	No	No	No	No
	HD Video Playback	No	No	No	No	No
	MP3 Playback	No	No	No	No	No
	Photo viewer	Yes	Yes	Yes	Yes	Yes
	OSD Languages	German, Italy, Czech, Croatian, Danish, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Finnish, Swedish, Turkish, Greek, Bulgarian, Russian, Latvian, Lithuanian, Estonian,	French, German, Italy, Czech, Croatian, Danish, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Finnish, Swedish, Turkish, Greek, Bulgarian,	French, German, Italy, Czech, Croatian, Danish, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Finnish, Swedish, Turkish, Greek, Bulgarian,	French, German, Italy, Czech, Croatian, Danish, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Finnish, Swedish, Turkish, Greek, Bulgarian,	French, German, Italy, Czech, Croatian, Danish, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Finnish, Swedish, Turkish, Greek, Bulgarian,
	PIP/PAT/PAP/PIC/PAC	PAT/PAP	PAT/PAP	PAT/PAP	PAT/PAP	PAT/PAP
	Color tone adjustment	No	No	No	No	No
	Switch on Time	8 seconds	8 seconds	8 seconds	8 seconds	8 seconds
	Time shift	No	No	No	No	No
	12V\24V DC input	No	No	No	No	No
	ECO	Yes	Yes	Yes	Yes	Yes
	Build in IB	No	No	No	No	No
	PC capability (up to maximum f	WXGA	WXGA	WXGA	WXGA	WXGA
	Rear CVBS in	No	No	No	No	No
	Rear CVBS out	No	No	No	No	No
	Rear YPbPr	Yes	Yes	Yes	Yes	Yes
	Rear HDMI	1	1	1	1	1
Rear Connectivity	Audio Output	No	No	No	No	No
	SCART 1	Yes	Yes	Yes	Yes	Yes
	SCART 2	No	No	No	No	No
	PC Input	No	No	No	No	No
	SPDIF	No	No	No	No	No
	Headphone jack	No	No	No	No	No
	Ethernet (RJ-45)	No	No	No	No	No
	Jack audio in 3.5mm	Yes	Yes	Yes	Yes	Yes
	USB connector	No	No	No	No	No
	Side CVBS in	No	No	No	No	No
Side Connectivity	Side HDMI	Yes	Yes	Yes	Yes	Yes
	Side Headphone	No	No	No	No	No
	Side USB	Yes	Yes	Yes	Yes	Yes
Local Keyboard	No of keys	6	6	6	6	6
	Front/Side	Side	Side	Side	Side	Side
Mechanical	Front Cabinet	HG spray paint	HG spray paint	HG spray paint	HG spray paint	HG spray paint
	Back Cabinet	Spray paint	Spray paint	Spray paint	Spray paint	Spray paint
	DVD slot in	No	No	No	No	No
	Remote control	RC199	RC199	RC199	RC199	RC199
	Table Top Stand	Yes	Yes	Yes	Yes	Yes
	Hard Switch	Yes	Yes	Yes	Yes	Yes
	Swivel Stand	No	No	No	Yes	Yes
Misc	Voltage Range	230V	230V	230V	230V	230V
	Standby Power	< 0.3W	< 0.3W	< 0.3W	< 0.3W	< 0.3W
	VESA Mount	Yes	Yes	Yes	Yes	Yes
	Desination	Whole Europe	Whole Europe	Whole Europe	Whole Europe	Whole Europe

Factory Alignment Specification of normal SIACP
For MT5362 serial
Version: V0.1

For the following Chassis:

MT62L:A mini edition of MT62B

MT62S: MT62B + MS6M20(MEMC module) for super slim LCD

MT62F:A full function edition of MT62B

PREPARED BY : Wei Lin DATE : 2010-02-07

APPROVED BY : _____ DATE : _____

Disclosure

The information contained in this document is proprietary to TCL SZ FPD lab and shall not be disclosed by the recipient to third persons without the written permission of the team leader or GM of R&D.

Revision History

Status, Ver	Date, Drafter	Description of changes
V0.10	2010-02-07	This is the first version of normal SIACP • HDMI as the main absolute input • The password of factory menu is 9735

These chassis are designed for European LCD TV with MPEG4. The main chip is from Mediatec (MT5362 series) and supports below inputs and outputs:

class	item	MT62L	MT62S	MT62F	
input & output	ATV (PAL B/G D/K I, SECAM B/G D/K L/L)	√	√	√	
	DTV (DVB-T,DVB-C,DVB-S)	DVB-T	DVB-T DVB-C	DVB-T DVB-C DVB-S	
	HDMI (480i/p, 576i/p, 720p up to 1080i/p, compliant v1.2. with HDCP)	2	5	3	
	VGA		√	√	
	VGA/DVI audio	√	Share with CMP	√	
	CMP (YPrPb can support from 480i up to 1080p,audio)	√	√	√	
	SCART1 (CVBS & RGB,audio)	√	√	√	
	SCART2 (CVBS & YC,audio)				
	Side AV or back AV (CVBS,audio)			Back AV	
	USB player (picture,video,audio)	Picture	Picture, Video, audio	Picture, Video, audio	
	SCART1 output (CVBS,audio)	√	√	√	
	SCART2 output (CVBS,audio)				
	Headphone output			√	
	SPDIF output	Coaxial	Optical	Coaxial	
function	MEMC		√		
	CI+		√	√	
Others	Serial connector	P5	P16	P3	
	I2C connector of MEMC module		PM3		

Serial connector of MT5362 definition:

Pin1:VCC Pin2:RXD Pin3:TXD Pin4:GND

I2C connector of MEMC definition:

Pin1:VCC Pin2:GND Pin3:SCL Pin4:SDA

INFO:

- ✎ All tests and measurements mentioned hereafter have to be carried out at a normal mains voltage (220 ~ 240 VAC)
- ✎ All voltages have to be measured with respect to ground, unless otherwise stated
- ✎ All final tests have to be done on a complete set including LCD panel in a room with temperature of 25+/-7°C
- ✎ The White Balance (color temperature) has to be performed into subdued lighted room after at least **1 hour** of warm-up/burn-in. This is applicable for both Alignment and Picture Performance evaluation at OQA in order to be set free of any temperature drift (colorimetry vs time)

1. Electrical Assembly Alignment**1.1. Preconditions – DC/DC Check**

Before power on, please check the board according to the relevant block diagram and circuit diagram, and make sure that no serious error should destroy the board. For example, the output of DC/DC and LDO should not shorted to ground.

Supply a suited voltage and power on , then check the voltage according to the relevant block diagram , circuit diagram and voltage spec . the error should less than 5% .For example, the voltage for main chip(DV33, AV33,DV18,DV11,etc.), the voltage for DDR (DDRV) , the voltage for amplifier(AUDIO_PWR),etc. Only the standby voltage is necessary if there is no software in the flash .

1.2. SW download

Download the latest release MT62_SW into the flash using MTK SW tool. See Appendix② “How to download FLASH SW”. Or upgrade the SW from USB port if there is a initial SW in the falsh and the set can work normally See Appendix③” How to upgrade FLASH SW from USB”.

Download the latest release MEMC_SW (skip this step if no MEMC module on the chassis). See Appendix④ “How to download FLASH SW for MEMC module”.

1.3. Panel ID check and modify

There is different ID stored in the NVM depended on different Panels. Modify it with Hyper terminal if the initial ID or a wrong ID make the set can not display clearly. See Appendix⑤. It can be checked and modified in **Factory menu->Feature->Panel ID** if the set can display clearly . The set should be restart if the panel ID is changed .

1.4. Functional Test

Once the boards (chassis, KB, IR, PSU...) and the panel are well interconnected, connect all external generator devices to relevant inputs/outputs below according to their respective test patterns format and check picture content and sound quality accordingly:

Source	Test signal (generator)	Test pattern (format/image)
Analog /Digital Tuner	RF cable	Full Band (VHF/UHF) + CATV DVB-T
Composite(CVBS)	Chroma/Fluke	PAL Half Color & Gray bars
SCART1 (CVBS) SCART1 (RGB)	Chroma/Fluke	PAL Half Color & Gray bars Half Color & Gray bars
SCART2 (CVBS) SCART2 (Y/C)	Chroma/Fluke	PAL Half Color & Gray bars
VGA	Chroma/QuantumData	1024x768@60Hz

		Half Color & Gray bars
CMP (YPrPb)	Chroma/QuantumData	1080i@60Hz Half Color & Gray bars
HDMI	DVD with HDMI compliancy	Movie 720p@60Hz
Headphone	RF cable	First channel
Loud Speakers	RF cable	First channel
SCART1 (CVBS out)	RF cable	First channel
SCART2 (CVBS out)	Chroma/Fluke	PAL Half Color & Gray bars

Audio tones can be defined by the factory (ie: 1KHz & 3KHz, sweep, ...).

Picture video formats can be changed by the factory according to their own standard.

1.5. ADC Calibration

To ensure the ADC performance, the error of “generator+cable” must be less than 2%. The following inputs require an ADC calibration for the time being.

- **VGA**(skip this step if no VGA input on the chassis)

Provide a test signal **1024×768@60Hz** with **WhiteBlack squares**.

Select the corresponding **FactoryMenu-> ADC Calibration-> Auto Color** , then press “OK” key on RemoteControl to start. Value of status will change to “OK” if succeed.

- **CMP**

Provide a test signal **720p@60Hz** with **100% 8 steps ColorBar**.

Select the corresponding **FactoryMenu-> ADC Calibration-> Auto Color** , then press “OK” key on RemoteControl to start. Value of status will change to “OK” if succeed.

- **Scart RGB**

Provide a test signal **PAL 576i** with **100% 8 steps ColorBar**.

Select the corresponding **FactoryMenu-> ADC Calibration-> Auto Color** , then press “OK” key on RemoteControl to start. Value of status will change to “OK” if succeed.

The mean of status value:

“**NONE**”= no input is successful in ADC calibration.

“**OK**”= current input is successful in ADC calibration.

“**NOK**”= current input is fail in ADC calibration.

“**ALL**”= all inputs required are successful in ADC calibration.

R Gain, G Gain, B Gain, R Offset, G Offset, B Offset in **FactoryMenu-> ADC Calibration** page can be fine-tuned if necessary but not required.

1.6. DDC & EDID Test

The E-EDID data structure are according to VESA Enhanced EDID 1.3 (and EIA/CEA-861B for HDMI).

Both VGA and HDMI have their own separate bin files:

For EDID check, it's needed to check whether the correct EDID is downloaded by checking corresponding EDID NVM Checksum or read them out to check bit by bit if it is in line with the released EDID bin file.

1.7. HDCP Test

For HDCP compliancy, it's needed to check whether the HDCP key has been well set.

1.8. CI+ Key activation and test(This step is only for the models with CI+ function)

Select factory menu-> **Update CI+ Credential-> Update CI+ Credential** , then press "OK" key on RemoteControl to active the CI+ KEY. The Valid(CI+ state) state turn to "Yes" and Cus Code(Custom Code), Serial Num display if succeed. Download the CI+ Key and try to active it again if fail.

2. Final Assembly Alignment

2.1. FactoryMenu

Follow the below steps to pop-up the Factory Menu in case of "**FactoryKey**" is disable:

- press RemoteControl key "**MENU**" to display main menu
- Select "Picture" and press "**OK**" key to enter the picture submenu
- Select "Contrast" item
- press the subsequence RemoteControl keys "**9**", "**7**", "**3**" and "**5**"

Press RemoteControl key "**Blue**" To pop-up the Factory Menu in case of "**FactoryKey**" is enable.

The status of "**FactoryKey**" can be changed in **FactoryMenu->System-> FactoryKey**

Press RemoteControl "**OK**" key or "**RIGHT**" key to enter the submenu.

Press RemoteControl "**Menu**" key to go back to the root menu.

Press RemoteControl "**RIGHT**" or "**LEFT**" key to change the values.

Press RemoteControl "**OK**" key run the function.

Press RemoteControl "**Exit**" key exit the factorymenu.

2.2. Entering to "P" Mode

Turned on the factory key to enter into "**P**" mode.The TV will display "**P**" in bottom left corner in "**P**" mode.

2.3. White Balance Alignment

Make sure that the picture mode is "**vivid**", enter to "**P**" mode(turned on the factory key) and switch off "**Pic. Enhance**" in **Factory Menu-> WD Alignment** before white balance alignment .

VGA,CMP,SCART RGB,DTV,CVBS_PAL Color Coordinates are relative to HDMI.

CVBS_SECAM and **CVBS_NTSC** Color Coordinates are relative to CVBS_PAL.

Warm and **Cool** Color Coordinates are relatives to **Normal** mode.

Only **HDMI(YUV 720p@60Hz)** input requires color temperature adjustment. **All the Relative Matrix Offsets** should be set while doing alignment.

Expected Targets and Tolerances

The measured parameters should be "x, y" coordinates.

The White Balance alignment should be performed using a contact less analyzer (ei: Minolta CA-210). The analyzer may not touch the screen surface, and measurement must be performed in a

dark environment keeping the probe(s) at 90+/-2° from the panel.

The result should measure up the relevant spec.

The alignment have to fulfill the requirements in Application Form.

▪ **Alignment FlowChart**

Provide a test signal on the input and align the WB as described inside attached document ensuring first that the BackLight value is matching below table:



2.4. High Pot. and Insulating Resistance Tests

At the end of the process, a High Pot. and an Insulating Resistance tests are required for matching Safety Electrical requirements (ei: xxxx)

▪ **High Voltage Withstanding requirements**

- | | |
|-------------------------|------------|
| - "Voltage" | ⇒ 4240 VDC |
| - "Max Leakage Current" | ⇒ 1 mA |
| - "Test Time" | ⇒ 3 sec |

▪ **Insulating Resistance requirements**

- | | |
|-------------------|----------|
| - "Voltage" | ⇒ DC500V |
| - "Threshold Max" | ⇒ |
| - "Threshold Min" | ⇒ 4M Ω |
| - "Test Time" | ⇒ 3 sec |

3. Factory default settings

Do the "Reset shop" before packing. The detail of reset shop follow OOB setting.

"Factory Menu" Definition

1). System

Factory Alignment Specification of normal SIACP

Item	Sub-item	Value	Note
System	Factory Key	Off/On	OFF: hotkey is invalid ON : hotkey(blue key) is availability
	Power Mode	Boot/Standby/ Last Status	Boot: Enter power on mode Standby: Enter standby mode Last Status: power on according to last status
	Burning Mode	Off/On	Select panel On with left/right key, Press "EXIT" key to enter the burning mode; Press "Menu" key on keyboard to exit the burning mode
	Pre-Frequency Poland	Run	Press "OK" key to run
	Pre-Frequency Huizhou	Run	Press "OK" key to run
	Pre-Frequency Thailand	Run	Press "OK" key to run
	Reset User		Clear date of NVM in user menu,except the value of language / related installation/Factory setting,then set to the default value.
	Reset All		clear NVM values, and set to default value.
	Reset Shop		Clear date of NVM in user menu,include the value related installation,and Clear date of factory menu except the item of Balance and sound ,set to default value

2). Feature

Item	Sub-item	Value/Sub-item	Note
Feature	FleshTone	Off/On	
	Adaptive Luma Control	Off/On	
	Light sensor	Off/On	Some models have have no this feature.
	Adaptive Backlight	Auto/Low/Mid/High (it should be "On/Off" in 26 inch and smaller ones)	Set the backlight mode
		Backlight Low	Set the backlight value of Low mode
		Backlight Mid	Set the backlight value of Mid mode
		Backlight High	Set the backlight value of High (or Off) mode
		ADP low control point	Set the low point in dynamic backlight control curve
		ADP mid control point	Set the mid point in dynamic backlight control curve
		ADP high control point	Set the high point in dynamic

			backlight control curve
	White Peak Liminator	Off/On	
	TunerAGC	-44~127	
	Project ID	ID	Select panel ID with left/right key, restart the set to take effect.

In MT62F and MT62S chassises:

There is no “Adaptive Backlight” item, “Auto/Low/Mid/High” “Backlight” “ADP low control point” “ADP mid control point” “ADP high control point” are in the “feature” page. There is only “Backlight” item instead of “Backlight Low” “Backlight Mid” “Backlight High”. It set the backlight value of current backlight mode.

3). ADC Calibration

Item	Sub-item	Value	Note
ADC Calibration	Source	HDMI,etc	VGA/CMP/Scart RGB require Calibration
	Auto color	Run	Press “OK” key to run
	Status	NONE / NOK / OK / ALL	NONE:No source has been calibrated NOK:Current source hasn't been calibrated OK: Current source has been calibrated ALL:All sources have been calibrated
	R Gain		For fine tune ADC manually.
	G Gain		
	B Gain		
	R Offset		
	G Offset		
	B Offset		

4). WD Alignment

Item	Sub-item	Value	Note
WD Alignment	Pic. Enhance	ON/OFF	Press “Right” key to switch off all of the items in the feature submenu. This should be done before white balance alignment. If it's off, the way to switch it on is to reset user/shop or set on the features in Feature sub-item manually.
	Source	HDMI,etc	For balance source: HDMI,VGA,DTV,PAL,SECAM,NTSC,Scart RGB,CPM, HDMI
	Color Temperature	Normal /Warm/Cool	The value of Warm and cool is the offset of Normal mode.
	R Gain		R White balance
	G Gain		G White balance
	B Gain		B White balance
	R Offset		R Gray balance

Factory Alignment Specification of normal SIACP

	G Offset		G Gray balance
	B Offset		B Gray balance
	Scaling Brightness		
	Scaling Contrast		
	Scaling Saturation		
	Auto phase	Run	Press "OK" key to adjust the signal to avoid the ripple in CMP source, it is not necessary.

5). Sound

Item	Sub-item	Value	Note
Sound	VOL_0	0	
	VOL_10	5	
	VOL_50	20	
	VOL_90	145	
	VOL_100	255	

6). Version info

Item	Sub-item	Value	Note
Version info	Project:	***	
	Panel:	***	
	MT62 Ver:	***	
	Date:	***	
	MCU Ver:	***	

7) . Factory Clone& User Clone (MT62S,MT62F have no this function now)

Select "Factory Clone" in the factory menu to enter the factory clone menu

Item	Sub-item	Value	Note
Fac Clone	TV TO USB(Factory)	DO	Press "Right" key to copy the data(WB,ADC,picture setting,etc) to USB
	USB TO TV(Factory)	DO	Press "Right" key to set the data(WB,ADC,picture setting,etc) from USB

Enter another password "6" "4" "0" "5" in "menu" -> "picture" -> "contrast" status to enter the user clone menu

	Value	Note
TV TO USB(user)	DO	Press "Right" key to copy the data(channel map,picture setting,etc) to USB
USB TO TV(user)	DO	Press "Right" key to set the data(channel map,picture setting,etc) from USB

8) . Update CI+ Credential (only for the chassises with CI+ function)

Factory Alignment Specification of normal SIACP

Item	Sub-item	Value	Note
Update CI+ Credential	Update CI+ Credential	DO	Press "OK" key to active the CI+ KEY
	Update from USB	DO	Press "OK" key to download the CI+ KEY from USB
	Erase CI+ Credential	DO	Press "OK" key to erase the CI+ KEY
	Valid		Show the CI+ state
	Cus Code		Show the CI+ custom code
	Serial Num		Show the CI+ serial number

Appendix ① “How to download MCU SW”


Prepare WT_MCU_ISP SW tool for update.

1. Connect the PC to the serial connector on board using a special serial device(USB or COMx).
2. Provide the a correct voltage to the board.
3. Start “Weltrend MCU ISP.exe” and download the MCU SW. (please see file *Visio-ISPToolGuide_ver090.pdf*)

Appendix ② “How to download FLASH SW”

Prepare MTK SW tool for update.

1. Connect the PC to the serial connector on board using a special serial device (USB or COMx).
2. Provide the a correct voltage to the board
3. Start “**MTKTOOL.exe**” application under MTKxx folder, and set the parameters as below picture(notice:select MT836X chassiss):

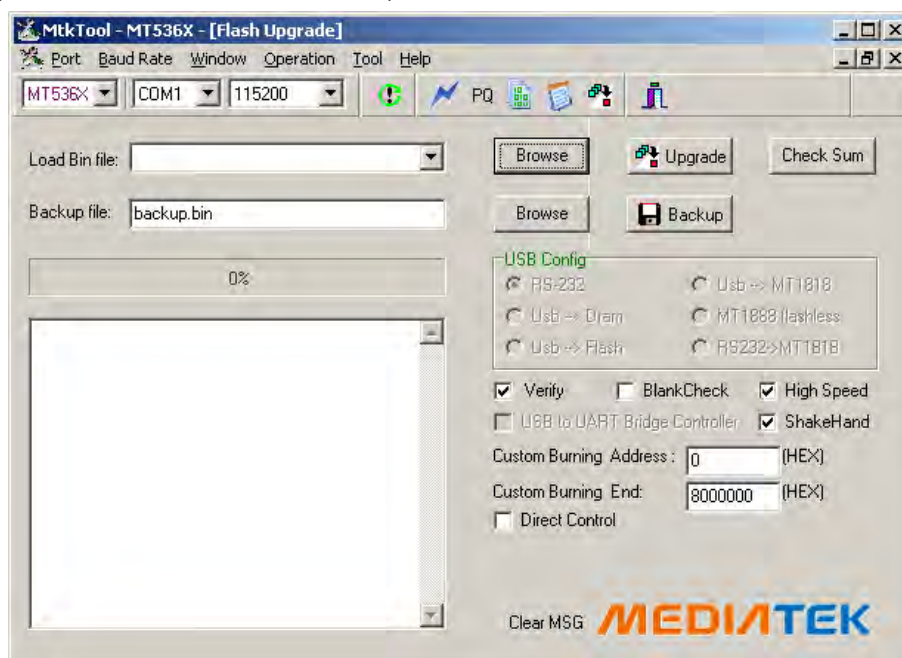

4. Press “Browse” button to select the corresponding SW bin file to upload
5. Press “Upgrade” button to start downloading the SW and wait the gauge displayed “100%” that means the SW has been successfully downloaded.
In the meanwhile, all operations such erasing flash and so... are parsed into the debug window script.
6. Once the SW is downloaded, switch-off/on the chassis board and wait few seconds for eeprom update.

See Appendix③” How to upgrade FLASH SW from USB”

1. Save the new software file(*.pkg) in the root directory of USB, and modify it's name as upgrade.pkg.
2. Plug in the USB.
3. Power on the set.
4. Press any key on keyboard and keep more than 2 second, about 5 second later , the LED on

IR board will flash after upgrade begin. The LED off if upgrade succeed. The LED stop flashing and keep on if upgrade fail, check the set and try again.

If the set display normally, follow the indication instead of Step4.


Appendix 5 “Modify panel ID with Hyper terminal”

- ①. Connect the PC to the board using a special serial device (USB or COMx).
- ②. Provide a correct voltage to the board
- ③. Save the password file “password for hyperTerminal.txt” to your computer.



D:\MT62\调试说明\
已发布\password f


- ④. Start HyperTerminal “HyperTrm.exe” in your computer.
- ⑤. Fill the name.

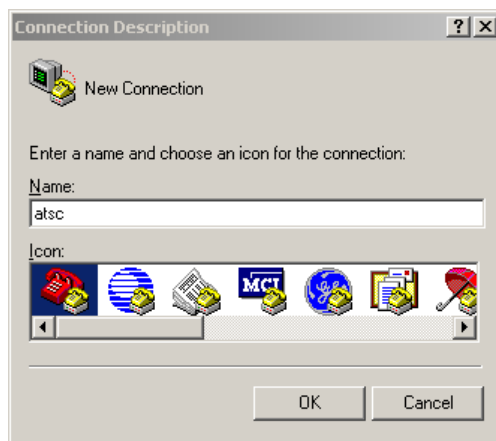

- ⑥. Select the Com Port you are using.




- ⑦. Set the items as below picture.

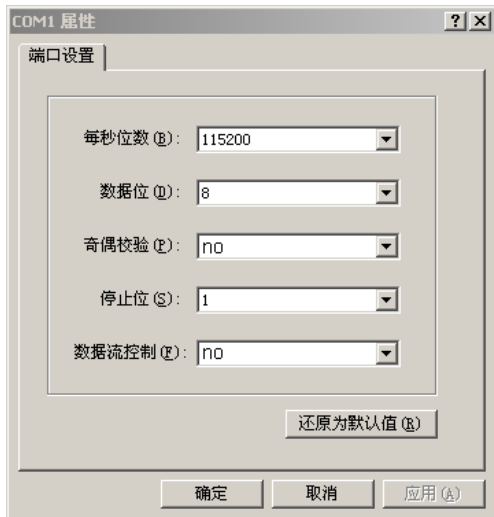


Select "File->Save->" to Save the setting. Then start HyperTerminal "atsc.ht" in your computer instead of step ③ to ⑦ later


⑧. Send the password.

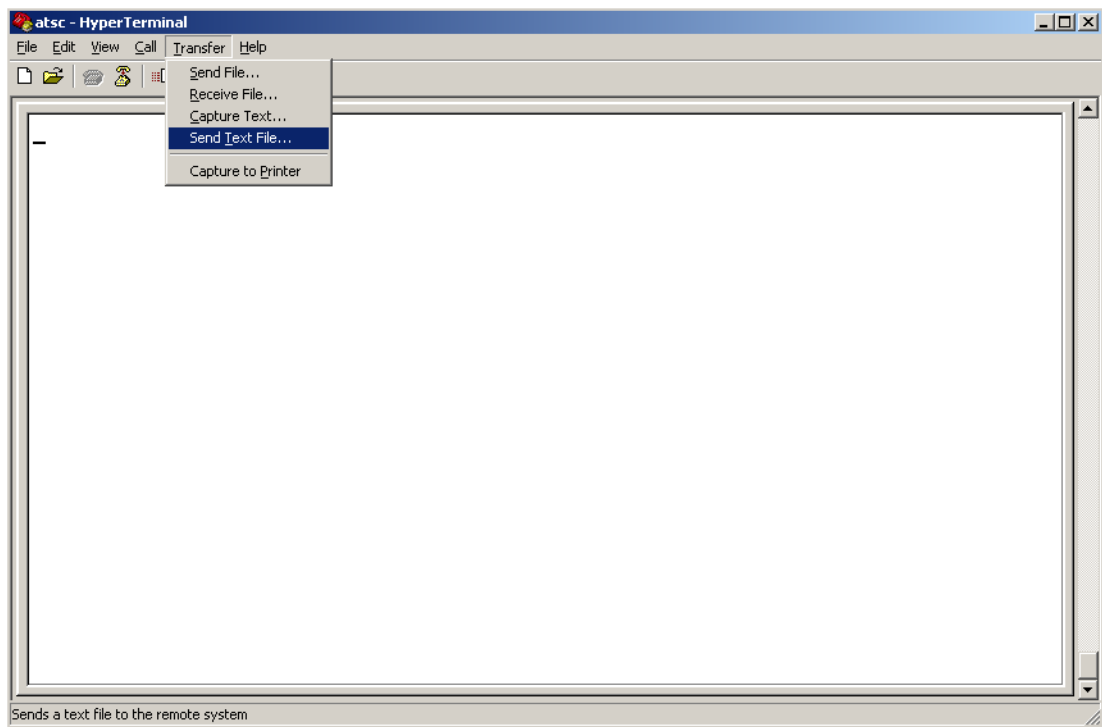

⑨. Select the password file saved in your computer.

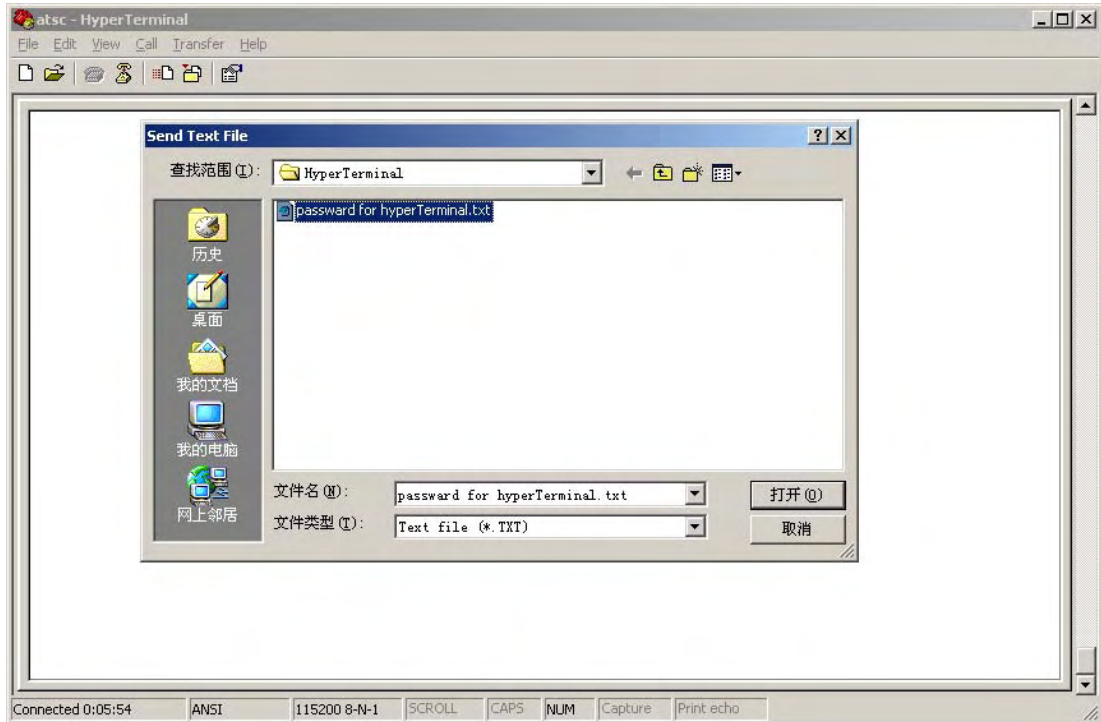

- ⑩. Under the folder “DTV>” enter “pmx.s.p +ID”,e.g.: pmx.s.p 102
See the panel ID in another document <Panel list for MT62>.

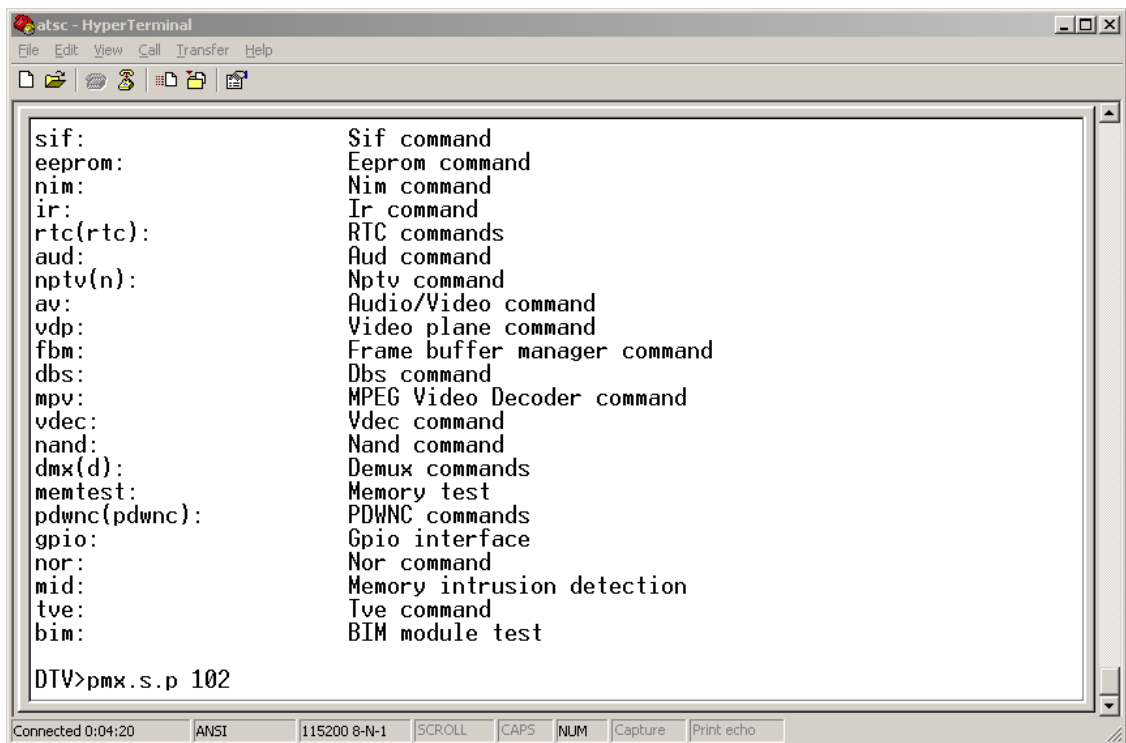

- ⑪. Press “Enter”, the panel signal will be printed in the window

```

atsc - HyperTerminal
File Edit View Call Transfer Help
LVDS_NS, LVDS_ODD_SW_OFF, DUAL_PORT, DISP_30BIT, WFB_PANEL_RESET_OFF, PWM_LOW_PA
NEL_BRIGHT
Backlight[High=0x0, Middle=0x0, Low=0xff]
DimFreq60Hz=0, DimFreq50Hz=0

Delay[LvdsOn=30, BacklightOn=300, BacklightOff=300, LvdsOff=30]
MaxOverscan=30

Current panel setting is PANEL_LC420WUN_SAA1
Backlight gpio=9, turn on value=0, LVDS gpio=1, turn on value=1
Pixel Shift=0 (1920 x 1080)
----- Panel[102] PANEL_LC420WUN_SAA1 1920x1080 -----
PixelClk[Max=154000000, 60Hz=148351648, 50Hz=123750000, Min=119260000]
HTotal[Max=2559, 60Hz=2199, 50Hz=2199, Min=2119] HSyncLen[60Hz=279, 50Hz=279]
VTotal[Max=1200, 60Hz=1124, 50Hz=1124, Min=1090] VClk[Max=63, Min=47]
HSyncWidth=30, VSyncWidth=5, HPosition60Hz=2308428, HPosition50Hz=2288, VPositio
n=1024
LVDS_NS, LVDS_ODD_SW_OFF, DUAL_PORT, DISP_30BIT, WFB_PANEL_RESET_OFF, PWM_LOW_PA
NEL_BRIGHT
Backlight[High=0x0, Middle=0x0, Low=0xff]
DimFreq60Hz=0, DimFreq50Hz=0
Delay[LvdsOn=30, BacklightOn=300, BacklightOff=300, LvdsOff=30]
MaxOverscan=30

Current panel setting is PANEL_LC420WUN_SAA1
Backlight gpio=9, turn on value=0, LVDS gpio=1, turn on value=1
Pixel Shift=0 (1920 x 1080)


DTV>
Connected 0:09:00 ANSI 115200 8-N-1 SCROLL CAPS NUM Capture Print echo

```


Appendix ⑥ “How to download FLASH SW for MEMC module”

Prepare MSTAR SW tool for update:


- Install the driver: CDM_Setup.exe
 - Save the MS_TV folder to your PC,
1. Connect the PC to the I2C connector on board using a special I2C device (USB or COMx).
 2. Provide a correct voltage to the board.
 3. Start “ISP_Tool.exe” application under MS_TV folder:

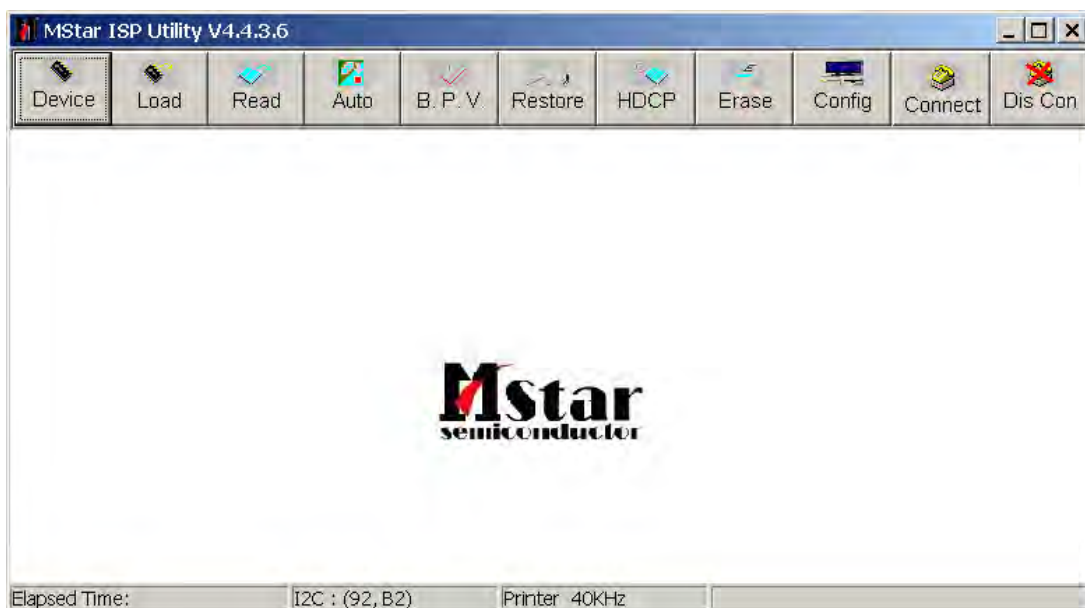


4. Press “config” button On the Menu to enter the corresponding page, change the ISP slave address to “0x94” and confirm that if the Port Type is correct, correct it if not.

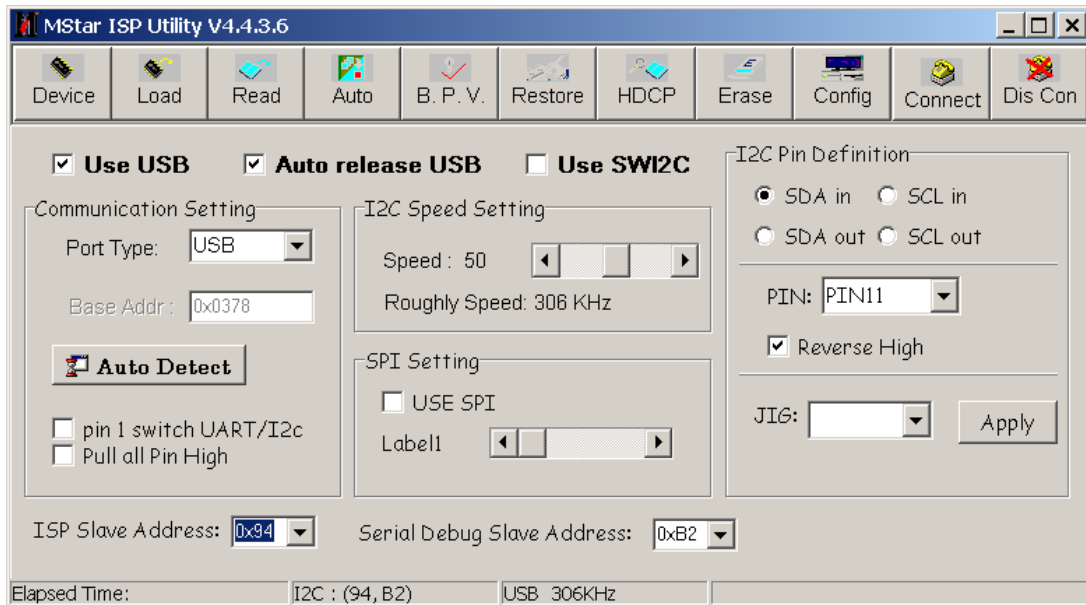


5. Press “Read” button on the Menu to enter the corresponding page and Press “Read” button on this page to load the software(*.bin) on your PC

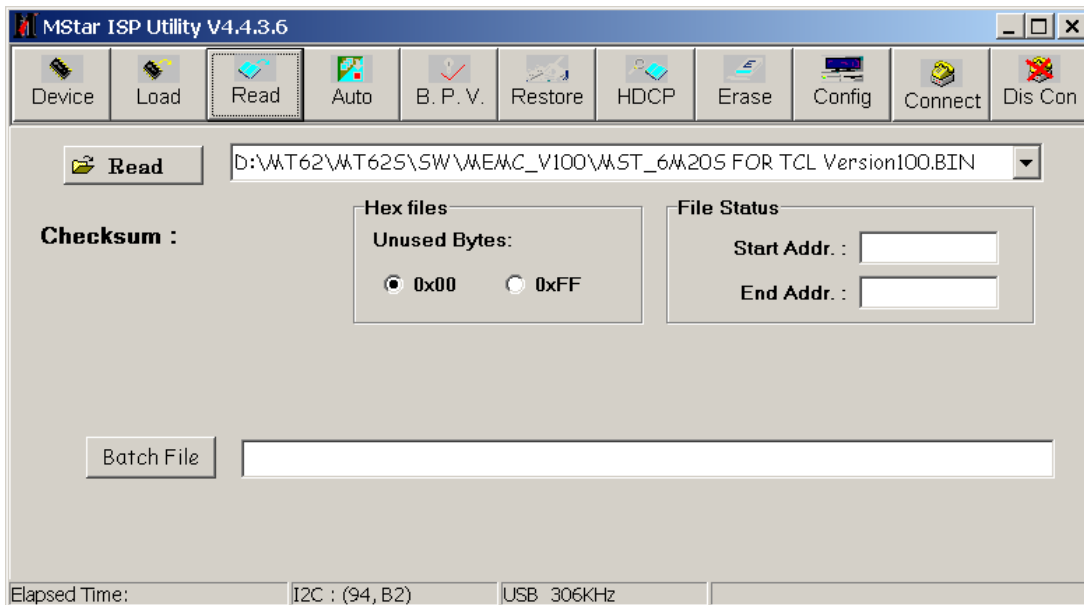


6. Press “Auto” button on the Menu to enter the corresponding page

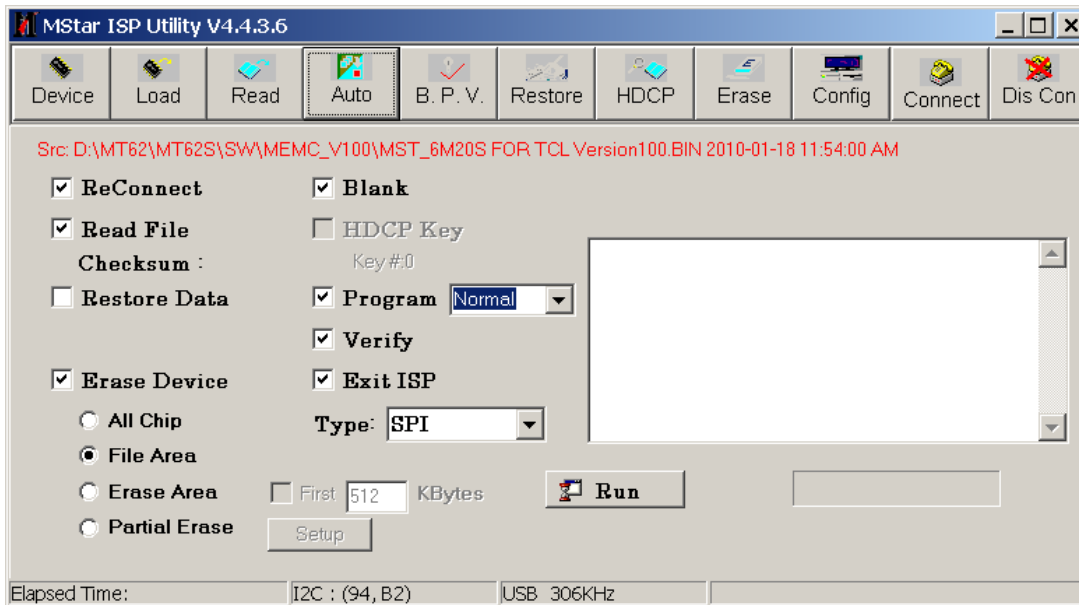


7. Press "Conect" button on the Menu. A message will popup to tell you the result. Press "OK" button to close the message. If fail to connect with "Can't find the Device Type!!" Message ,Check the hardware and parameters setting of the ISP_Tool , Press "Dis Con" button , then "Conect" button again, until it identify the flash memory IC.

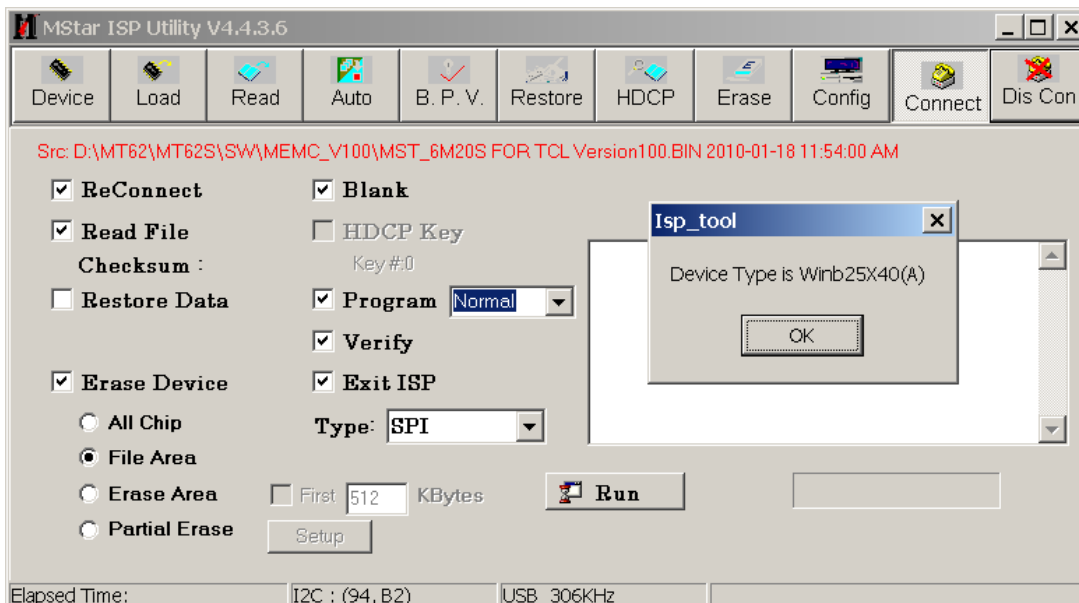



8. Press "Run" button in the current page to download the software."Pass" will display on the right bottom corner if succeed.

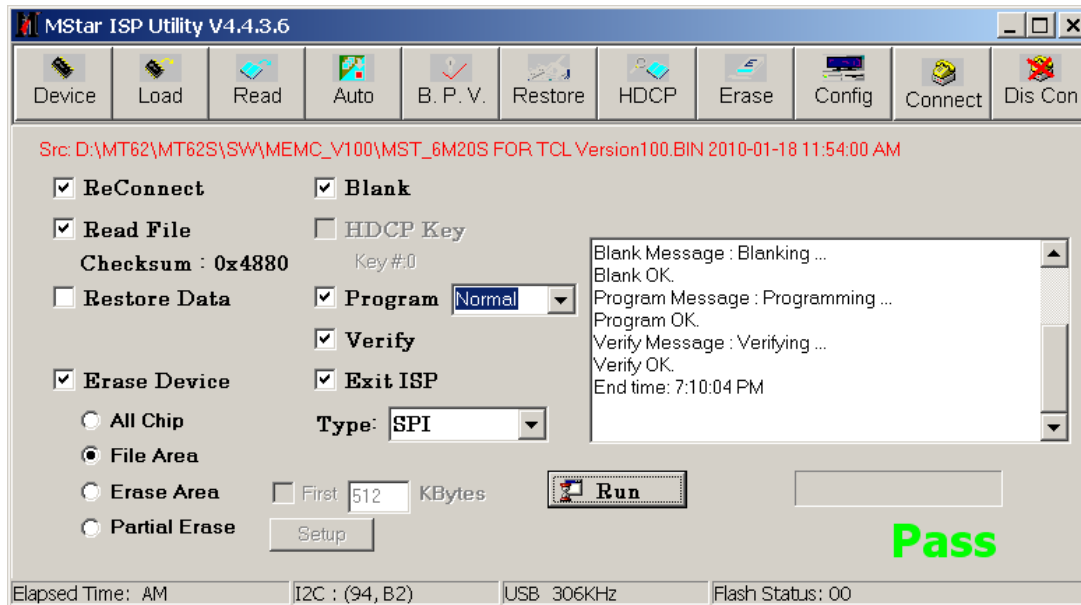




MT62L
Block
Diagram_V1.0

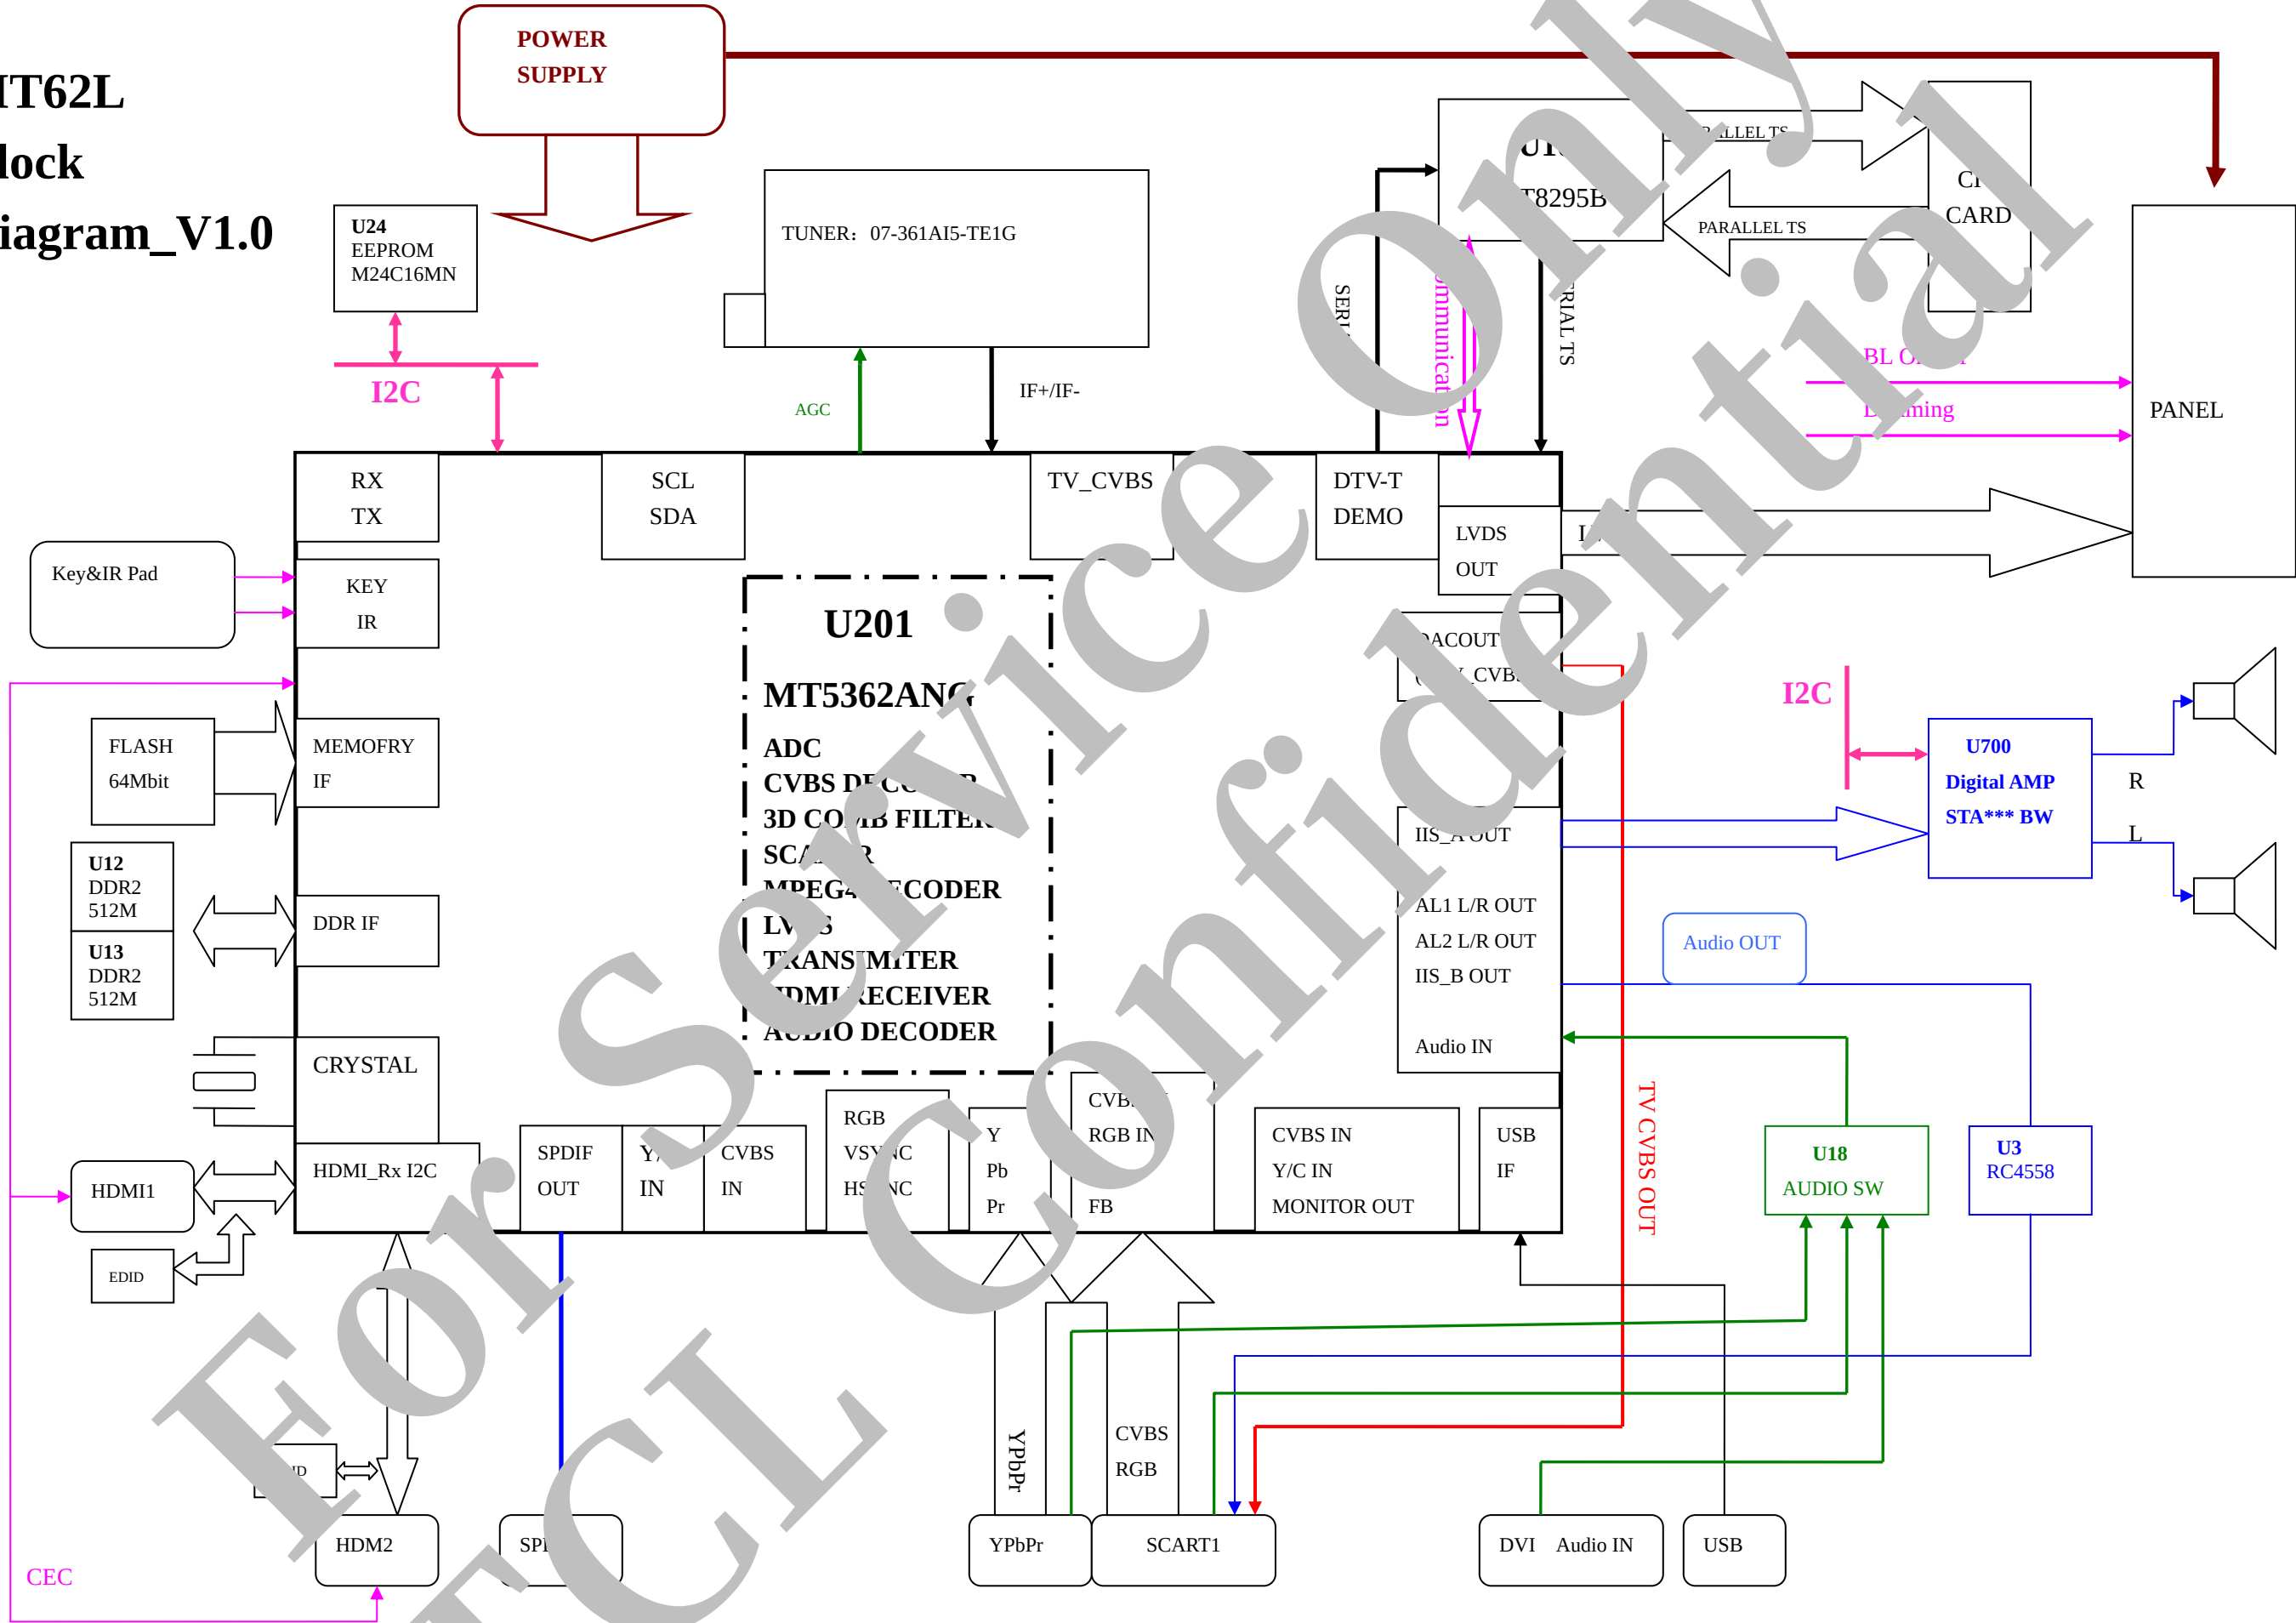


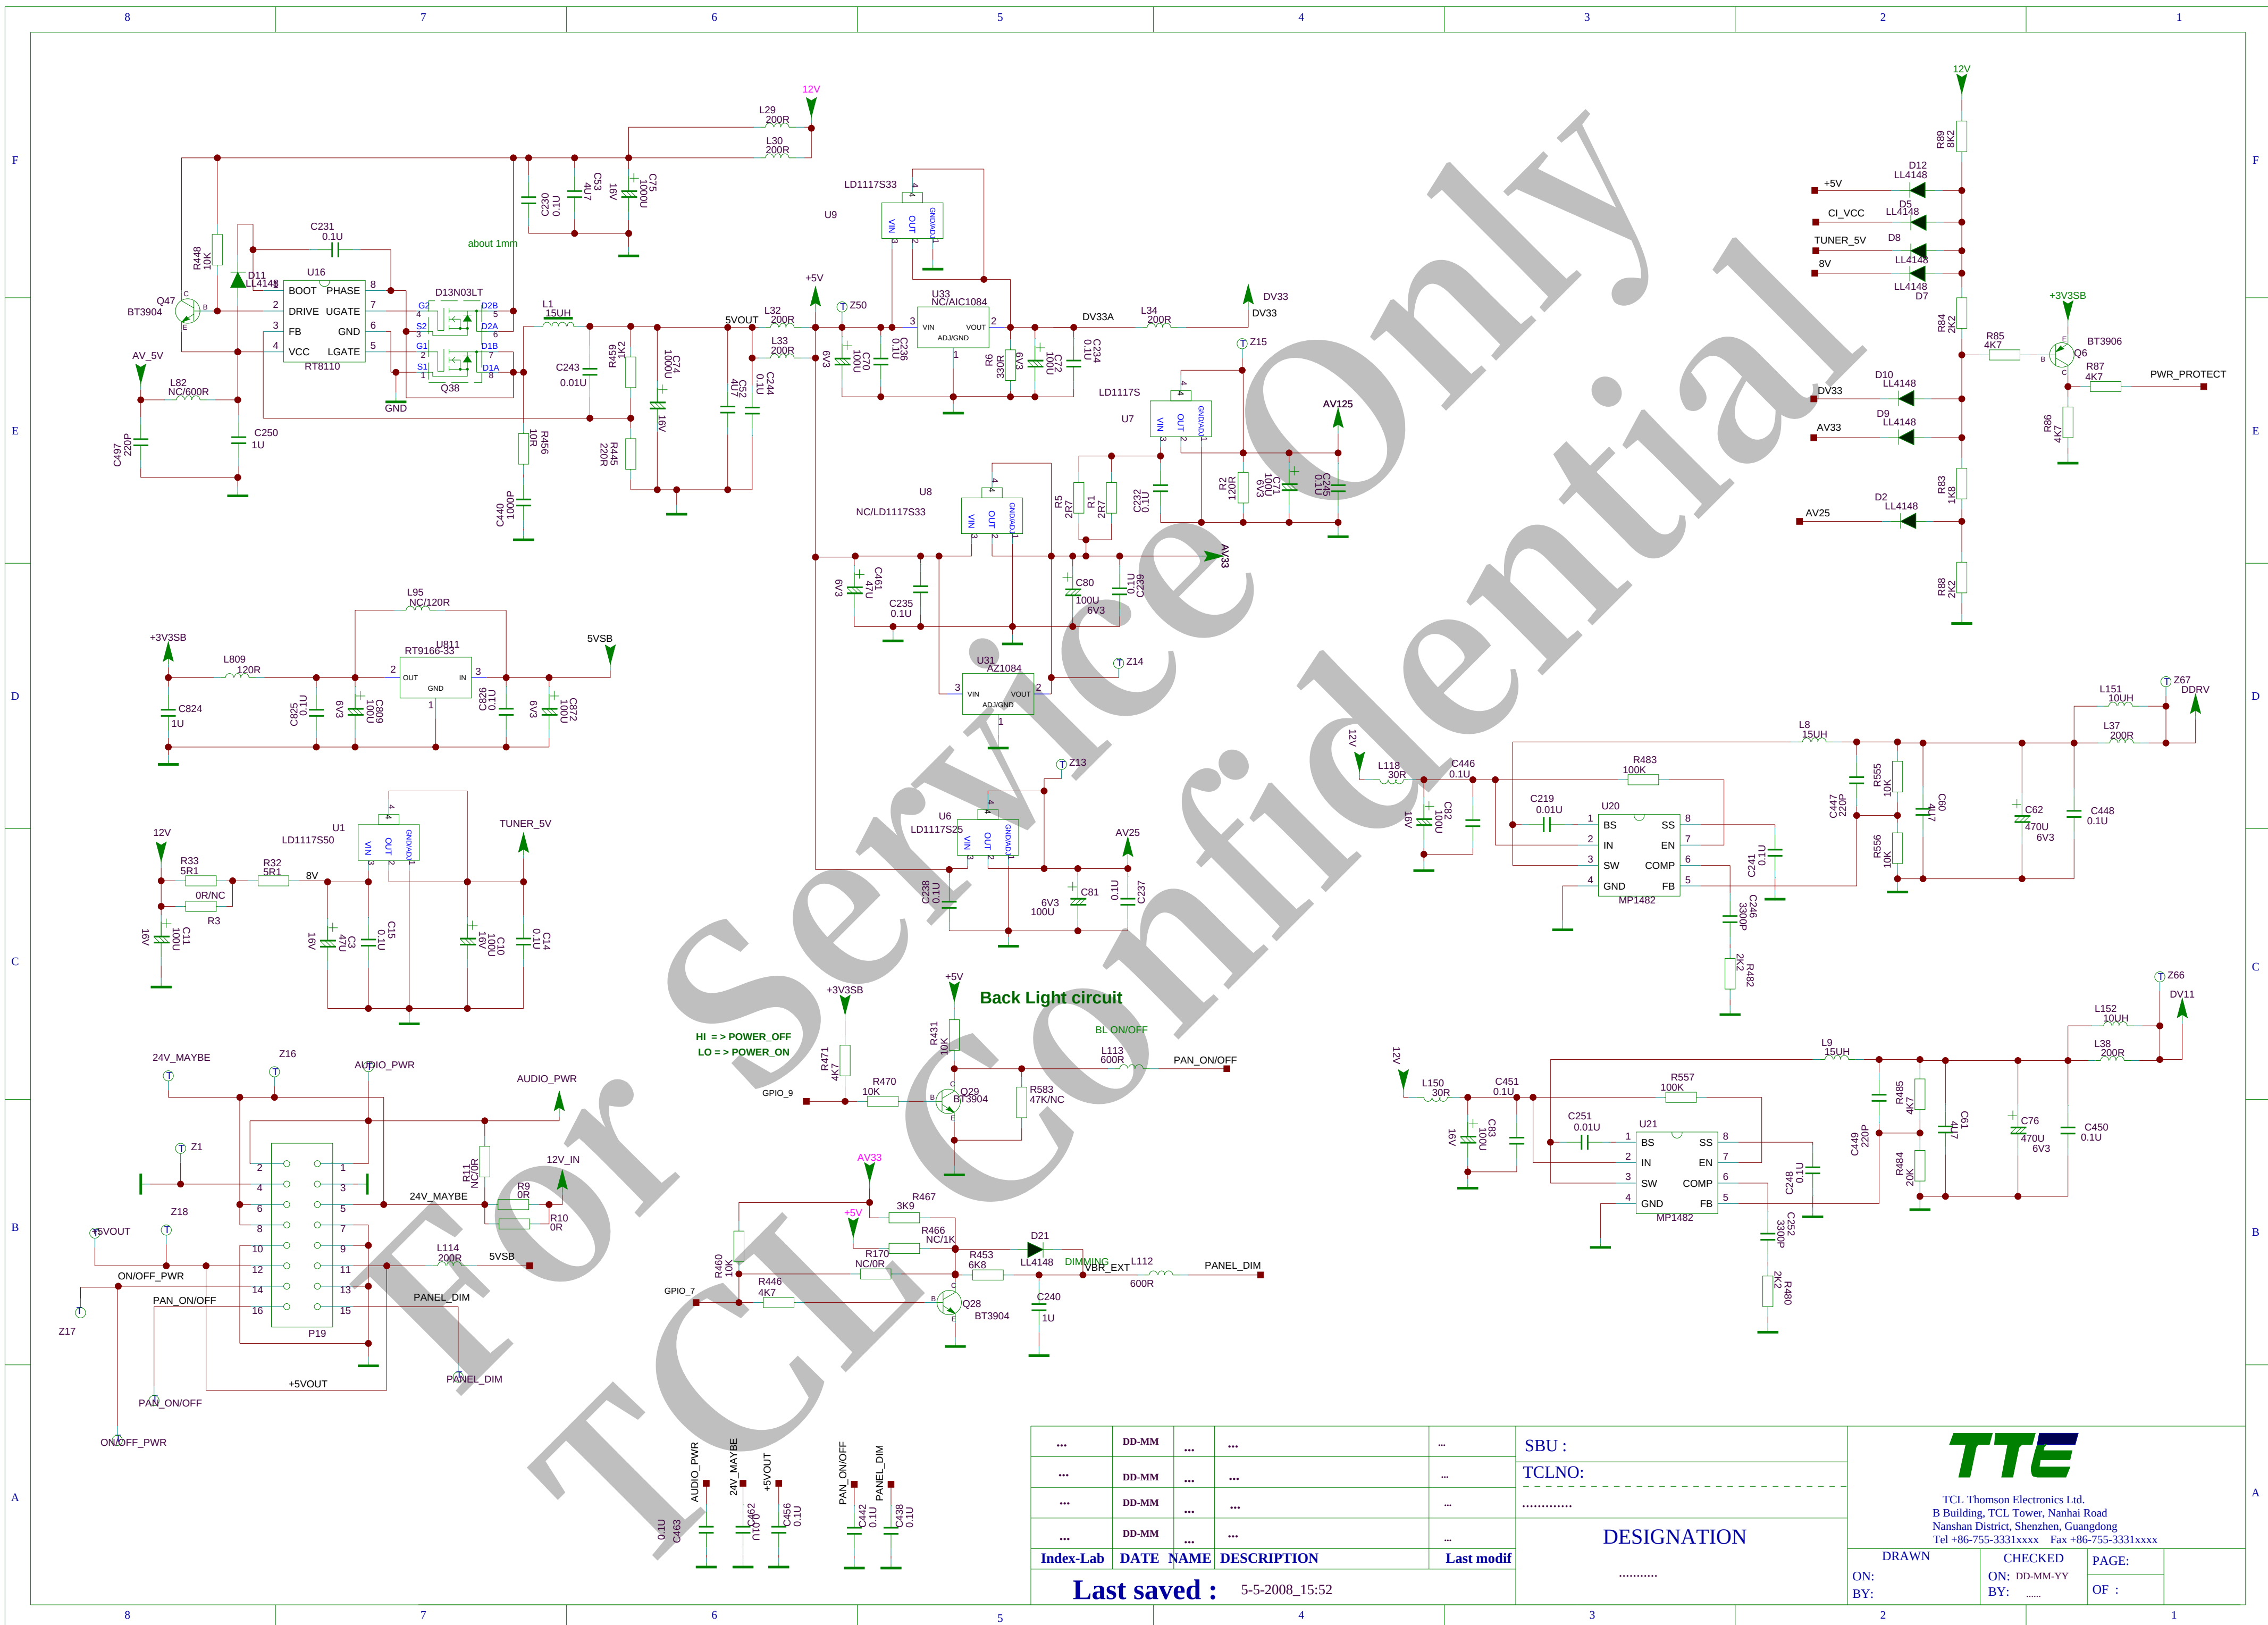


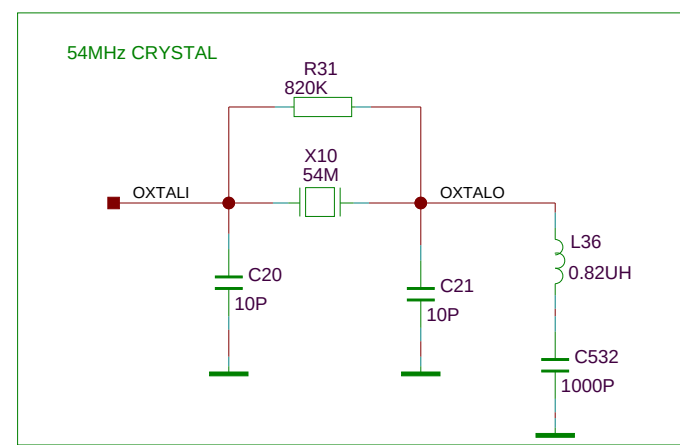



SYSTEM EEPROM

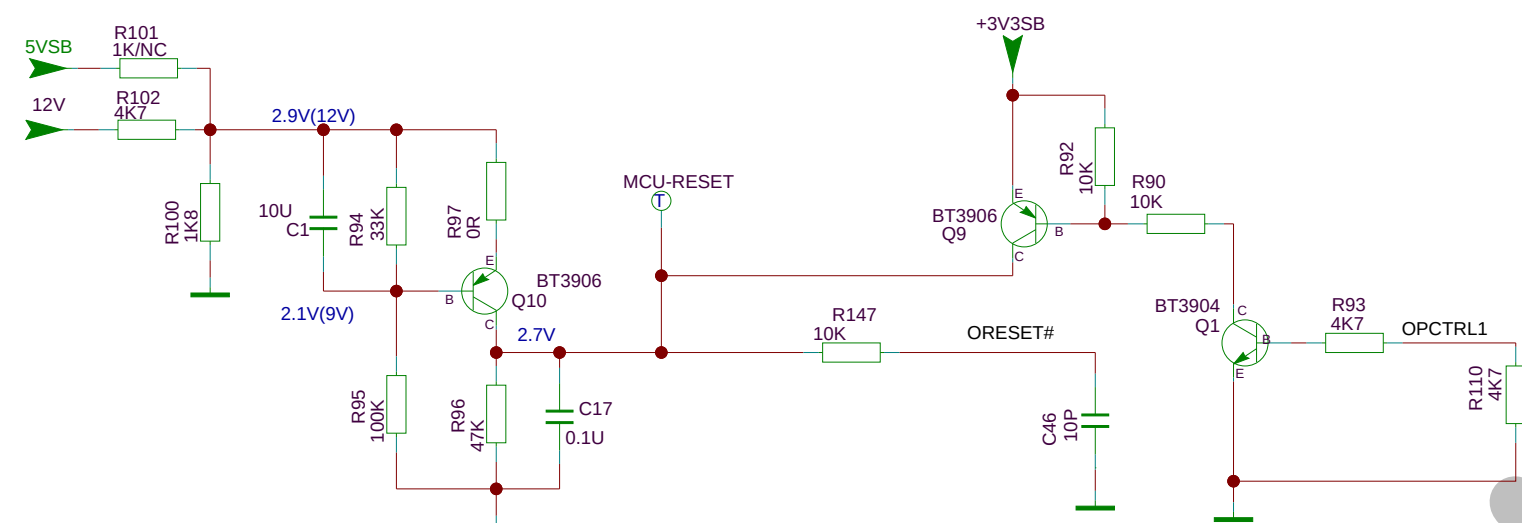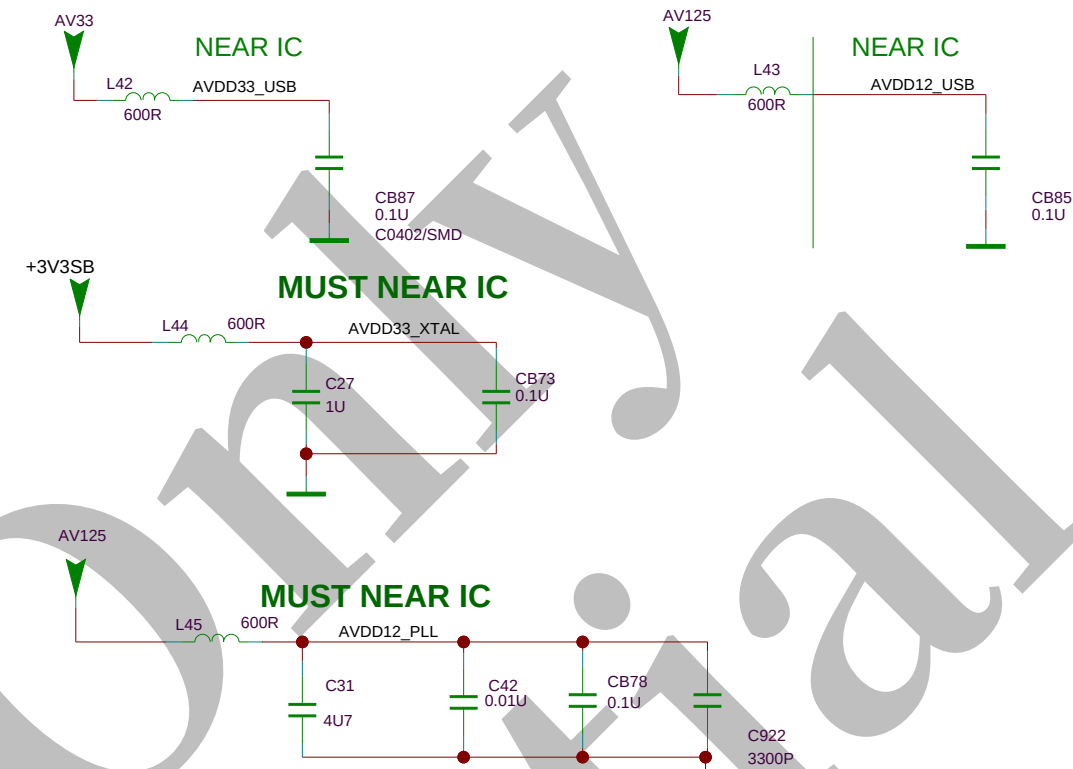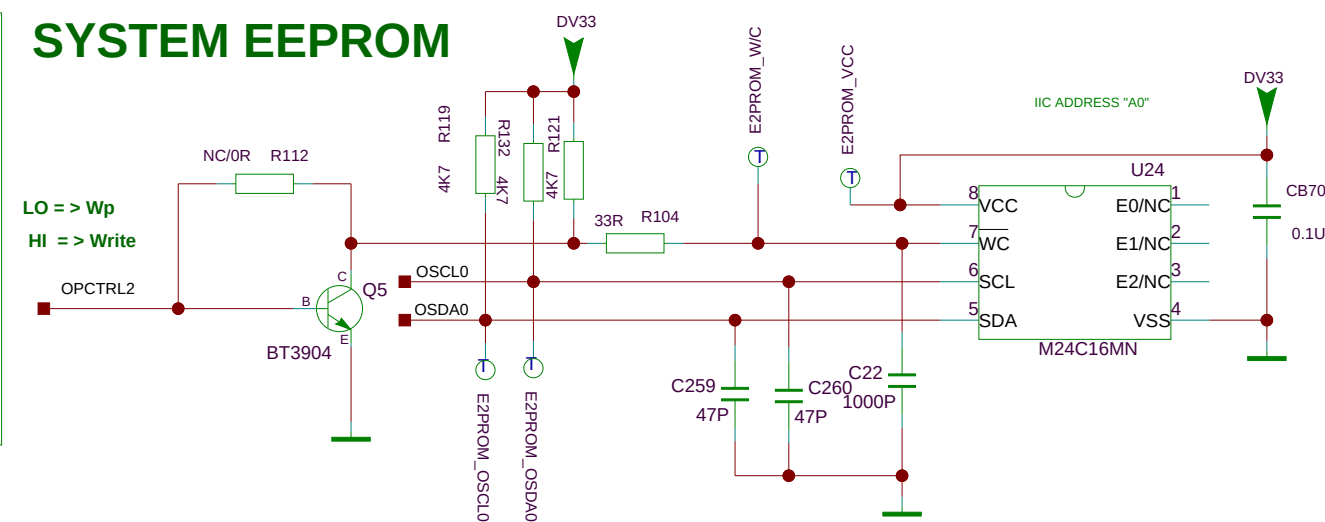

System Reset#

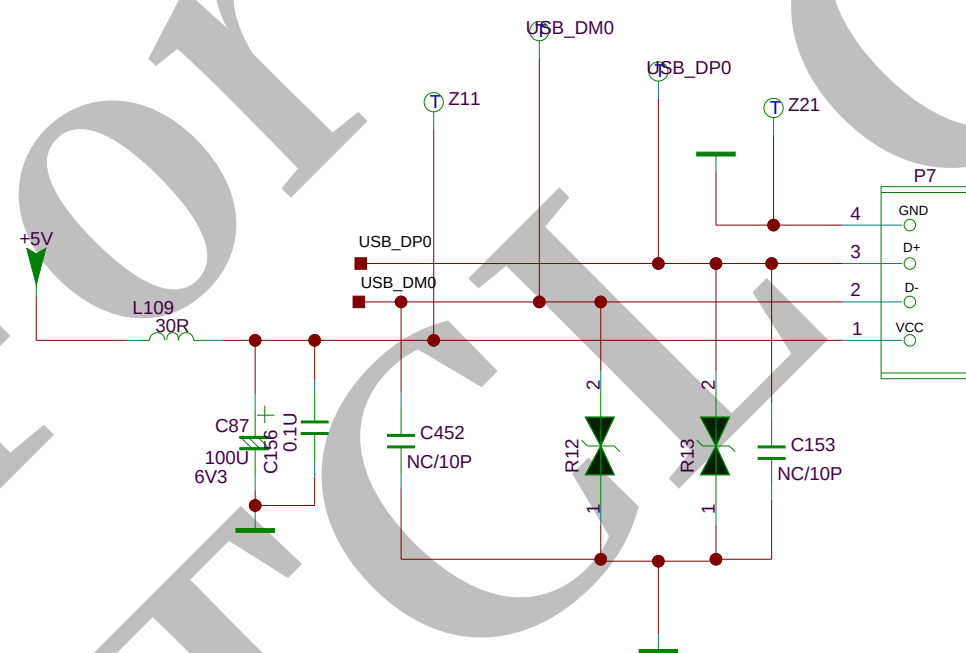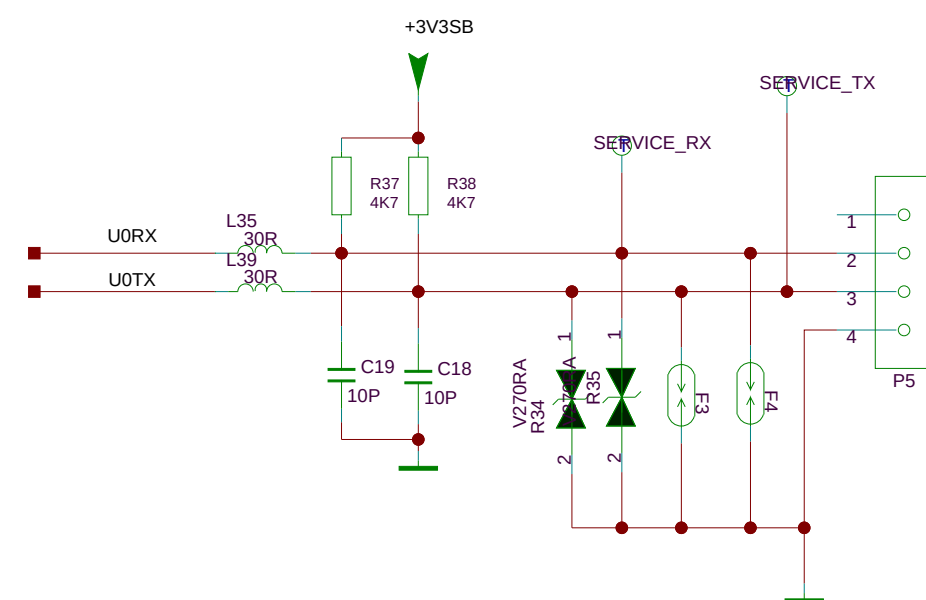

JTAG Port

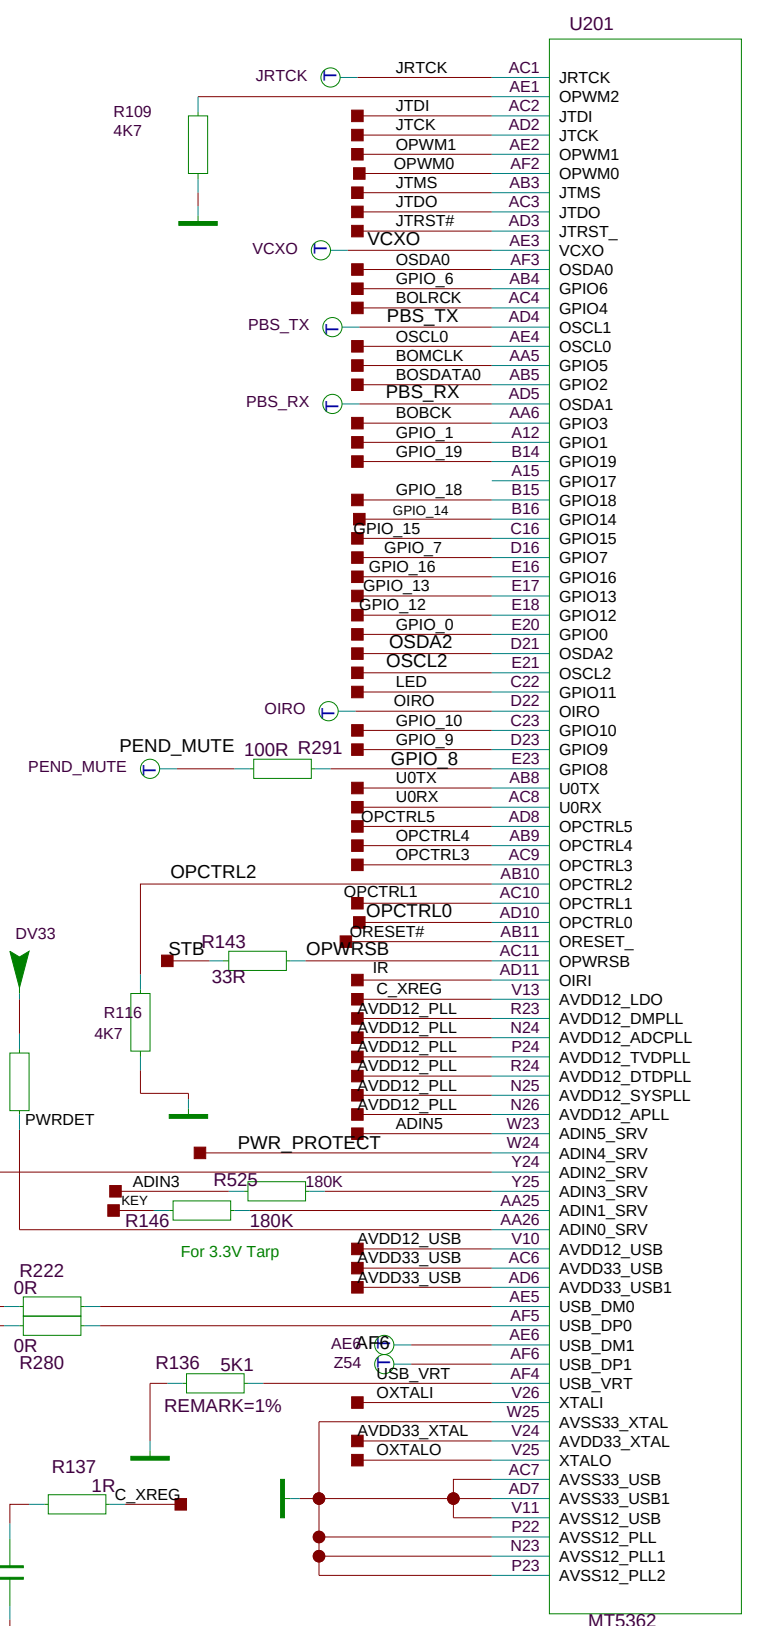
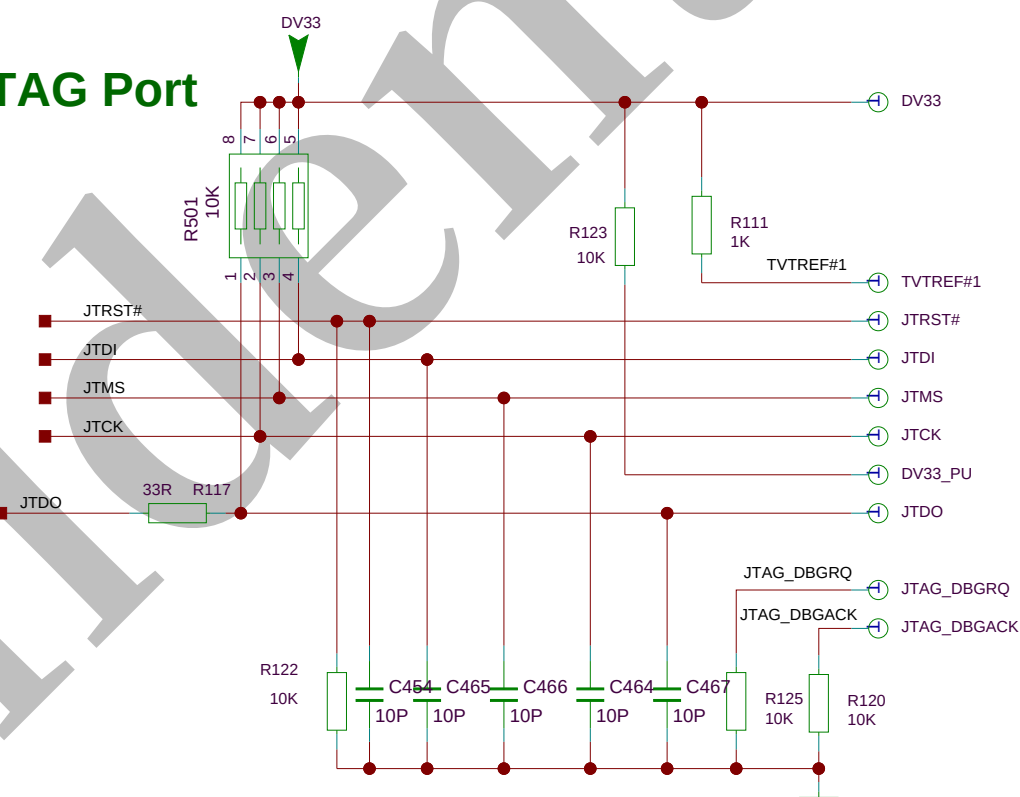


...	DD-MM	...	...	...	SBU :
...	DD-MM	...	...	...	TCLNO:
...	DD-MM	...	...	...	
...	DD-MM	...	...	...	DESIGNATION
Index-Lab	DATE	NAME	DESCRIPTION	Last modif	
Last saved : 5-5-2008_15:52					



TCL Thomson Electronics Ltd.
B Building, TCL Tower, Nanhai Road
Nanshan District, Shenzhen, Guangdong
Tel +86-755-3331xxxx Fax +86-755-3331xxxx

DRAWN	CHECKED	PAGE:
ON:	ON: DD-MM-YY	OF :
BY:	BY:	

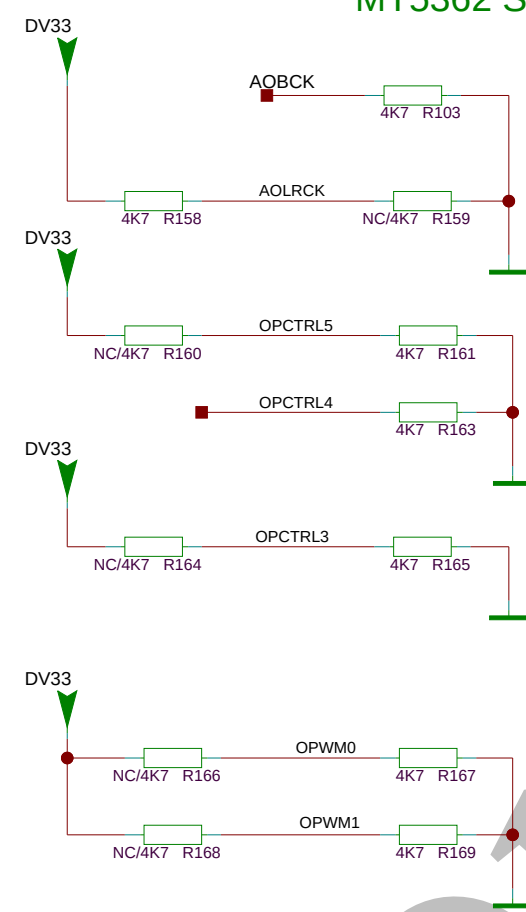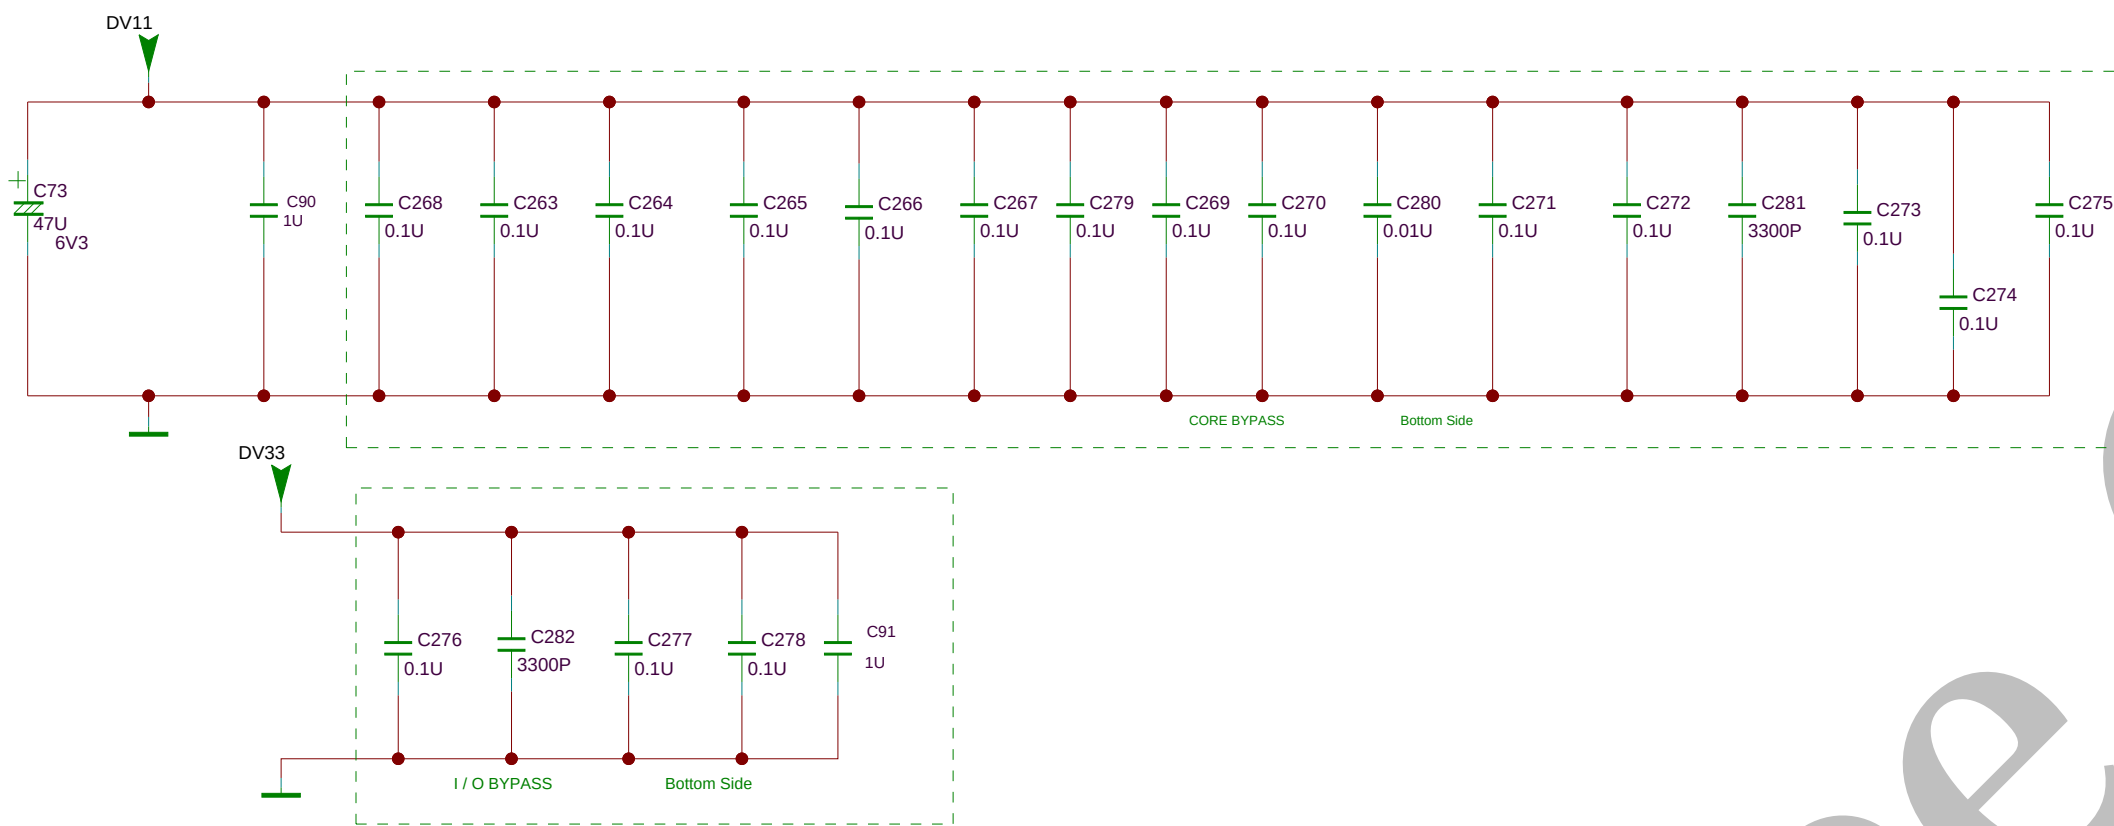


Strapping Mode	OPWM2	AOBCK	AOLRCK
Normal mode	0	0	0
ICE mode	0	0	1
CPU model mode	0	1	0

Trap Mode	OPCTRL5	OPCTRL4
Core Reset 1us	0	0
Core Reset 3.3V	0	1
SCAN mode	1	0
Core Reset 0.9V	1	1

Strapping Mode	OPCTRL3(O)	OPCTRL2(O)
XTAL 54MHz	0	0
XTAL 27MHz	1	0

Strapping Mode	OPWM0(O)	OPWM1(O)
Nor Boot	0	0
NAND Boot	0	1
Large NAND Boot	1	0

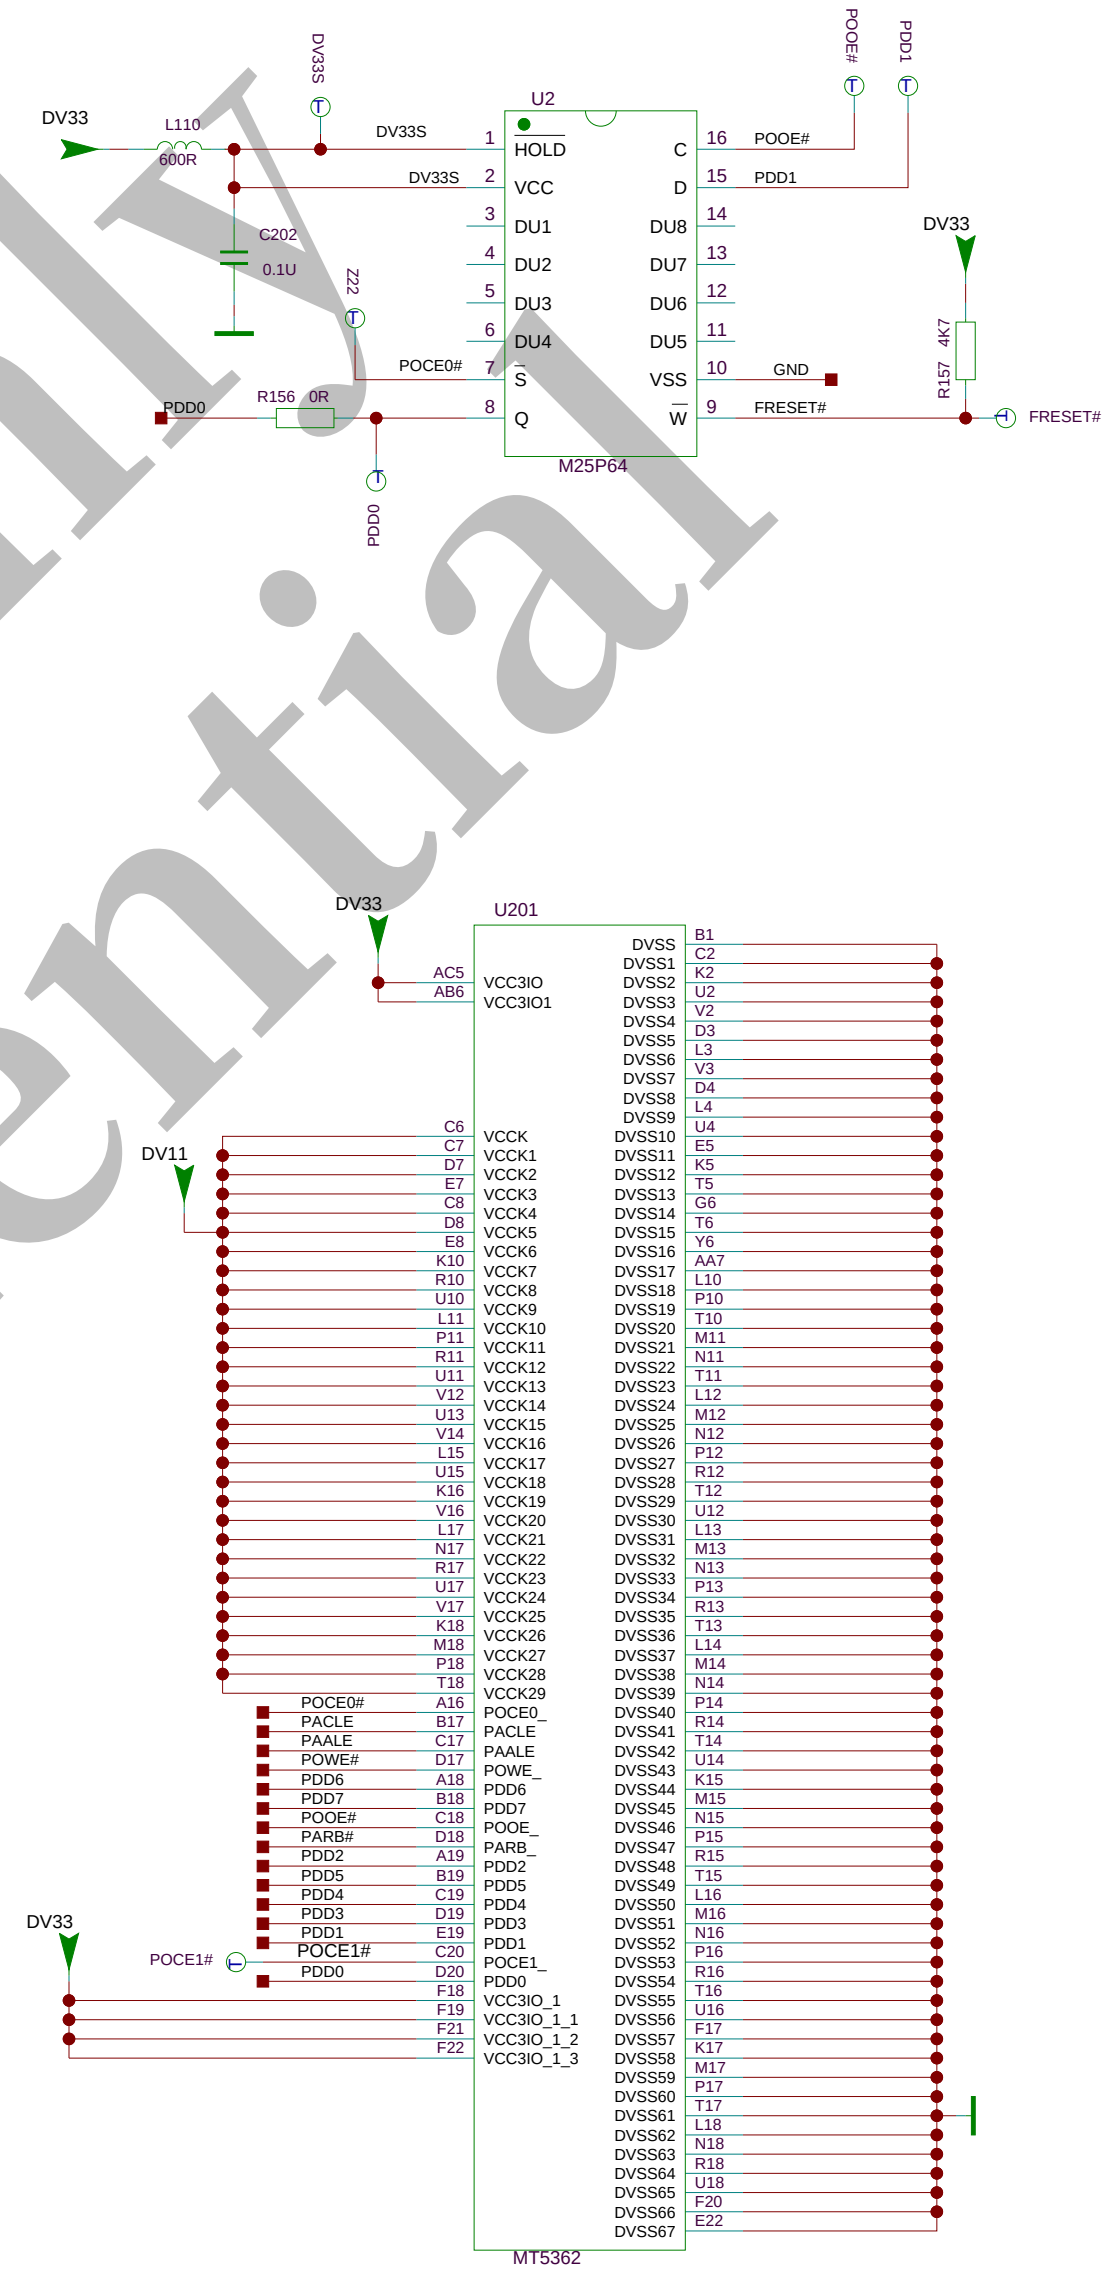

...	DD-MM	...	...	...
...	DD-MM	...	...	...
...	DD-MM	...	...	...
...	DD-MM	...	...	...
Index-Lab	DATE	NAME	DESCRIPTION	Last modified
Last saved : 5-5-2008_15:52				

Last saved : 5-5-2008_15:52


SBU :	
TCLNO:	

DESIGNATION	





TCL Thomson Electronics Ltd.
8 Building TCL Tower, Nanhai Road
Nanshan District, Shenzhen, Guangdong
Tel +86-755-3331xxxx Fax +86-755-3331xxxx

DRAWN	CHECKED	PAGE:
ON:	ON: DD-MM-YY	
BY:	BY:	OF :



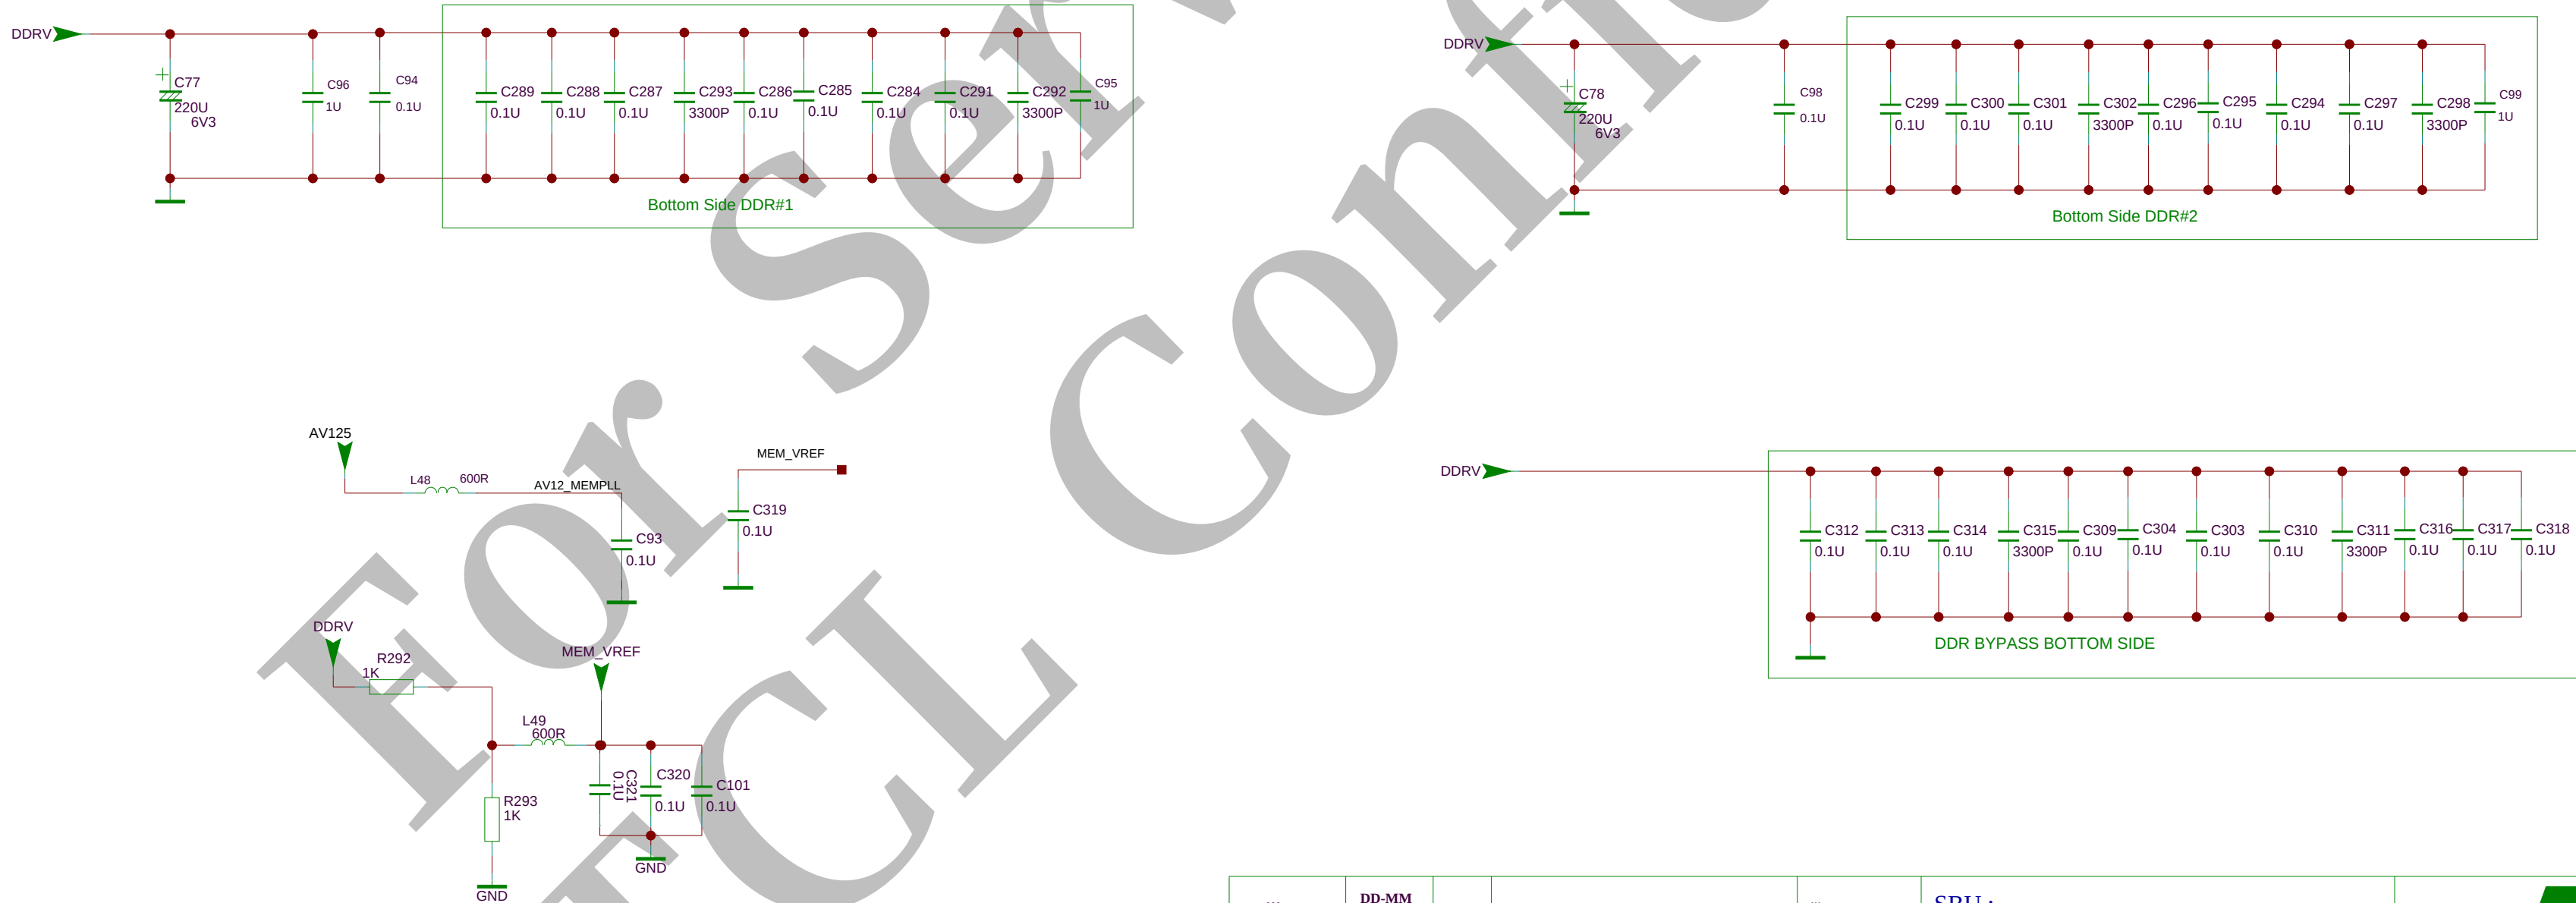


THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNLESS PERMITTED IN WRITING

THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNLESS PERMITTED IN WRITING

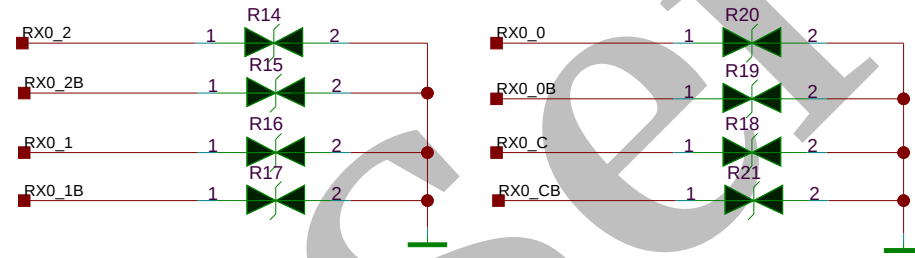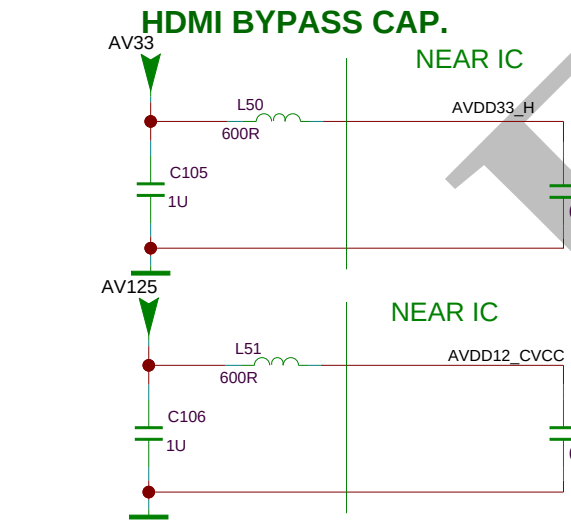

HDMI port 0(side)

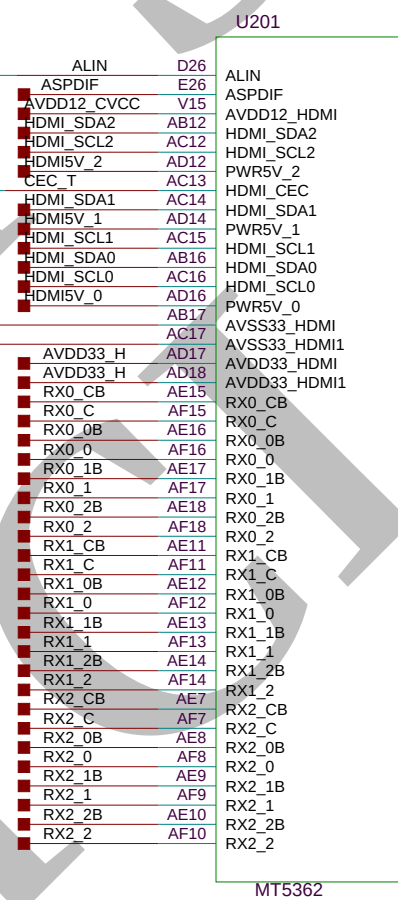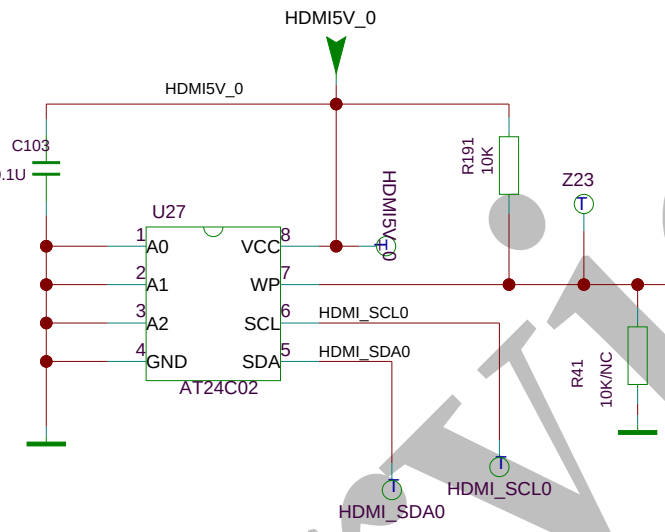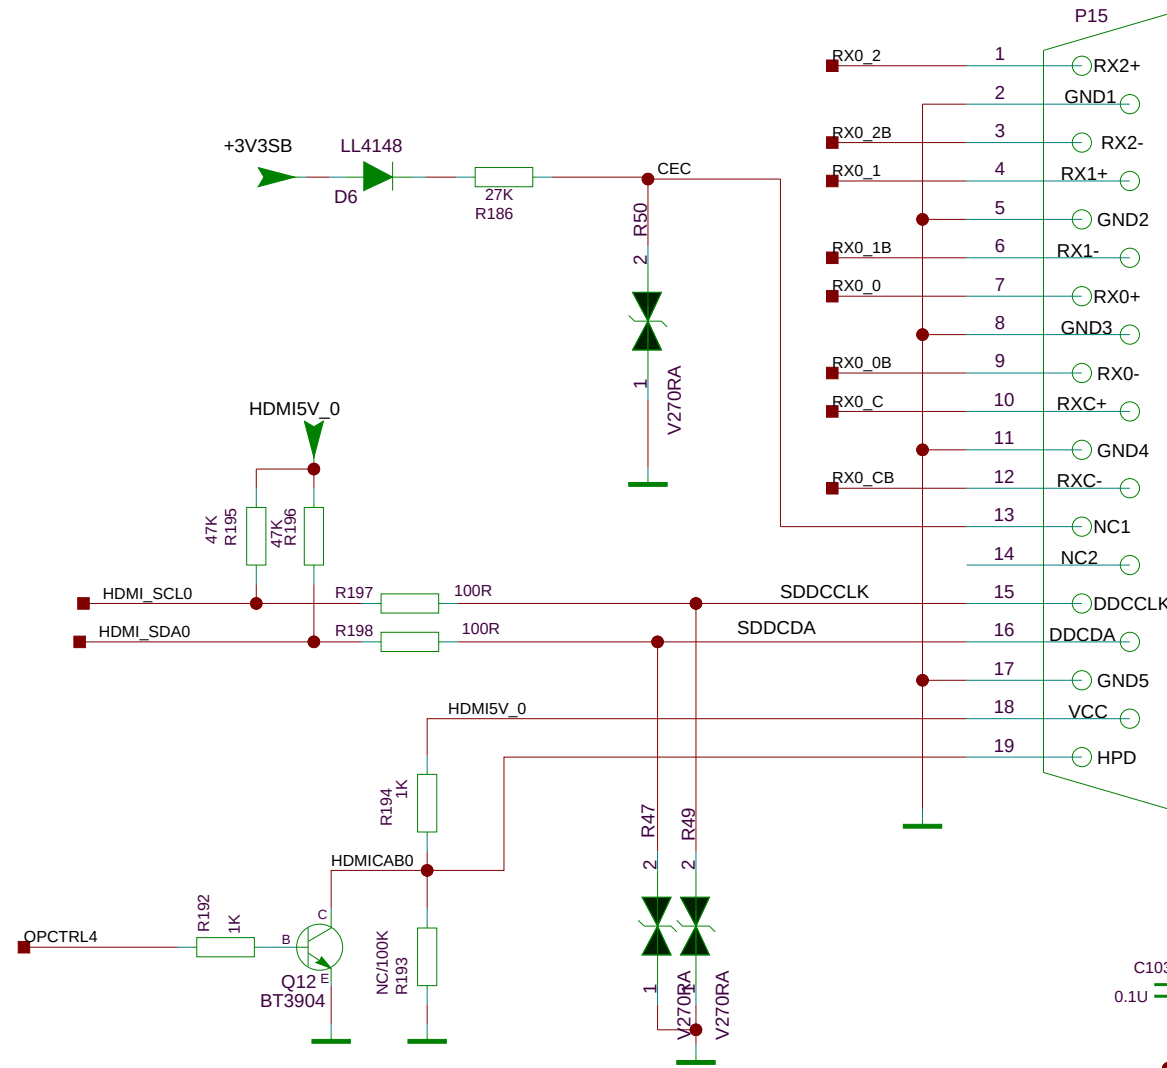


...	DD-MM	...	...	...	SBU :
...	DD-MM	...	...	...	TCLNO:
...	DD-MM	...	...	...	
...	DD-MM	...	...	...	DESIGNATION
Index-Lab	DATE	NAME	DESCRIPTION	Last modif	

Last saved : 5-5-2008_15:52

TTE


TCL Thomson Electronics Ltd.
B Building, TCL Tower, Nanhai Road
Nanshan District, Shenzhen, Guangdong
Tel +86-755-3331xxxx Fax +86-755-3331xxxx

DRAWN	CHECKED	PAGE:
ON: DD-MM-YY	BY:	OF :

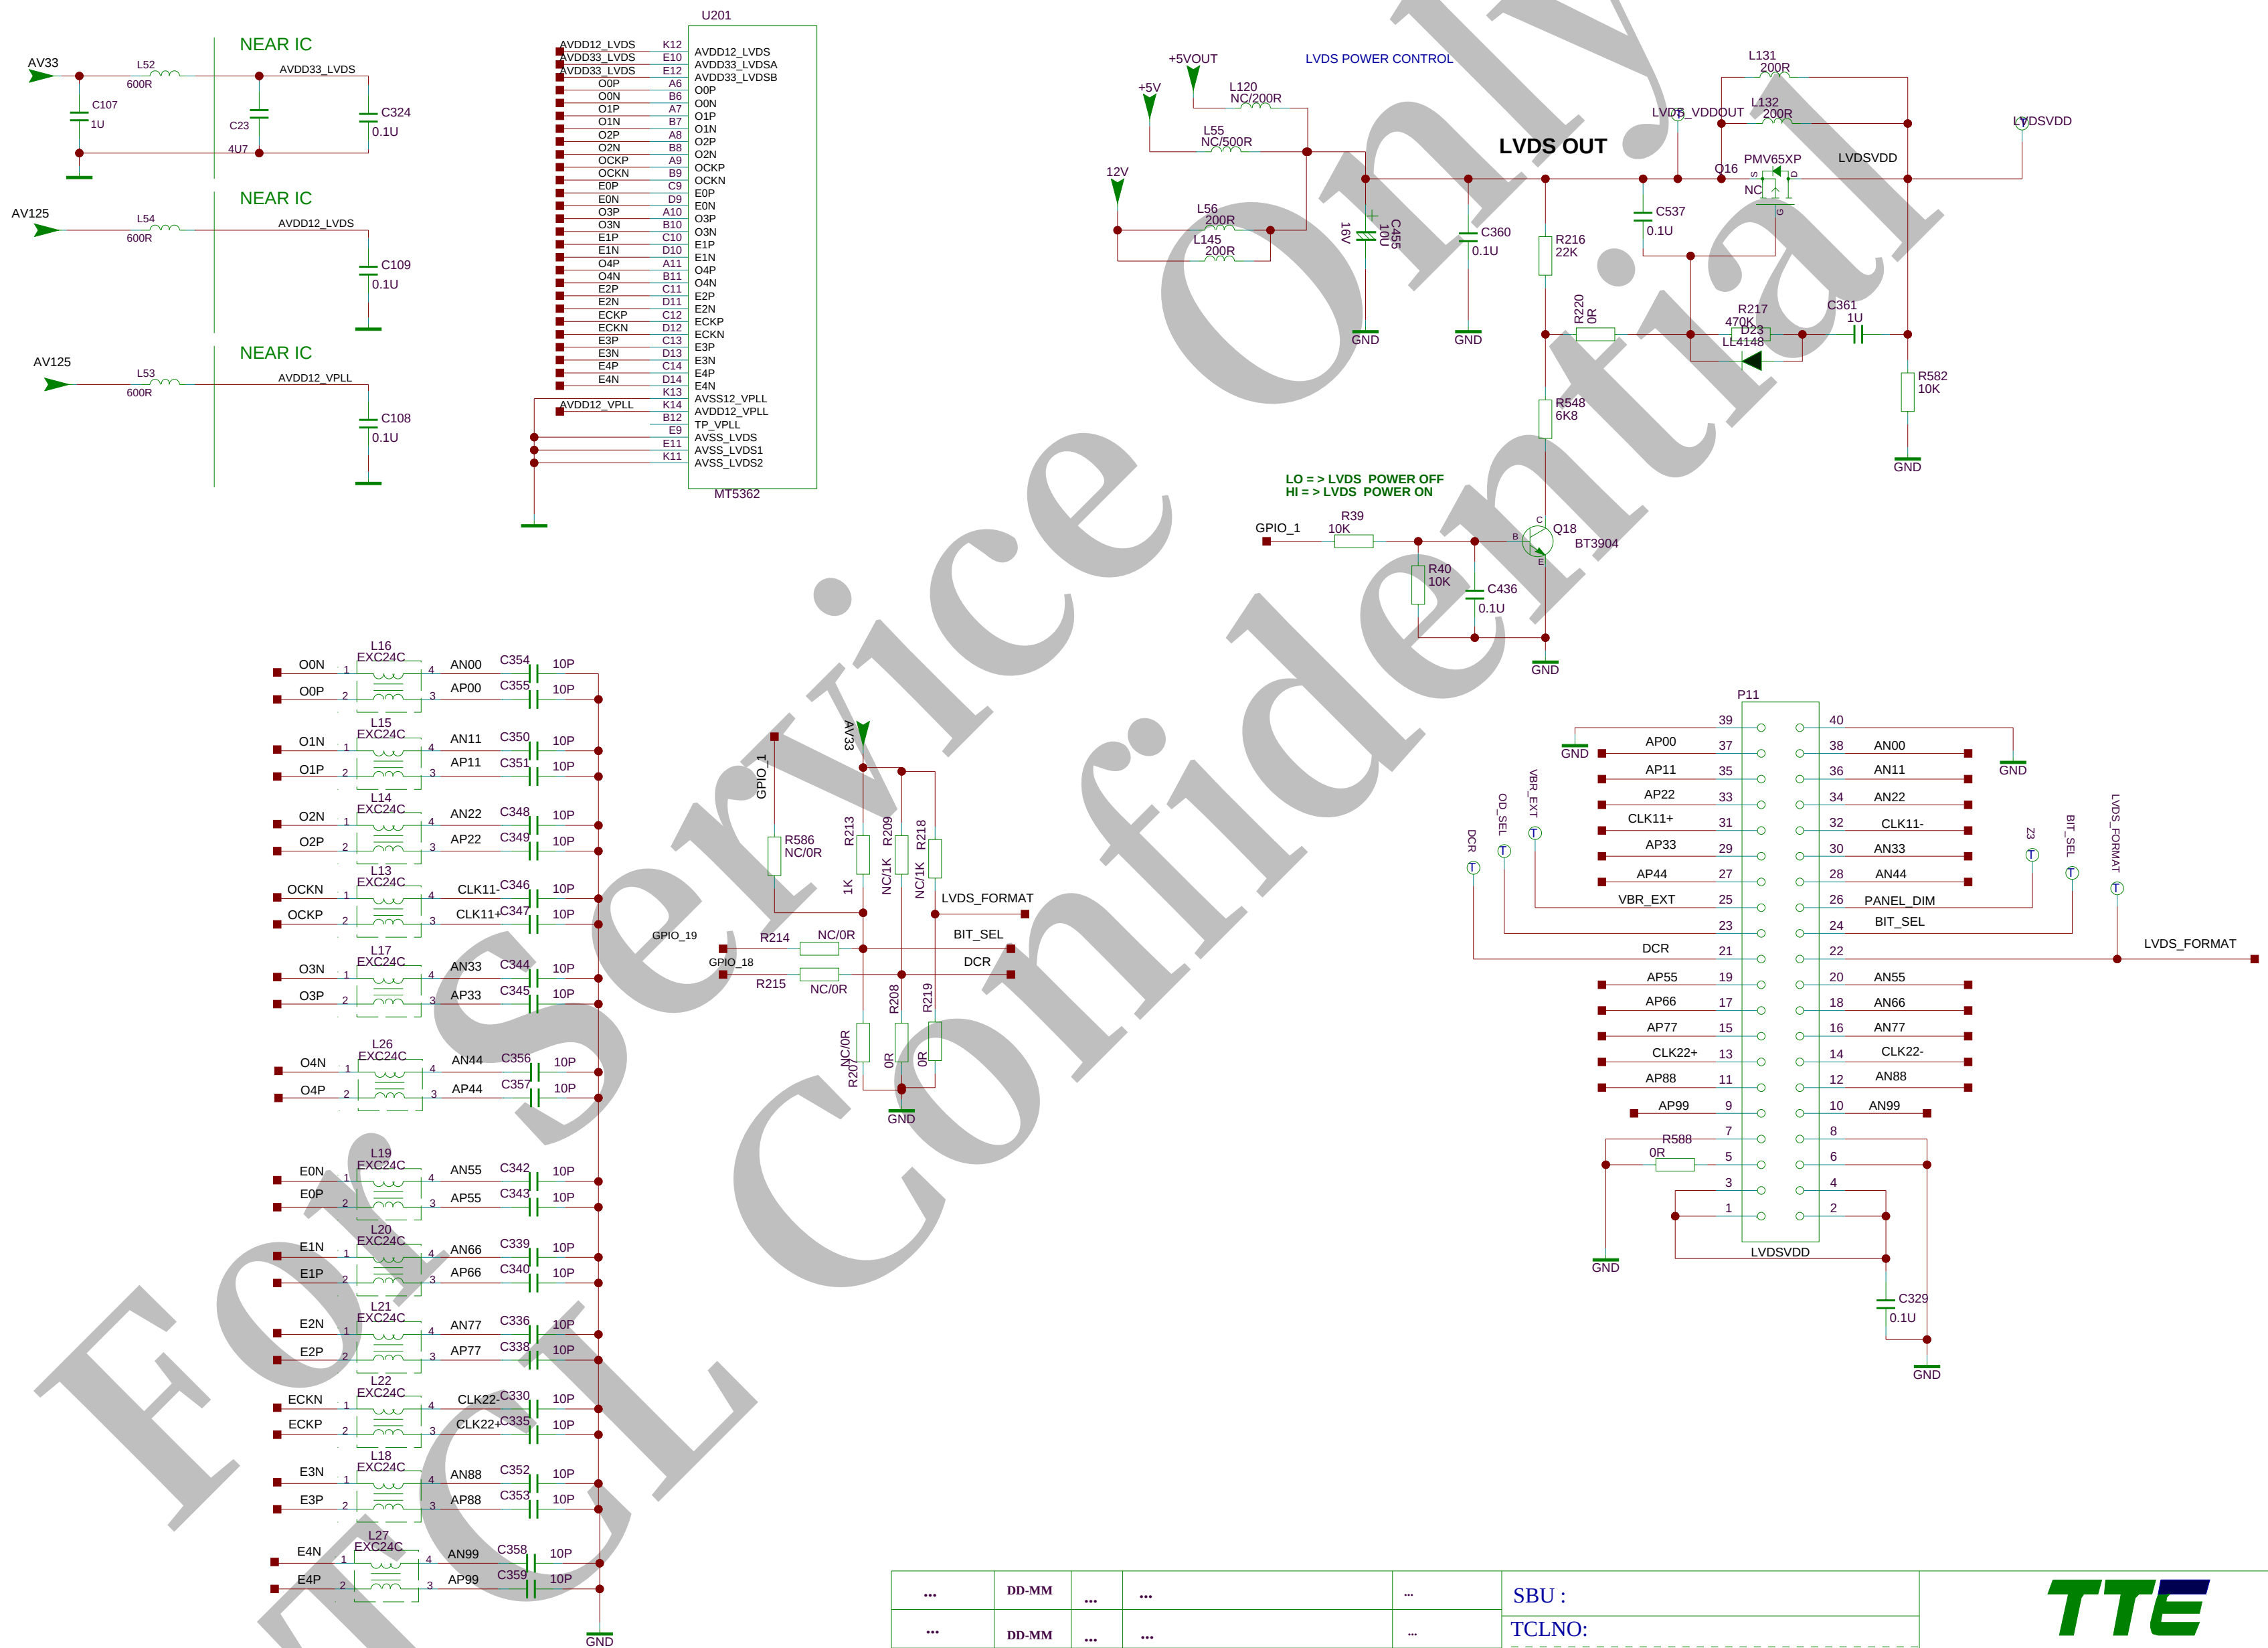





...	DD-MM	...	...	...	SBU :	TTE TCL Thomson Electronics Ltd. B Building, TCL Tower, Nanhai Road Nanshan District, Shenzhen, Guangdong Tel +86-755-3331xxxx Fax +86-755-3331xxxx			
...	DD-MM	...	...	...	TCLNO:				
...	DD-MM	...	...	...					
...	DD-MM	...	...	By Ada,Du	DESIGNATION				
Index-Lab	DATE	NAME	DESCRIPTION	Last modif		DRAWN	CHECKED	PAGE:	
Last saved : 5-5-2008_15:52						ON: DD-MM-YY	BY:	OF :	




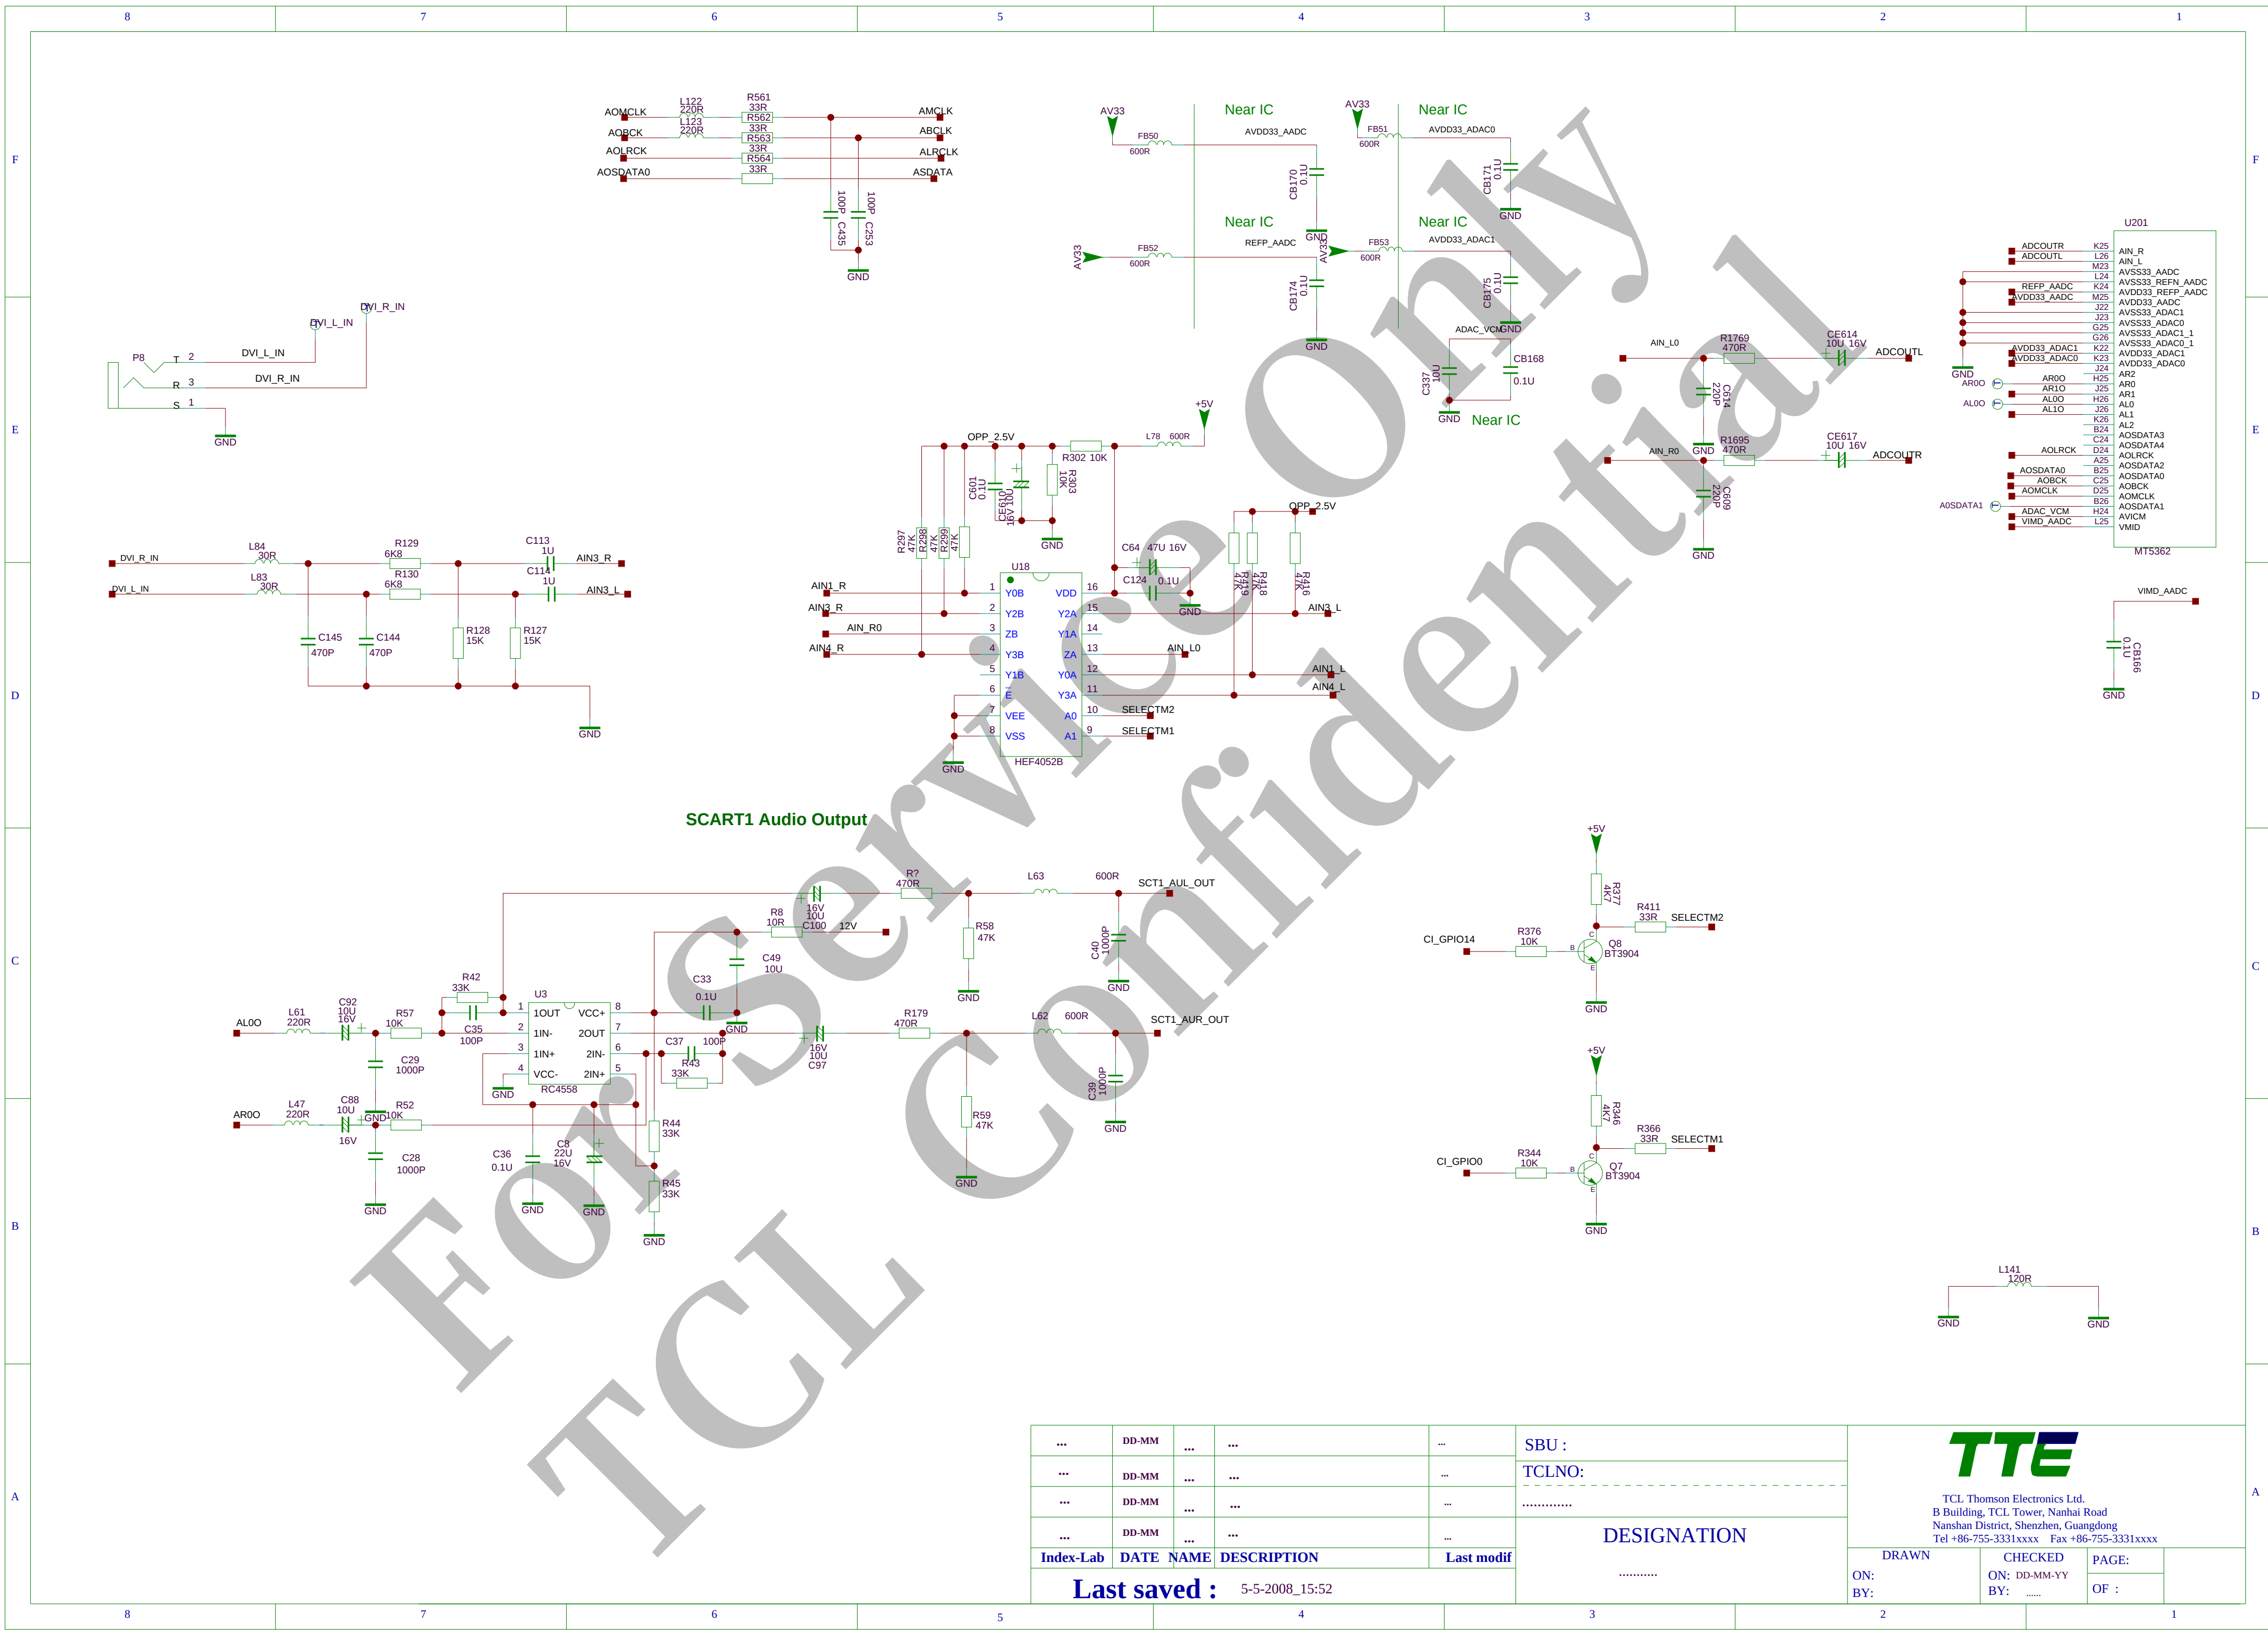


THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNLES S PERMITTED IN WRITING


DIGITAL AMP.

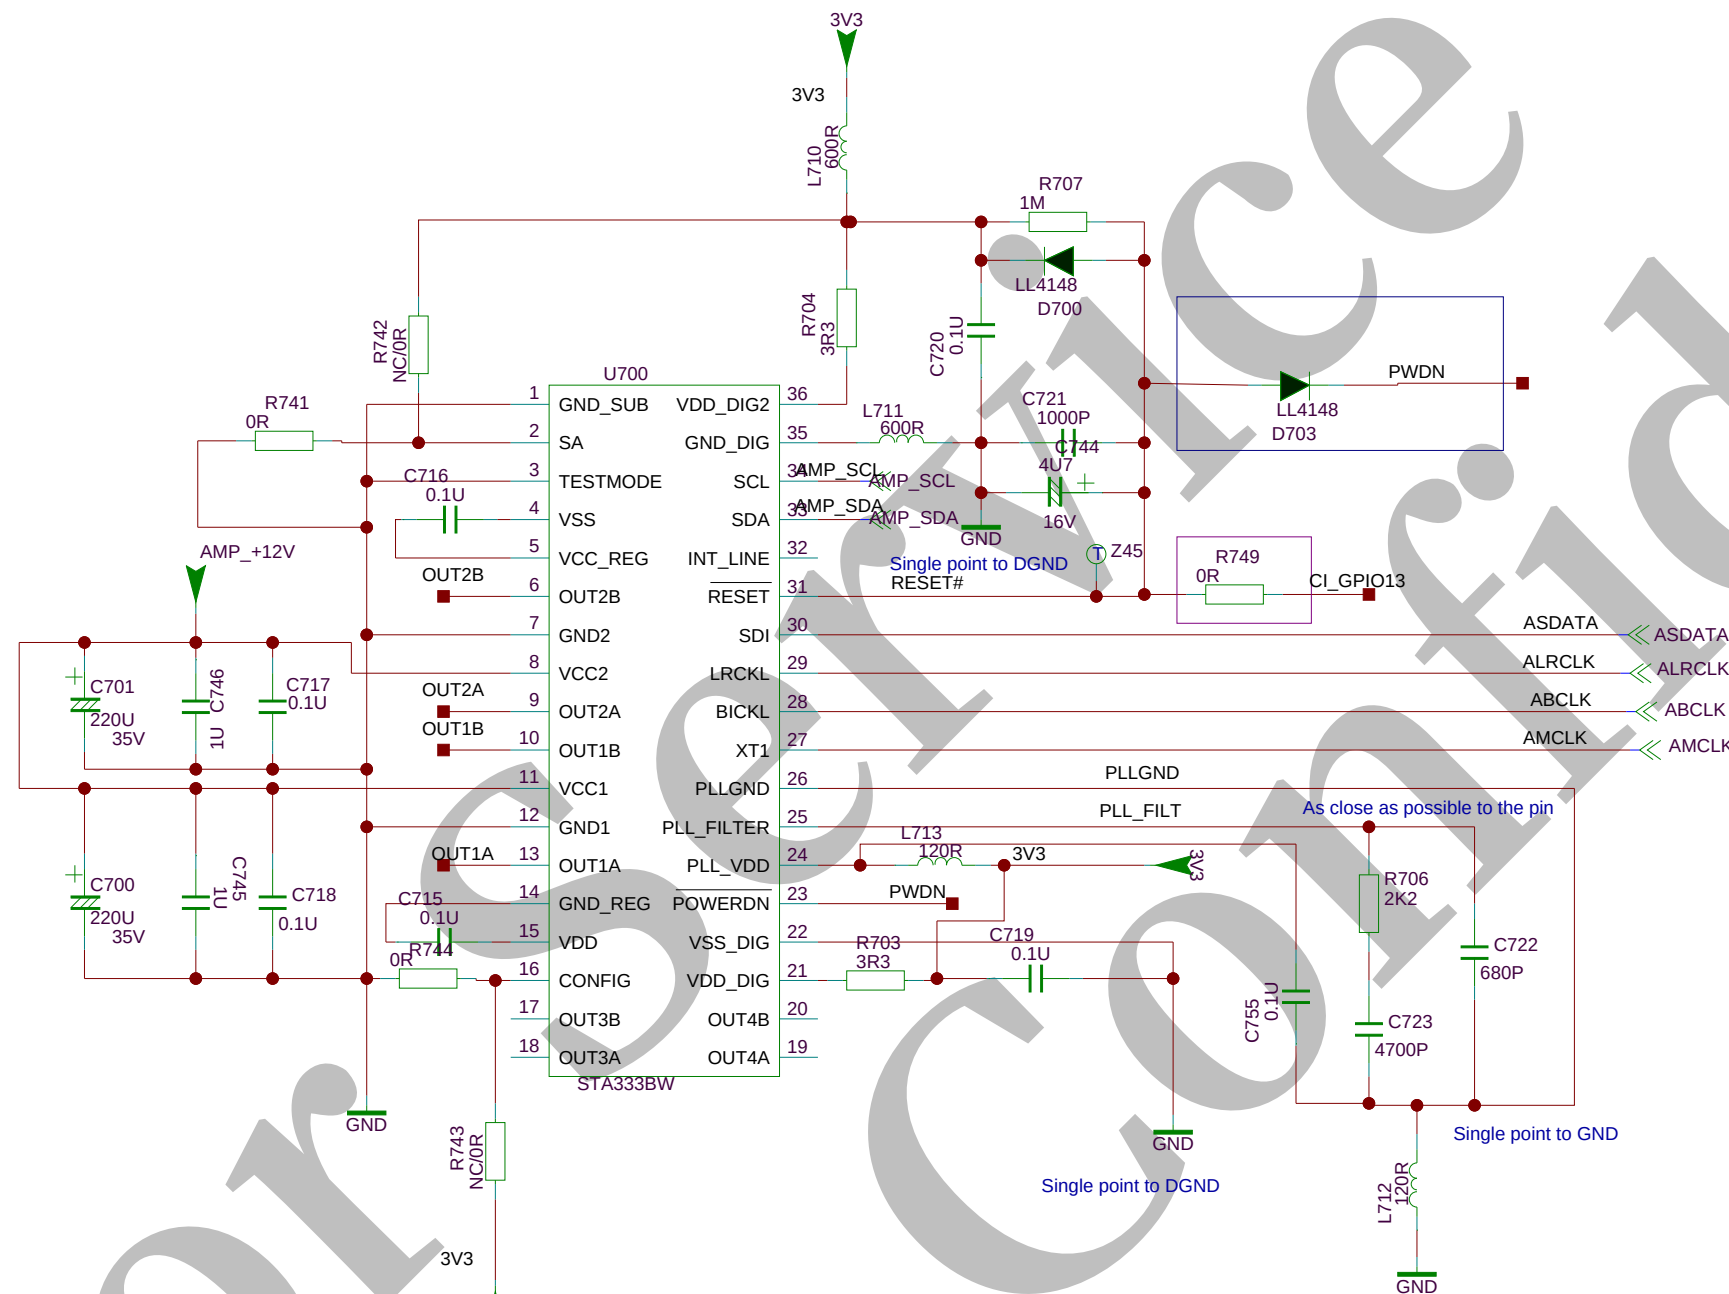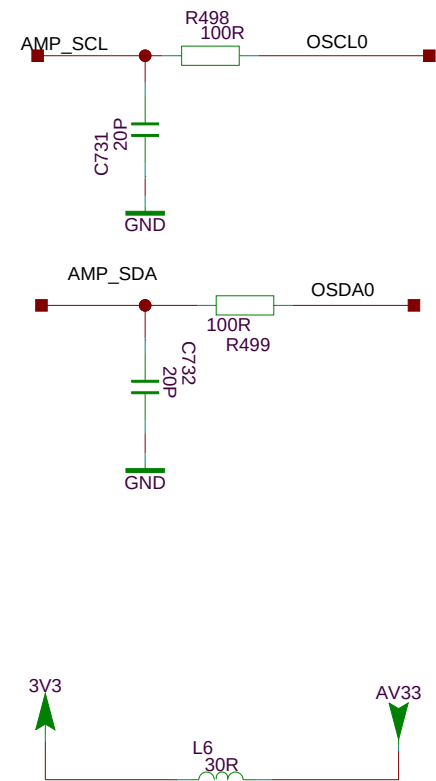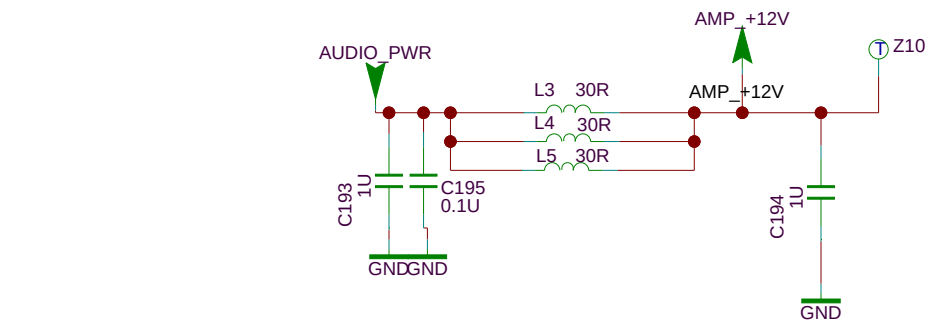


Connect AMP gnd with tuner gnd

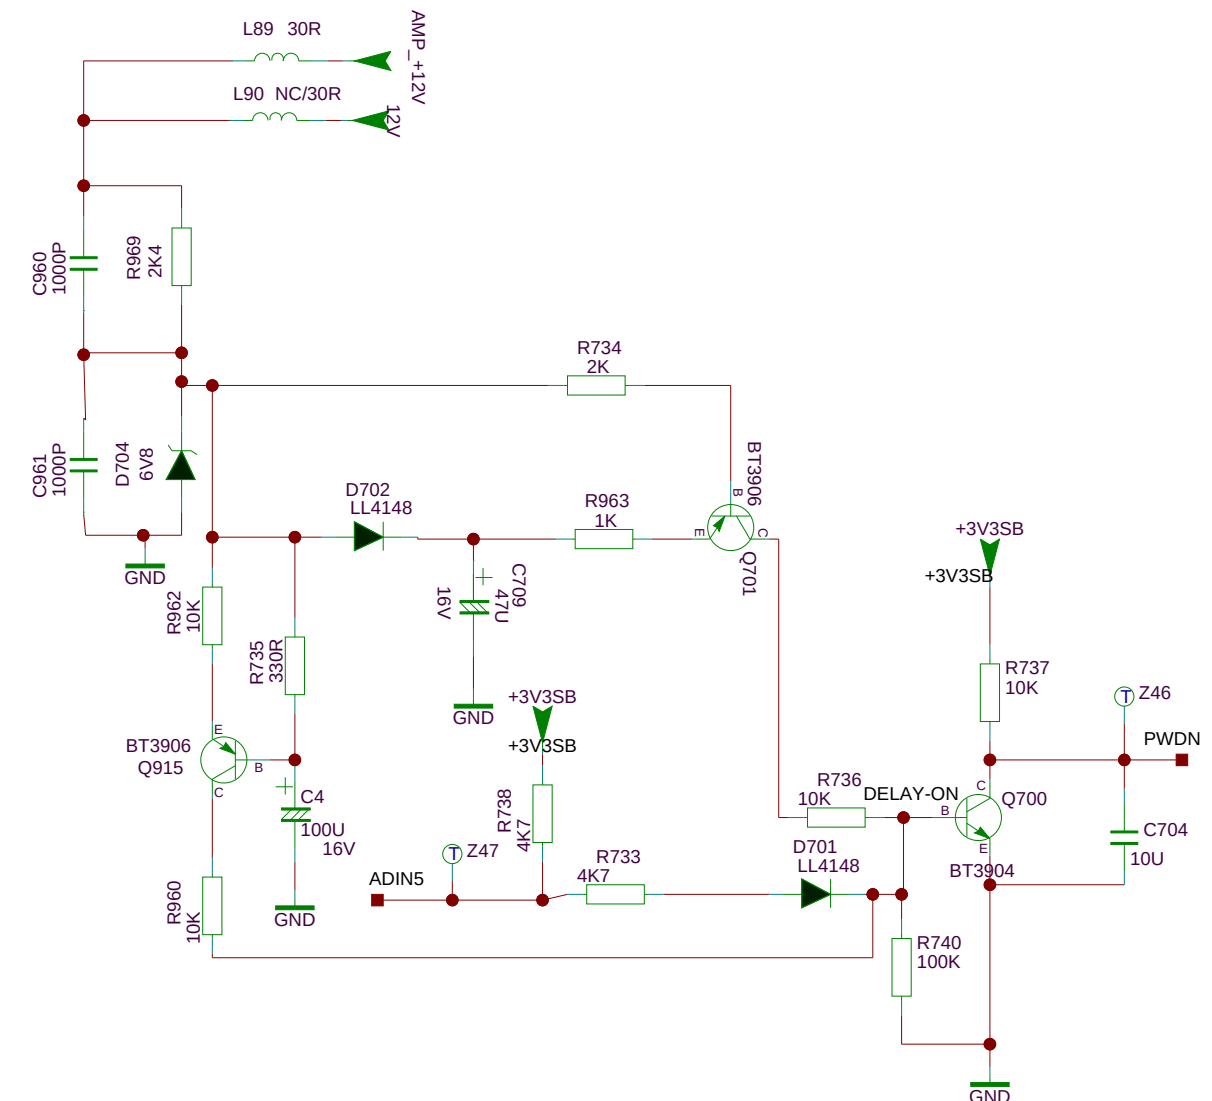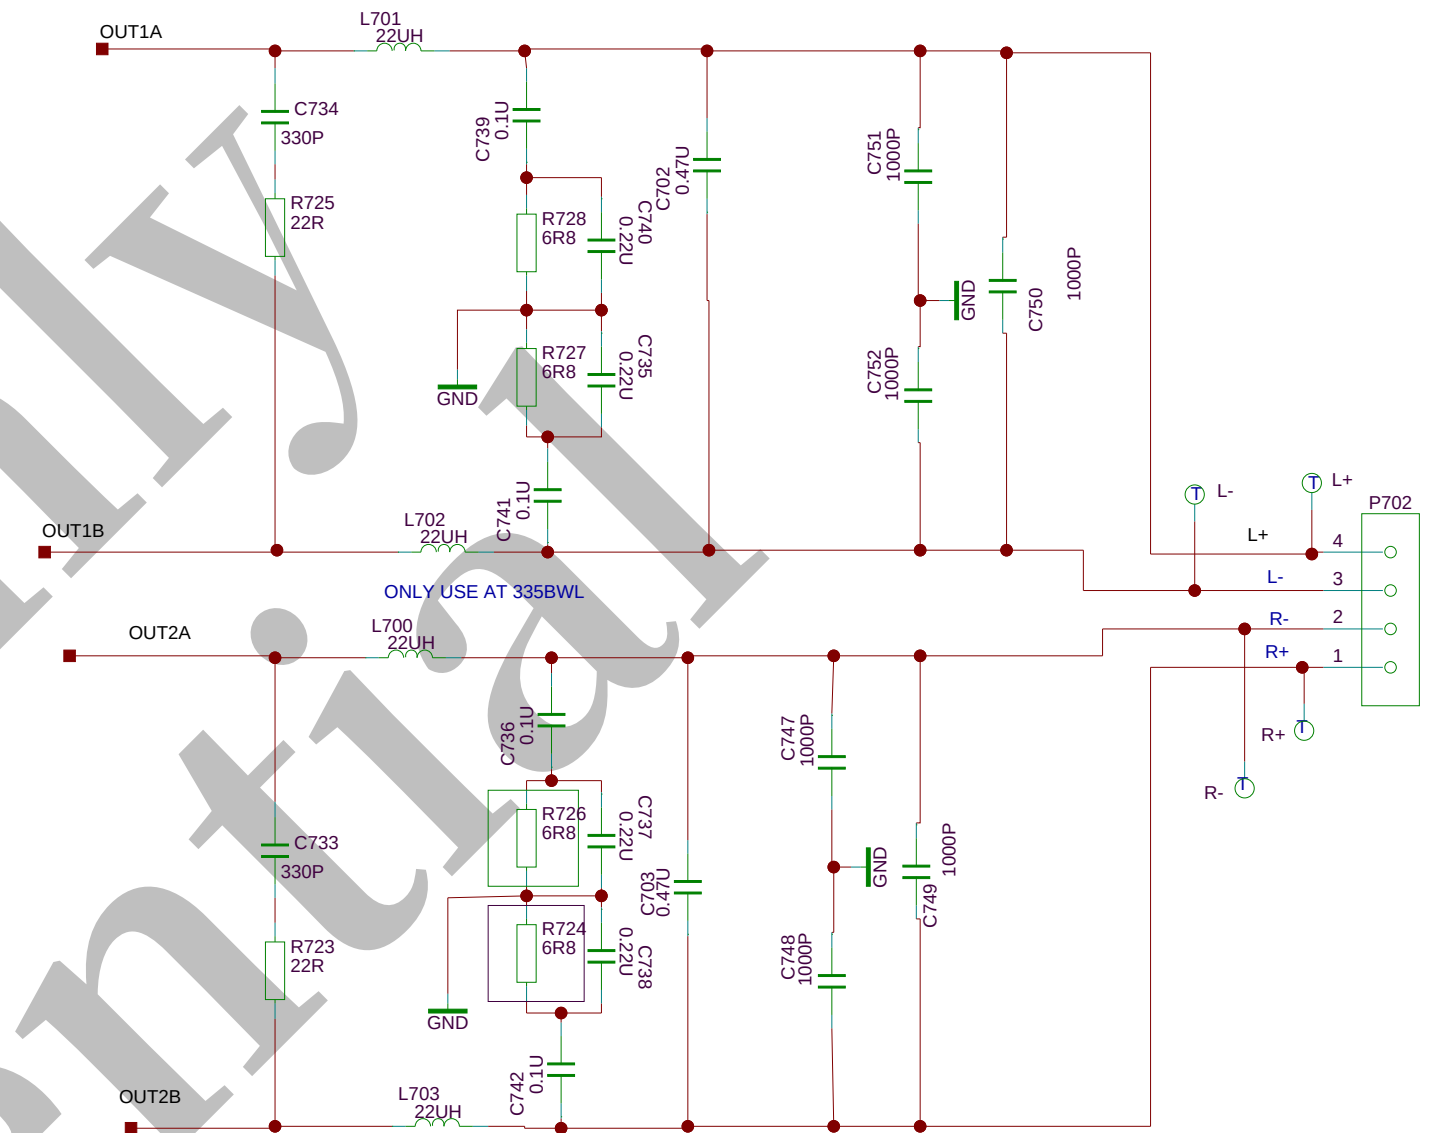


...	DD-MM	...	...	...	SBU :	TTE TCL Thomson Electronics Ltd. B Building, TCL Tower, Nanhai Road Nanshan District, Shenzhen, Guangdong Tel +86-755-3331xxxx Fax +86-755-3331xxxx
...	DD-MM	...	...	...	TCLNO:	
...	DD-MM	...	...	...		
...	DD-MM	...	...	...	DESIGNATION	
Index-Lab	DATE	NAME	DESCRIPTION	Last modif		DRAWN ON: DD-MM-YY BY:
Last saved : 5-5-2008_15:52						CHECKED ON: DD-MM-YY BY:
						PAGE: OF : 1

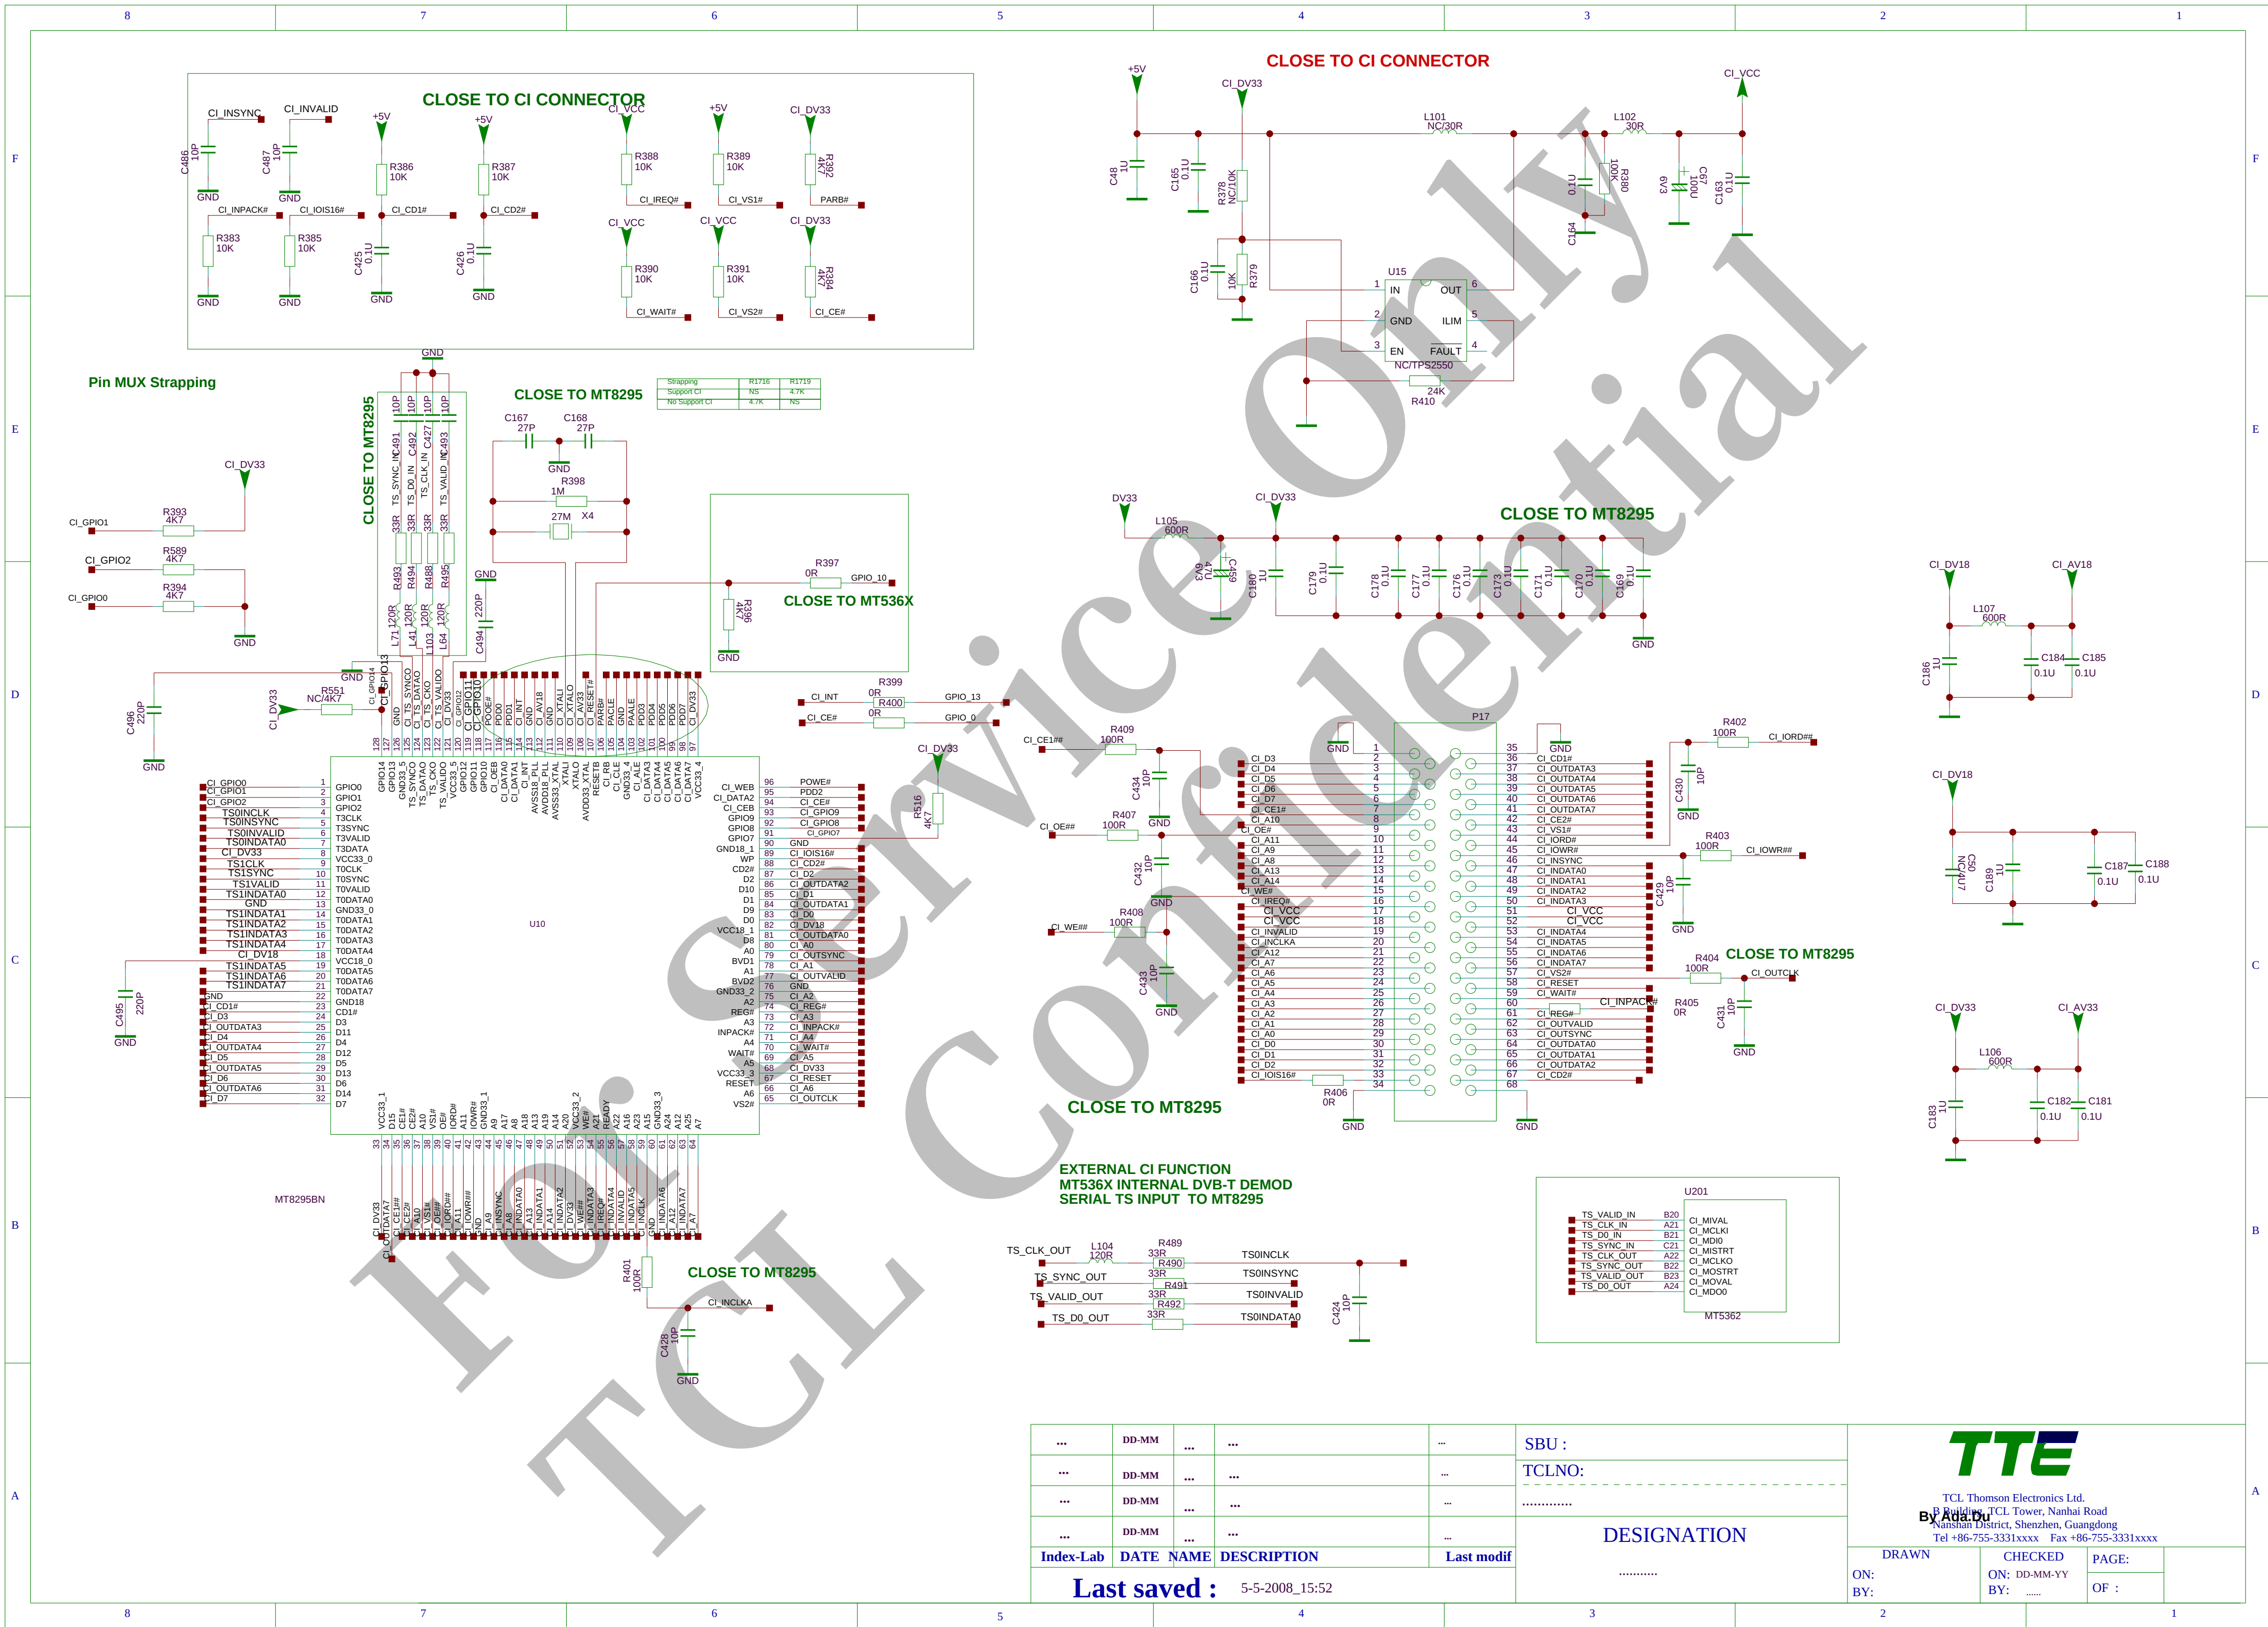

THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNLES S PERMITTED IN WRITING

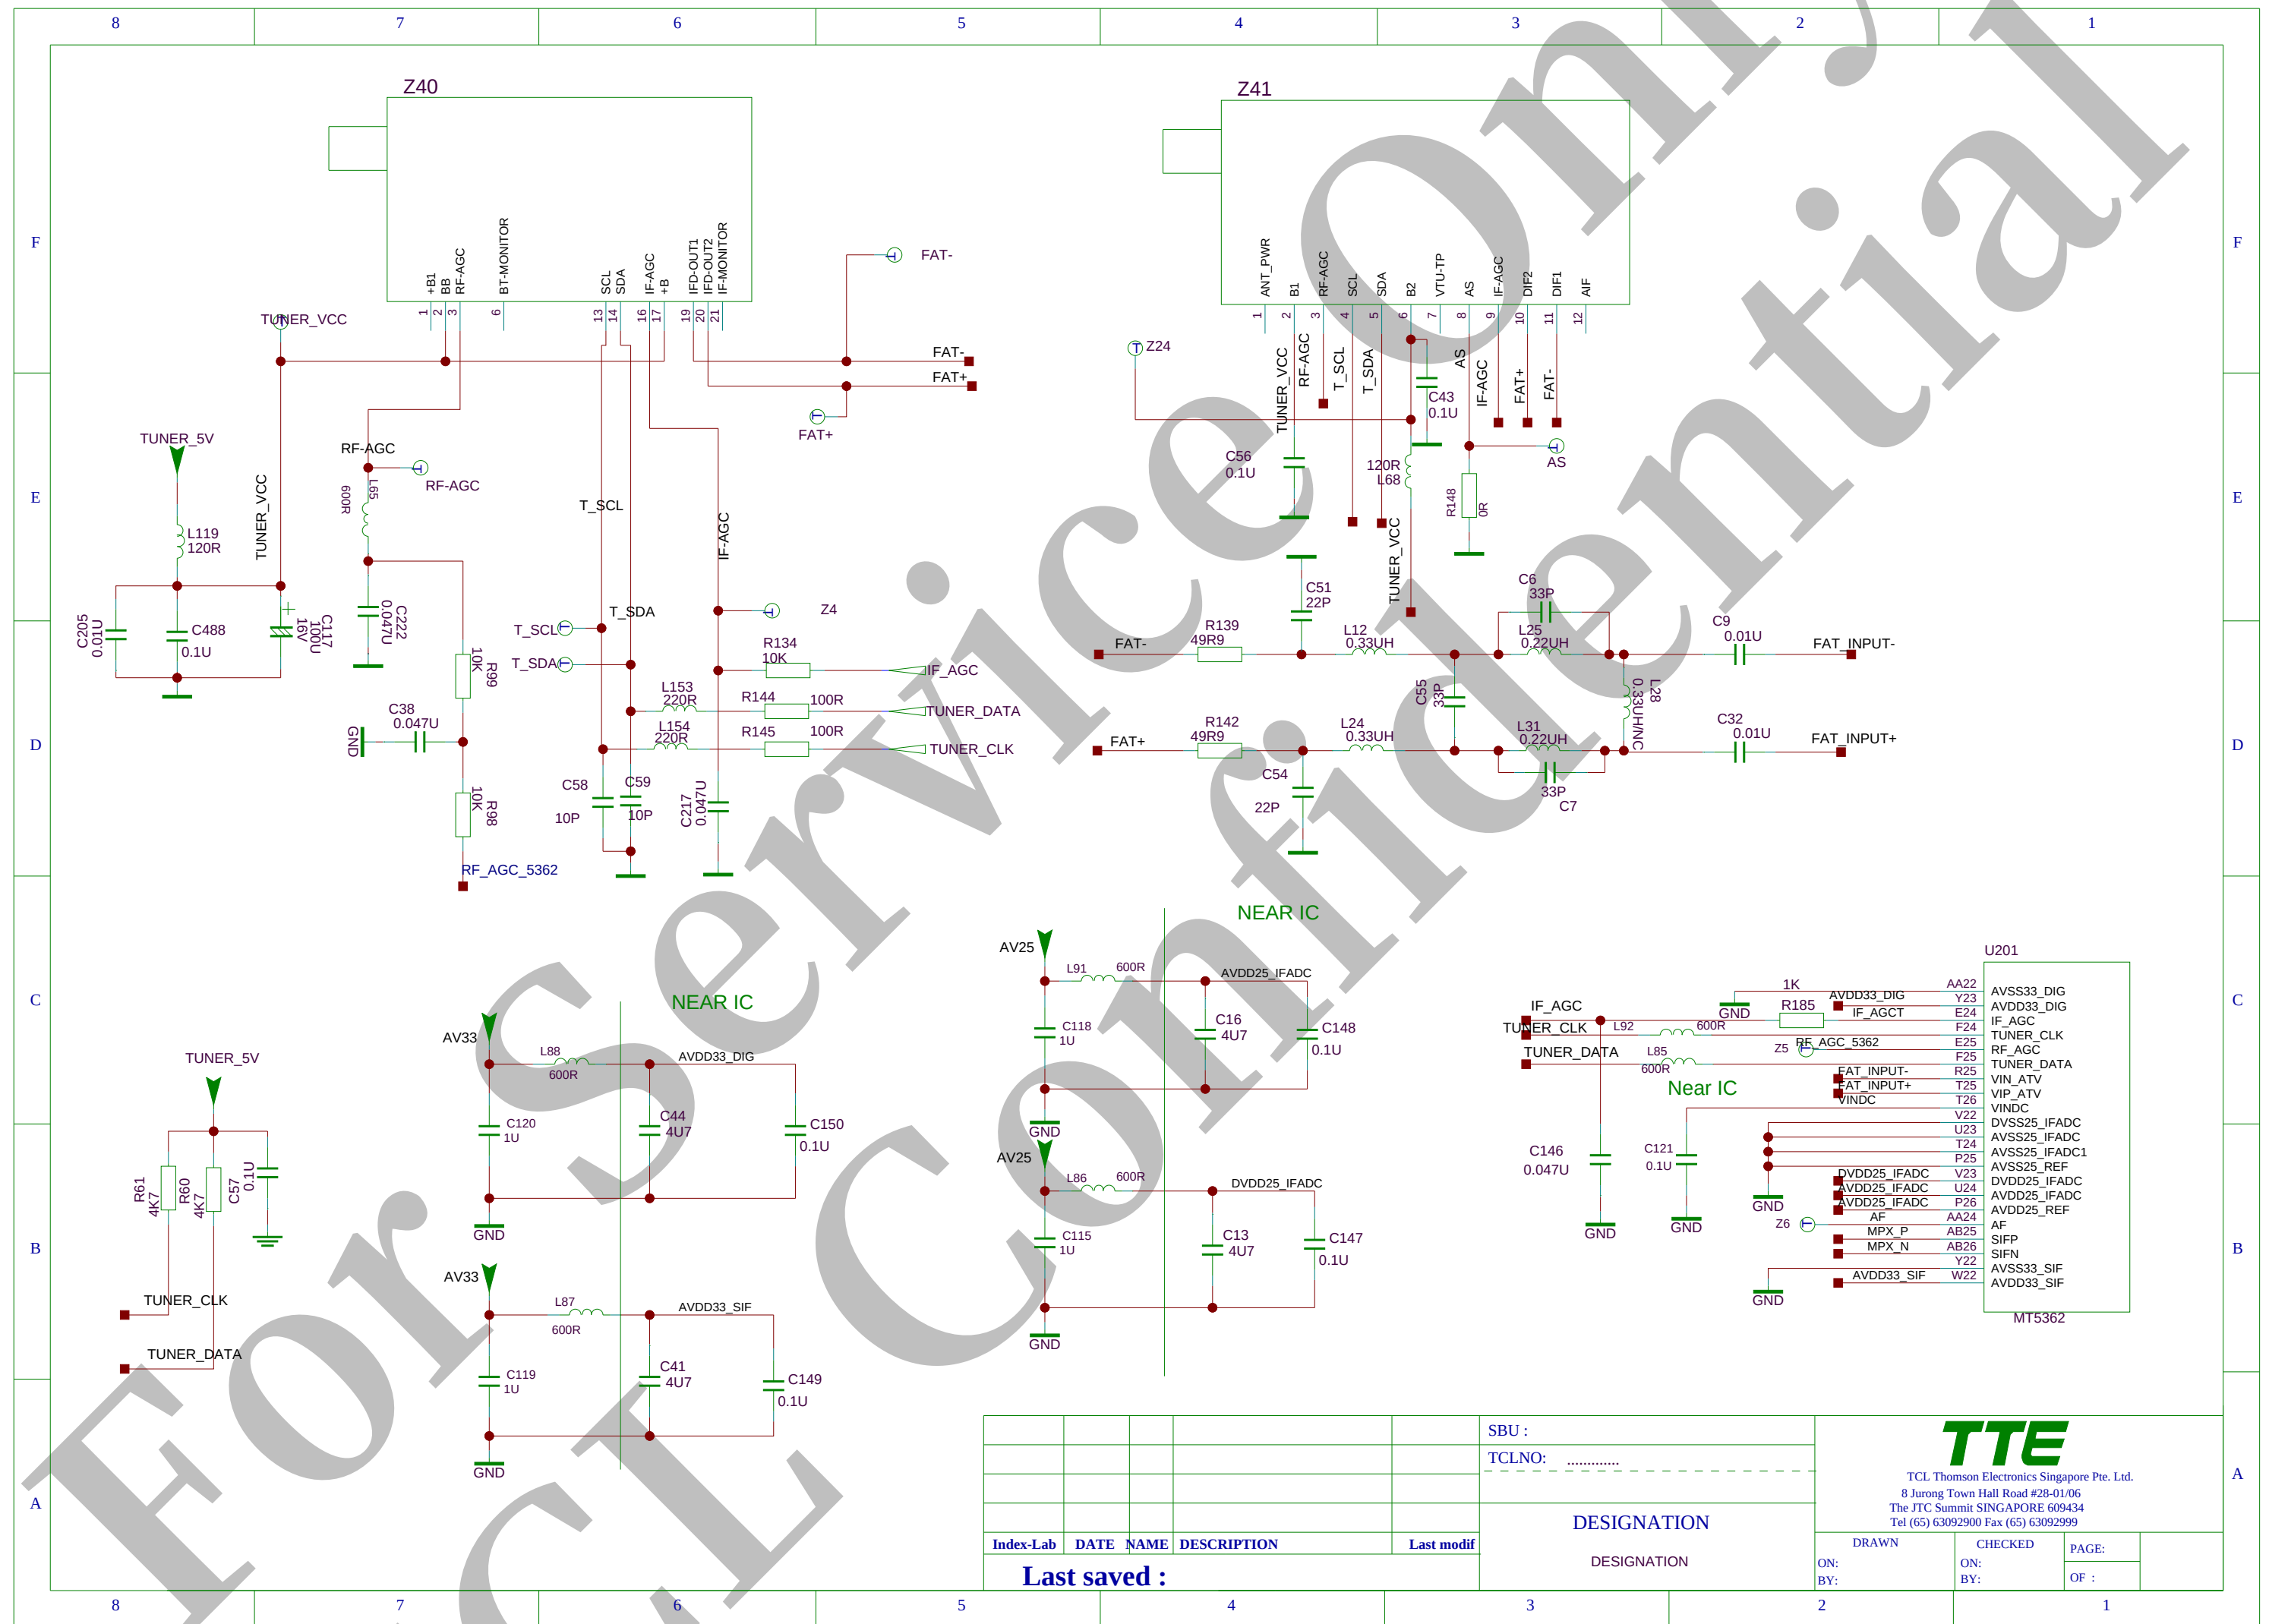




THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNLESS PERMITTED IN WRITING

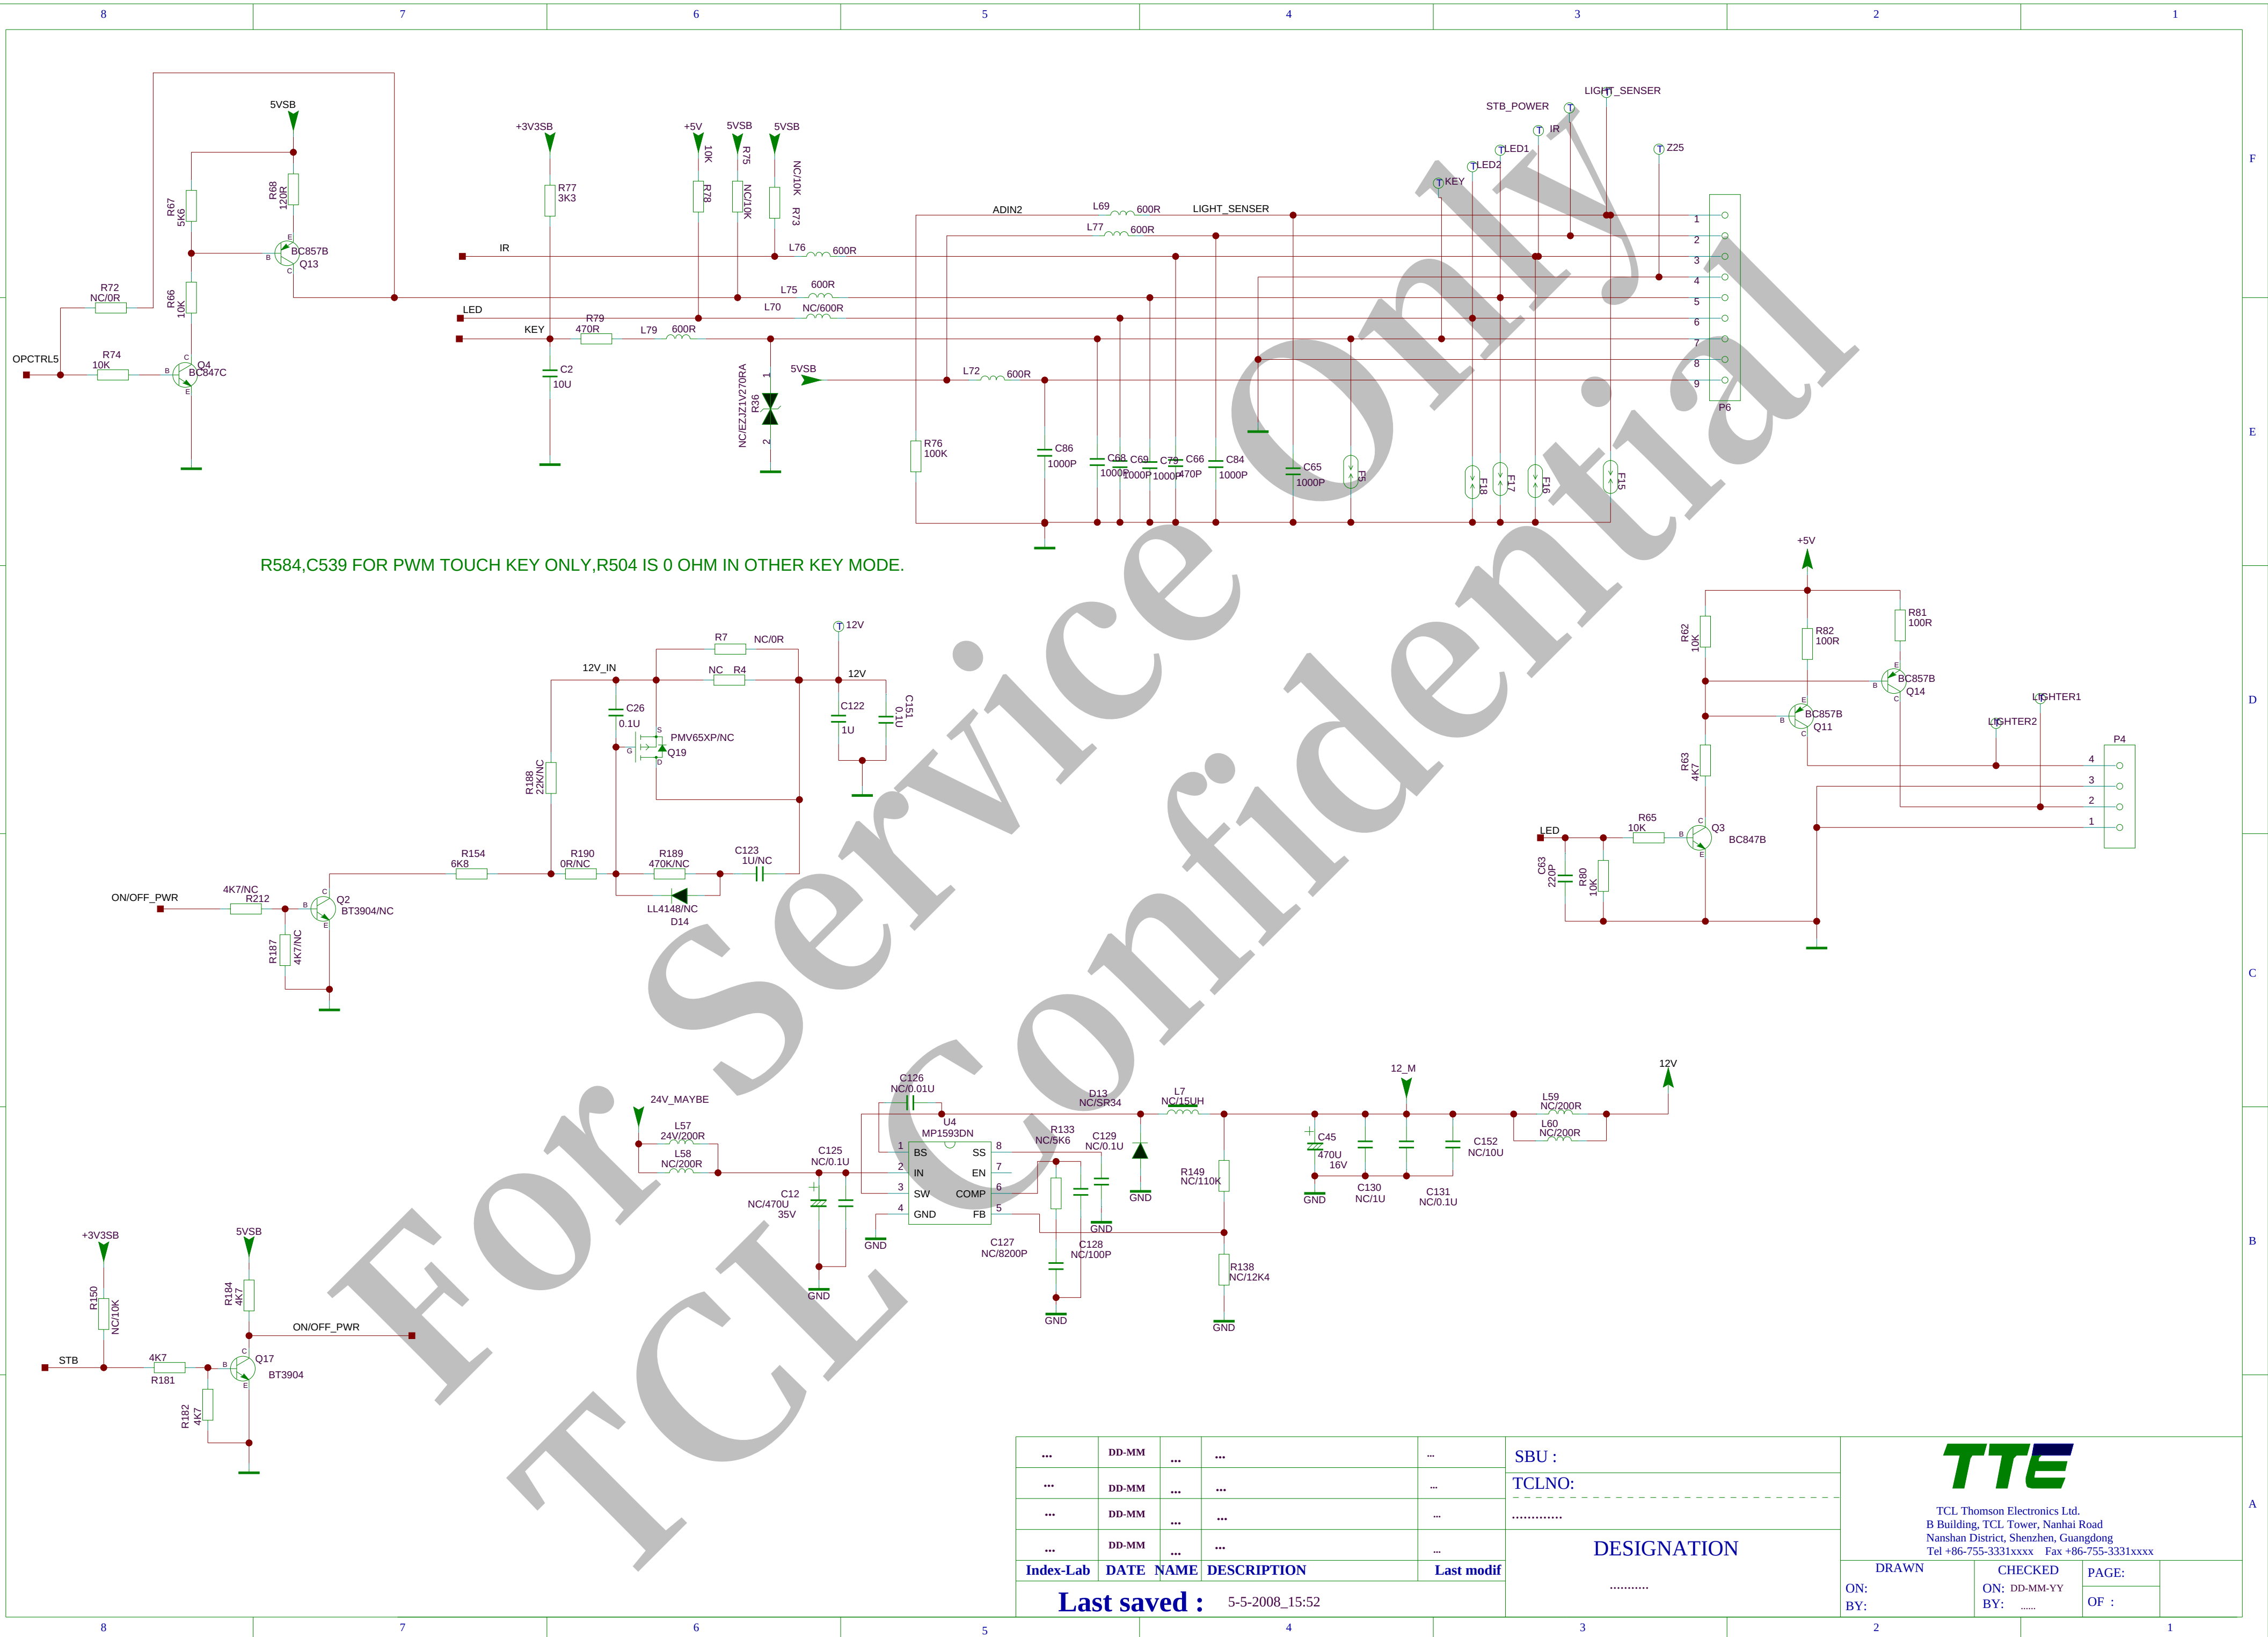

R584,C539 FOR PWM TOUCH KEY ONLY,R504 IS 0 OHM IN OTHER KEY MODE.

...	DD-MM	...	...	...	SBU :	TTE TCL Thomson Electronics Ltd. B Building, TCL Tower, Nanhai Road Nanshan District, Shenzhen, Guangdong Tel +86-755-3331xxxx Fax +86-755-3331xxxx		
...	DD-MM	...	...	...	TCLNO:			
...	DD-MM	...	...	...				
...	DD-MM	...	...	...	DESIGNATION			
Index-Lab	DATE	NAME	DESCRIPTION	Last modif		DRAWN	CHECKED	PAGE:
Last saved : 5-5-2008_15:52						ON: BY:	ON: DD-MM-YY BY:	OF :



THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNLESS PERMITTED IN WRITING

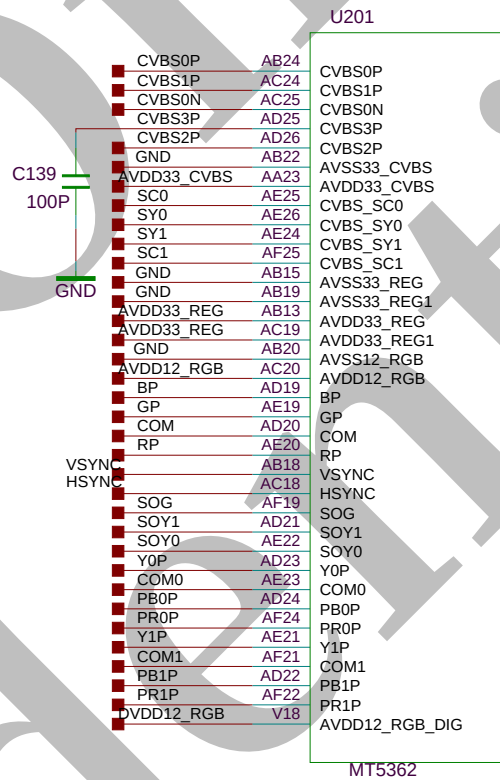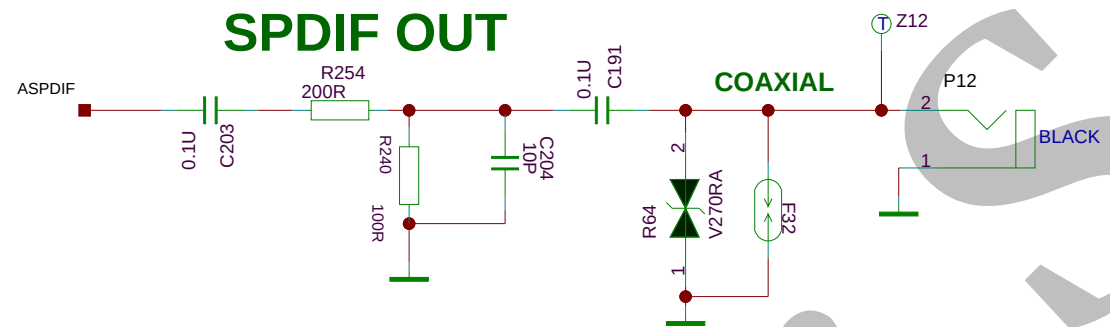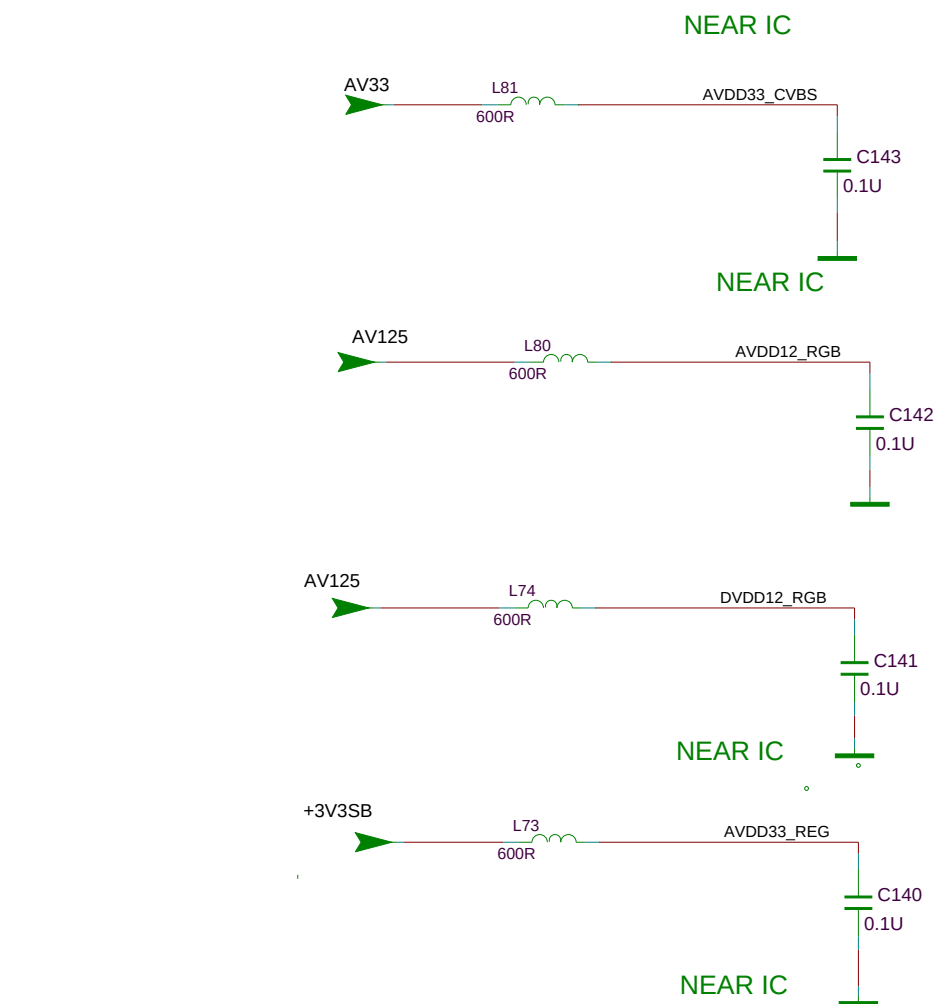

...	DD-MM	...	...	...	SBU :
...	DD-MM	...	...	...	TCLNO:
...	DD-MM	...	...	...	
...	DD-MM	...	...	...	DESIGNATION
Index-Lab	DATE	NAME	DESCRIPTION	Last modif	
Last saved : 5-5-2008_15:52					

TTE		
TCL Thomson Electronics Ltd. B Building, TCL Tower, Nanhai Road Nanshan District, Shenzhen, Guangdong Tel +86-755-3331xxxx Fax +86-755-3331xxxx		
DRAWN	CHECKED	PAGE:
ON: DD-MM-YY	ON: DD-MM-YY	OF :
BY:	BY:	

THIS DRAWING CANNOT BE COMMUNICATED TO UNAUTHORIZED PERSONS COPIED UNIMS S PERMITTED IN WRITING

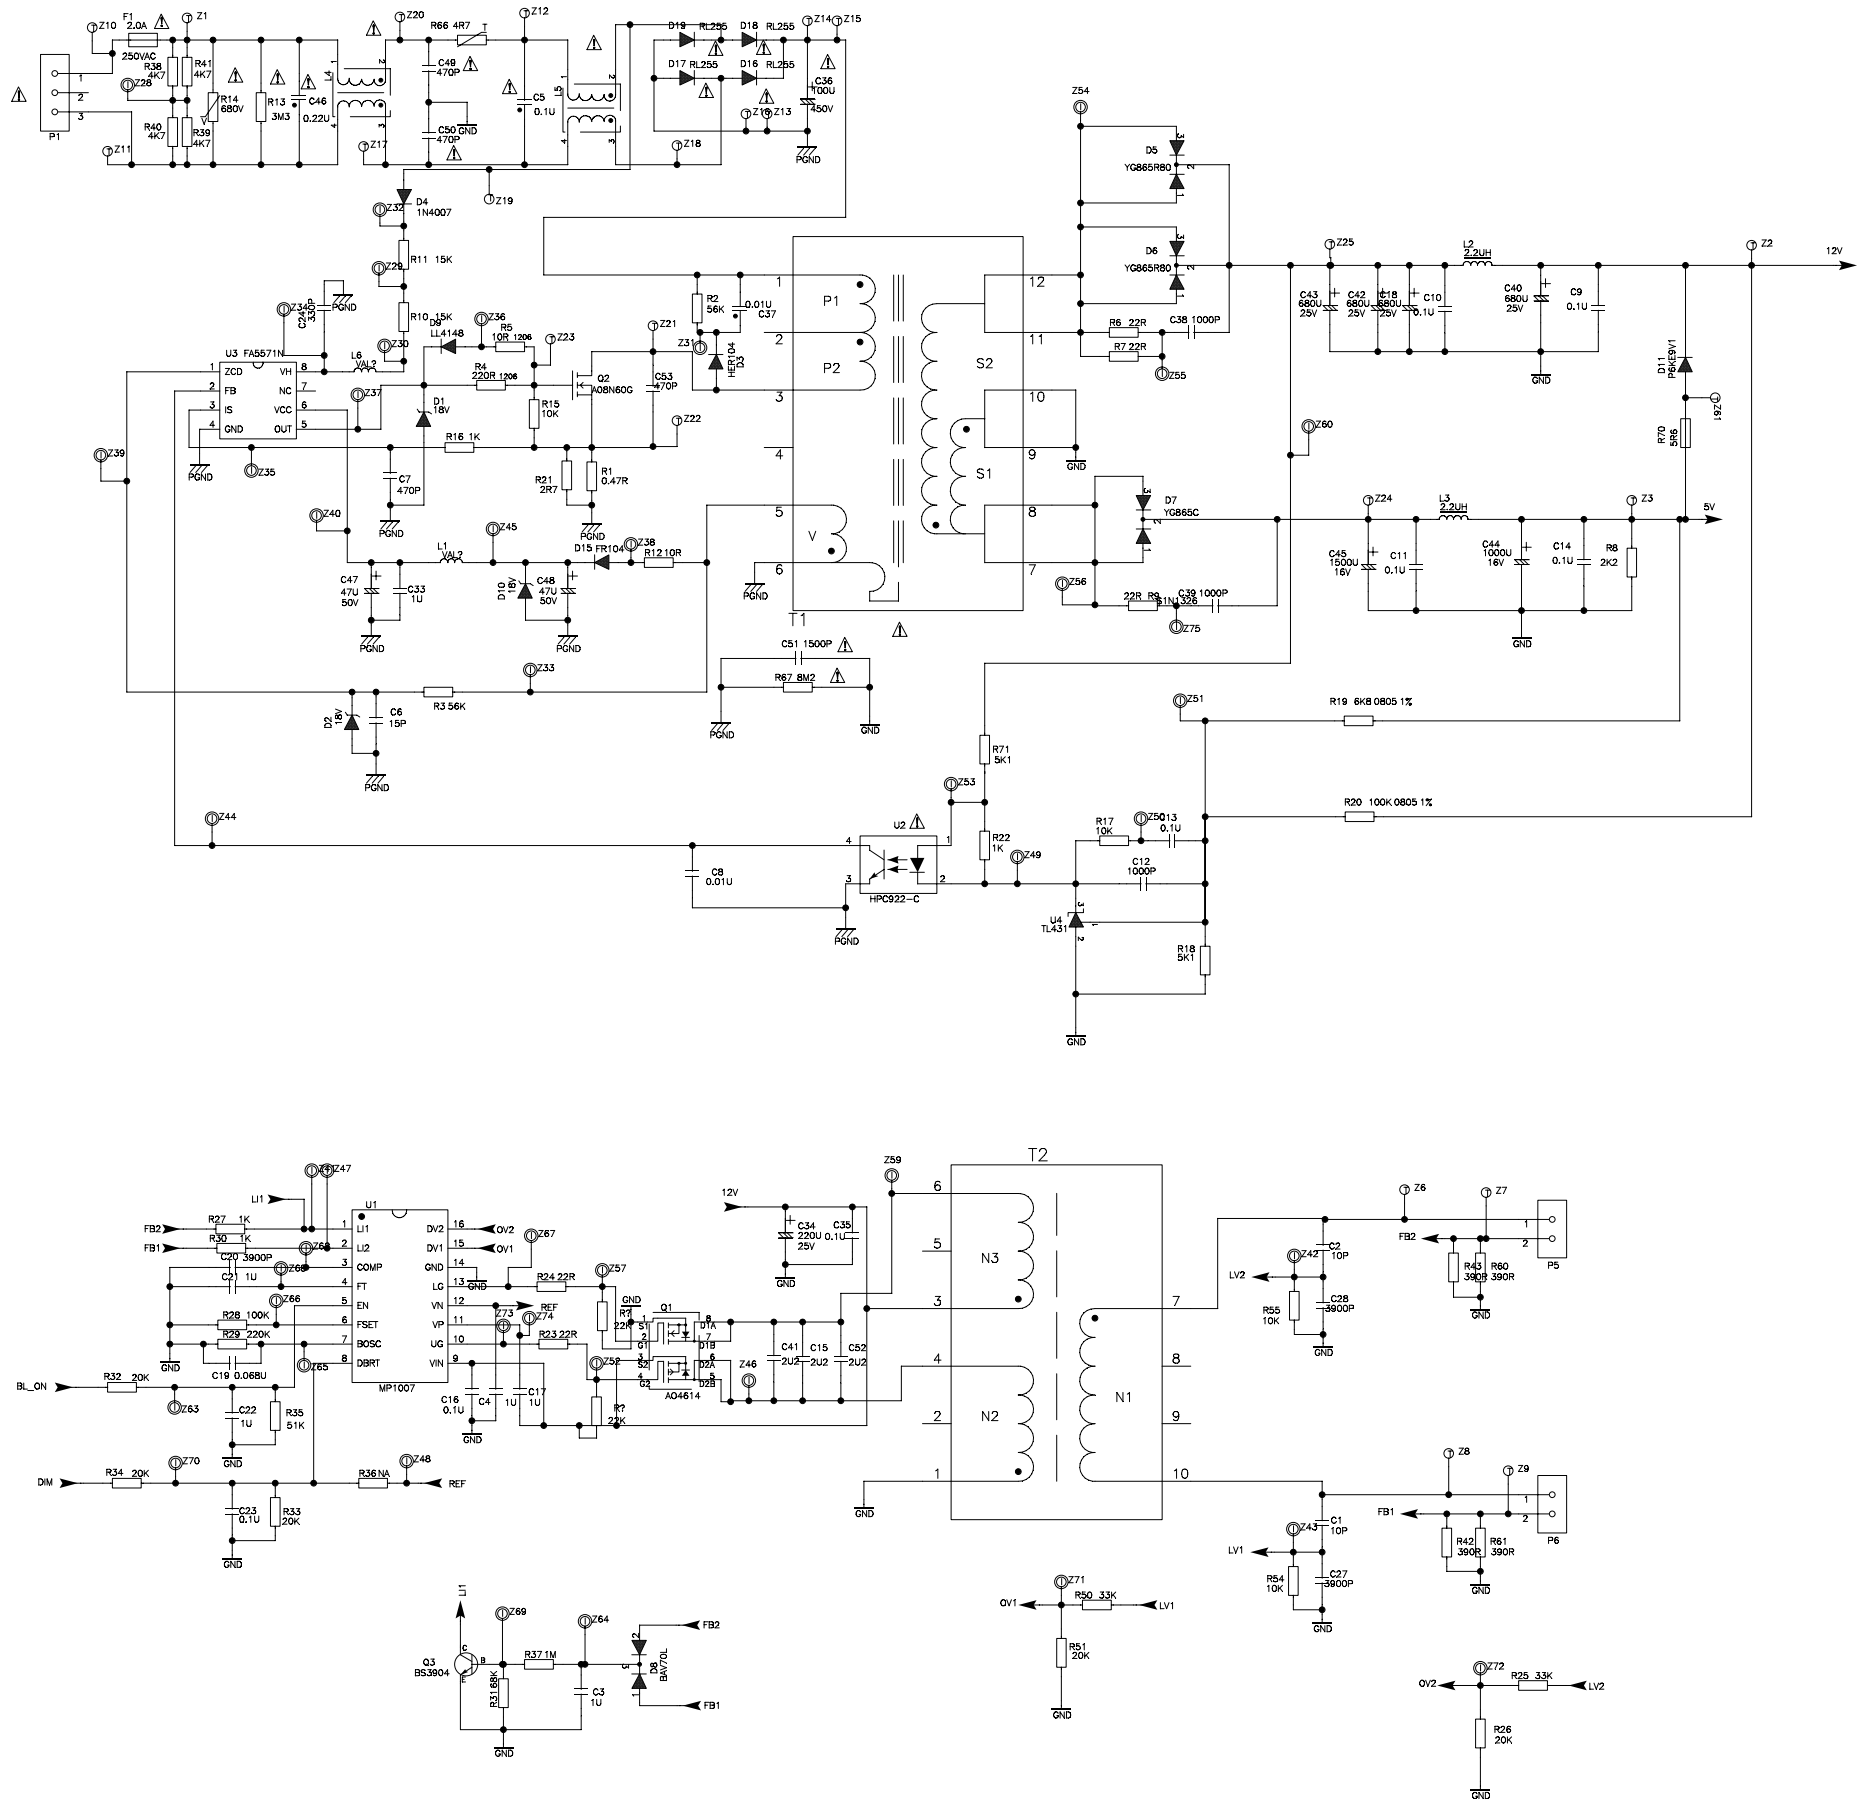



...	DD-MM	...	...	...	SBU :
...	DD-MM	...	...	...	TCLNO:
...	DD-MM	...	...	...	
...	DD-MM	...	...	...	DESIGNATION
Index-Lab	DATE	NAME	DESCRIPTION	Last modif	
Last saved : 5-5-2008_16:29					

TTE


TCL Thomson Electronics Ltd.
B Building, TCL Tower, Nanhai Road
Nanshan District, Shenzhen, Guangdong
Tel +86-755-3331xxxx Fax +86-755-3331xxxx

DRAWN	CHECKED	PAGE:	
ON:	ON:DD-MM-YY	OF :	
BY:	BY:		

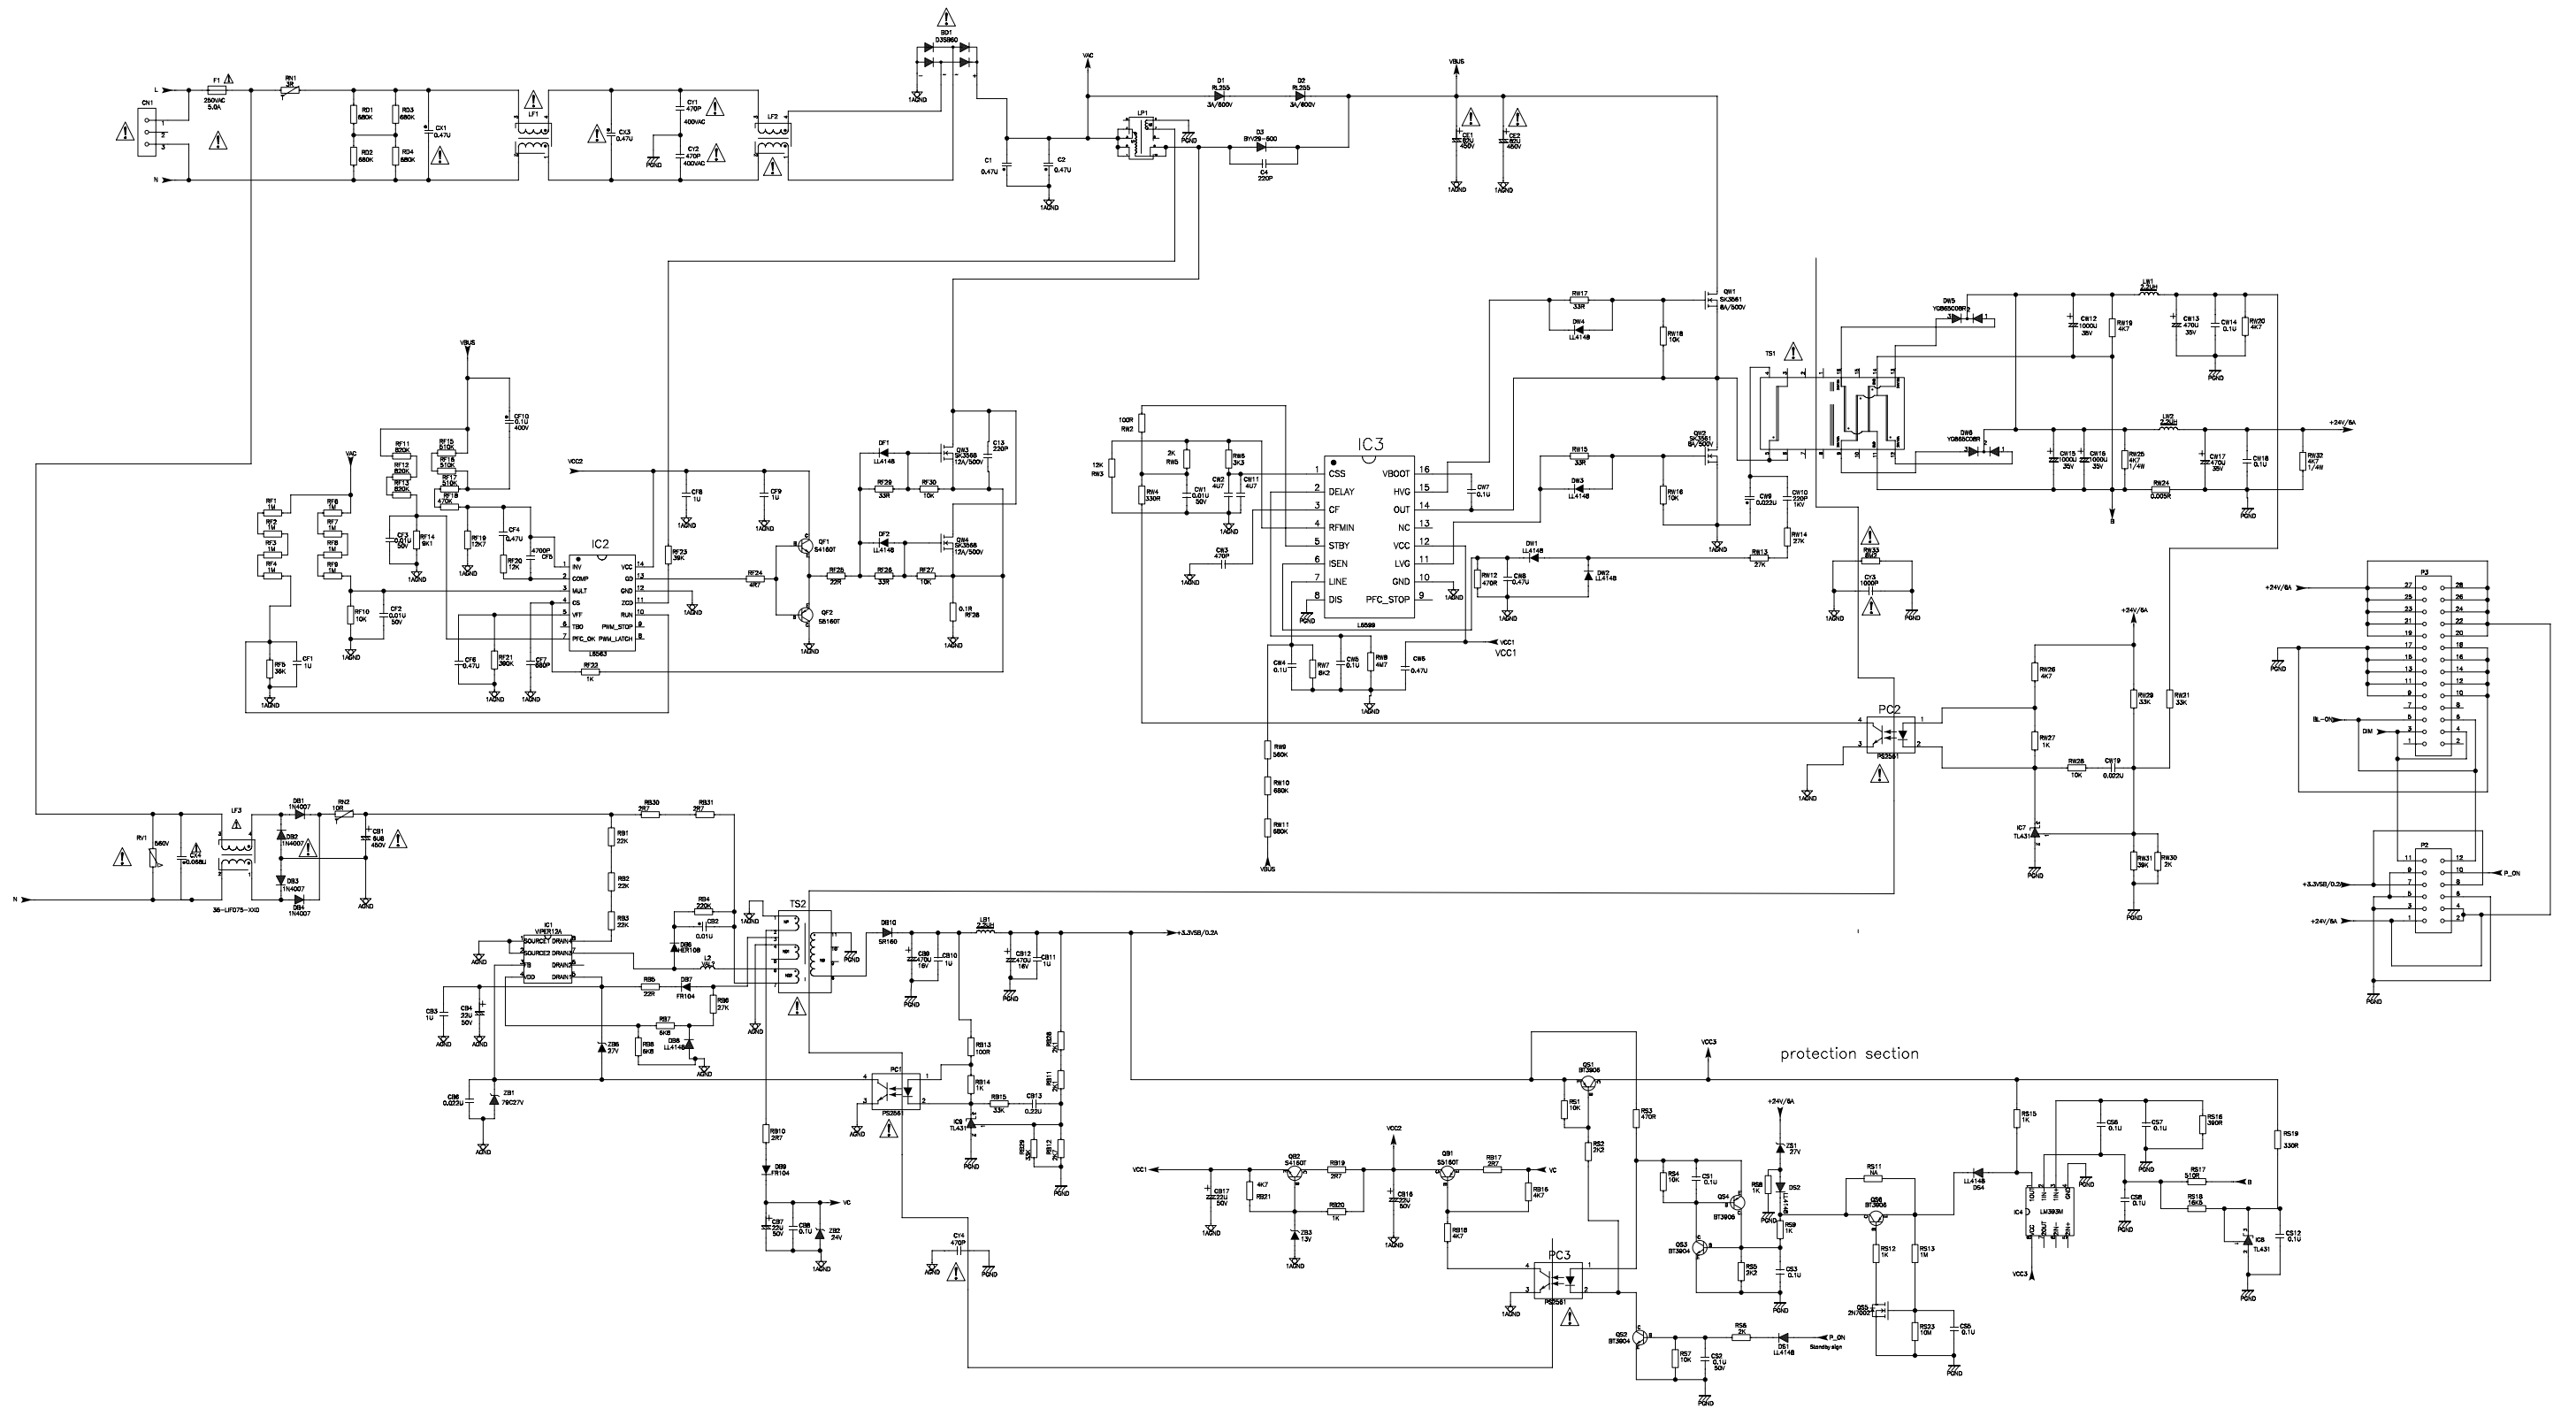

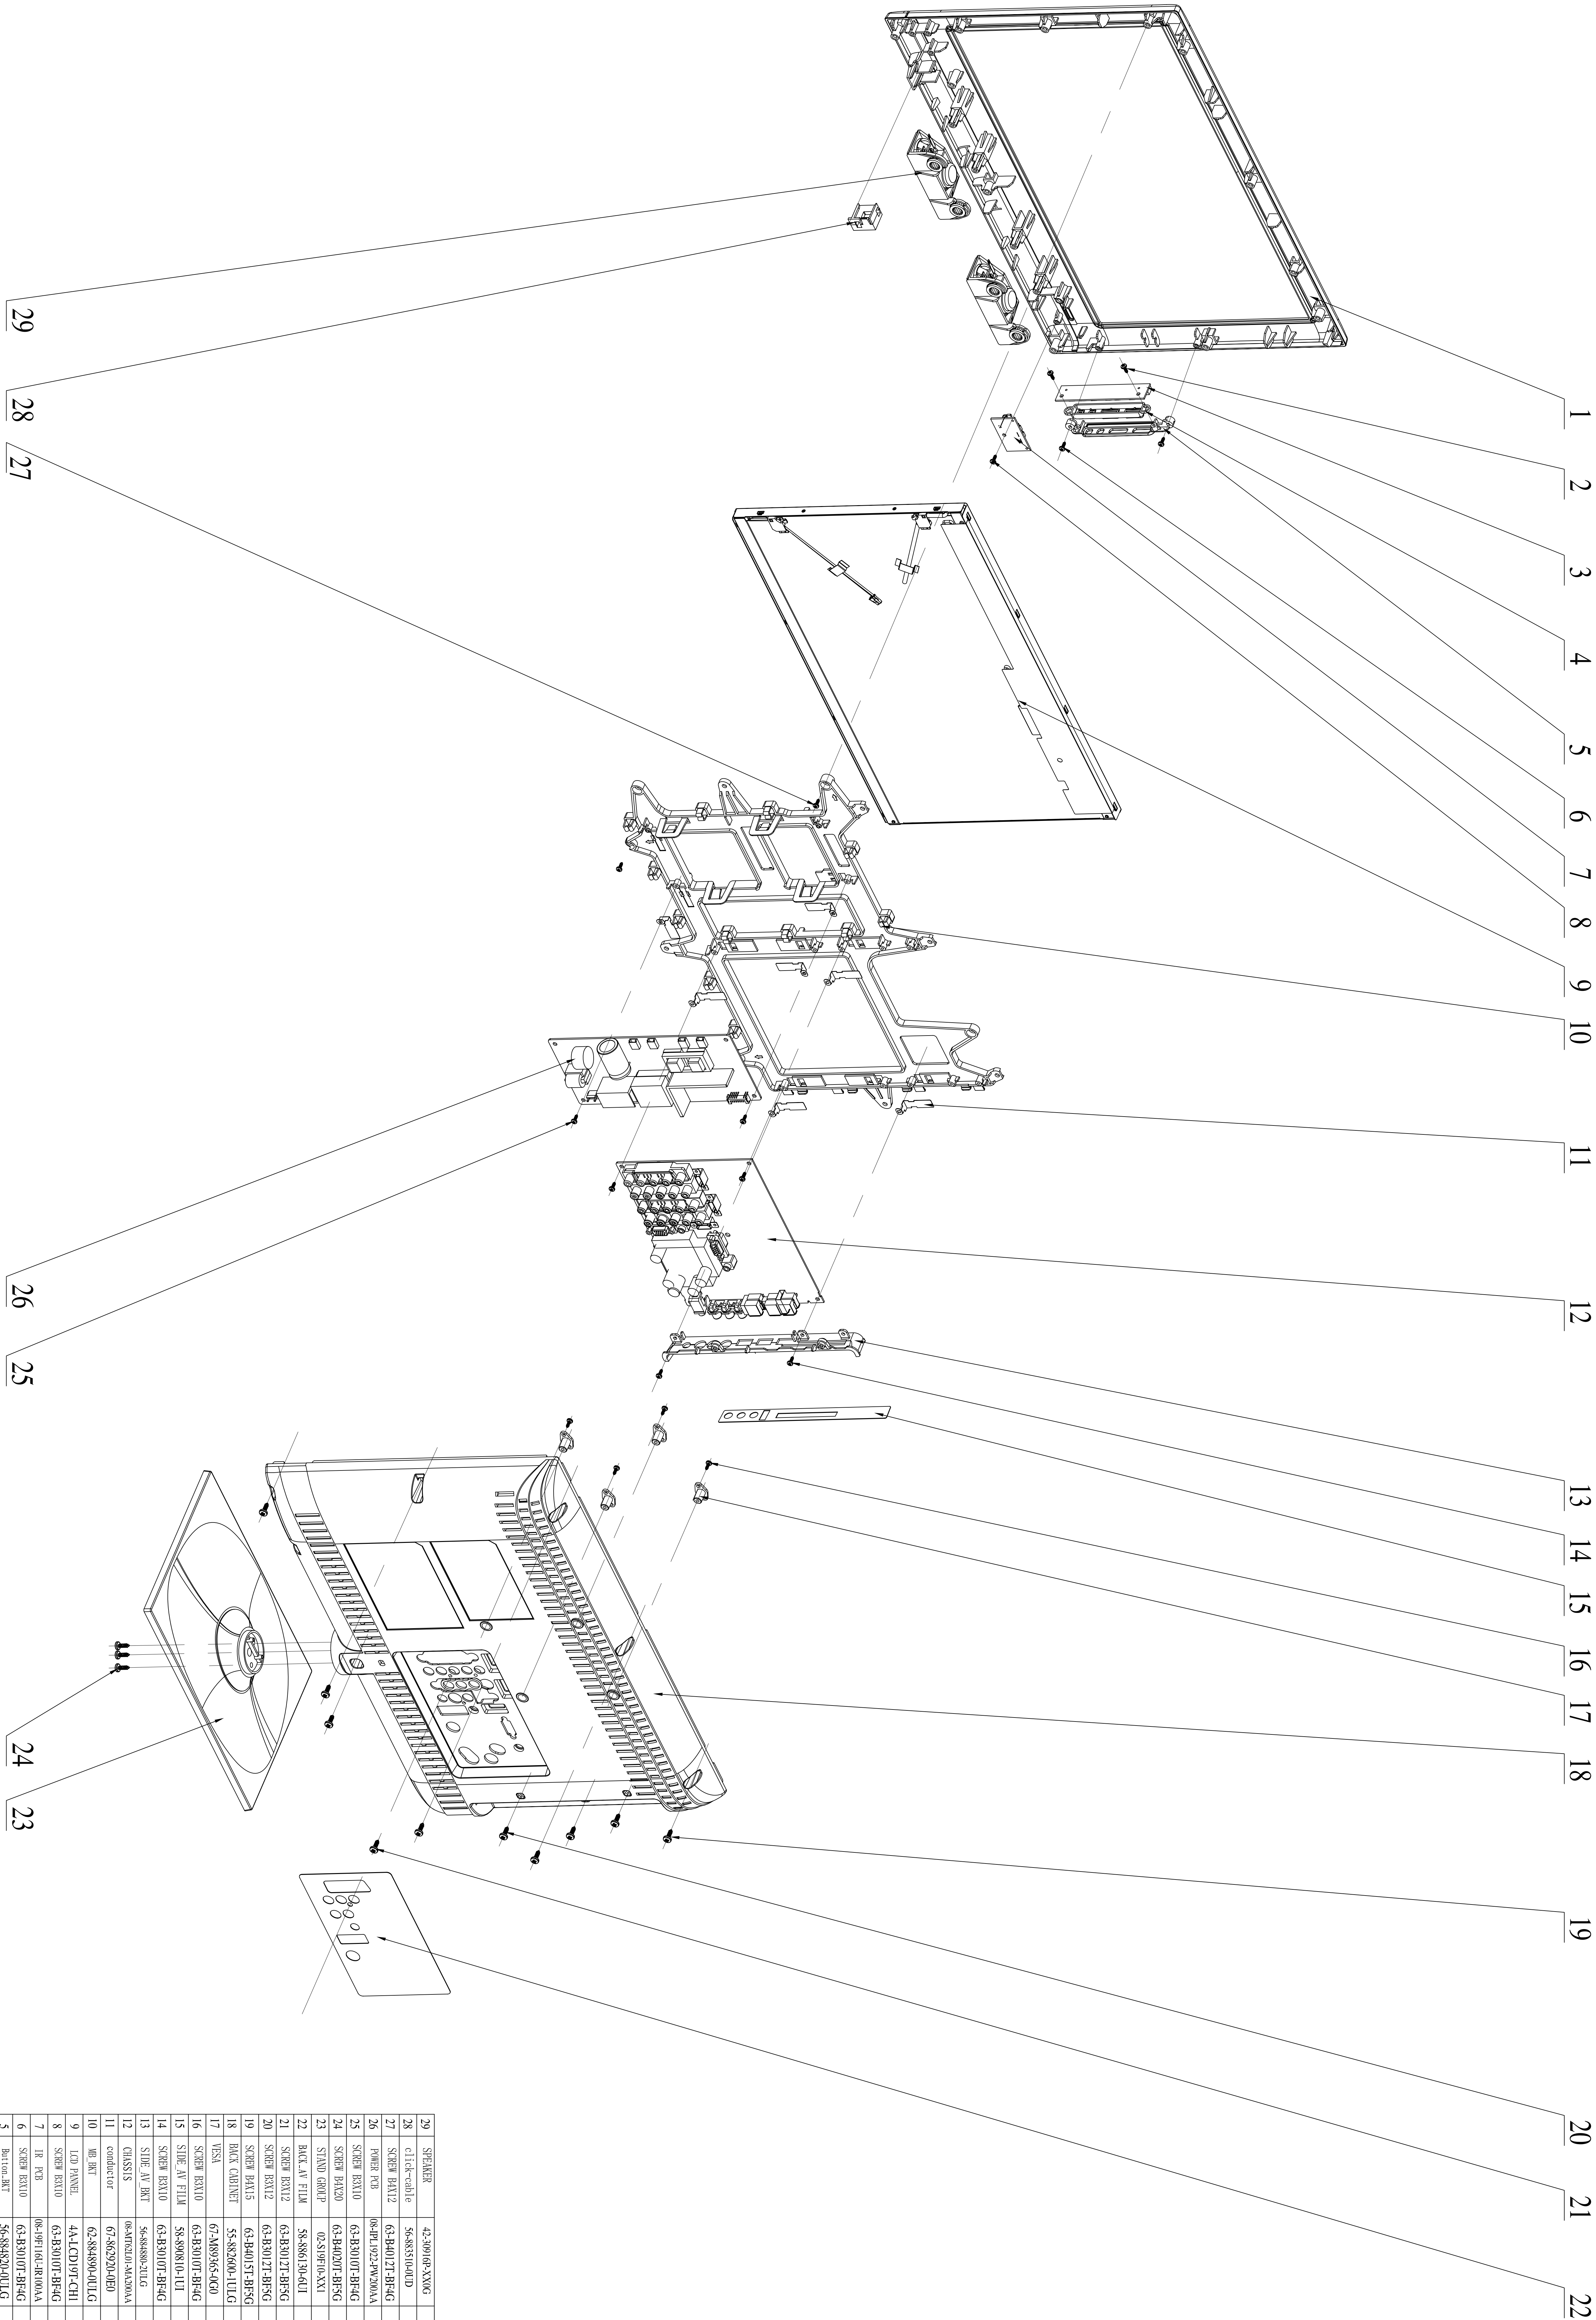


No. 序号	Description 描述	Code No. 物料编号	Material 材料	Qty's 数量	Remark 备注
29	SPEAKER	42-3090P-XXHG	PP	2	
28	CD-ROM	56-85310-04UD		1	
27	SCREEN BAY12	63-B4012T-BH4G		3	
26	POWER PCB	06-RP1922-PW30AA		1	
25	SCREEN BAY10	63-B3010T-BH4G		2	
24	SCREEN BAY20	63-B4020T-BH5G		3	
23	STAND GROUP	02-S090XX1		1	
22	BACK FILM	58-S86130-001	PVC	1	
21	SCREEN BAY12	63-B3012T-BH5G		1	
20	SCREEN BAY12	63-B3012T-BH5G		2	
19	SCREEN BAY15	63-B4015T-BH5G	HIPS	8	
18	BACK CABINET	55-S8200-1U1LG	HIPS	1	
17	VESA	67-A09365-400	SEC	4	
16	SCREEN BAY10	63-B3010T-BH4G		4	
15	SIDE AV FILM	58-S09810-1U1	PVC	1	
14	SCREEN BAY10	63-B3010T-BH4G	HIPS	4	
13	SIDE AV BKT	56-S88893-1UG	HIPS	1	
12	GLASSIS	06-S09716L-AP10AA		1	
11	conductor	67-S62920-0BD	SECC	6	
10	WEL BKT	62-S84894-0UG	HIPS	1	
9	LCD PANEL	4A-LCD19T-CHI		1	
8	SCREEN BAY10	63-B3010T-BH4G		1	
7	IR FIB	06-S09716L-AP10AA		1	
6	SCREEN BAY10	63-B3010T-BH4G	HIPS	2	
5	button/ACT	56-S84820-0UG	HIPS	1	
4	button	56-S84810-0U1LG	HIPS	1	
3	Bottom RGB	06-S09716L-KH10AA		1	
2	SCREEN BAY0	63-B3006-RT4G		2	
1	FRONT CABINET	55-S82610-0UG	HIPS	1	

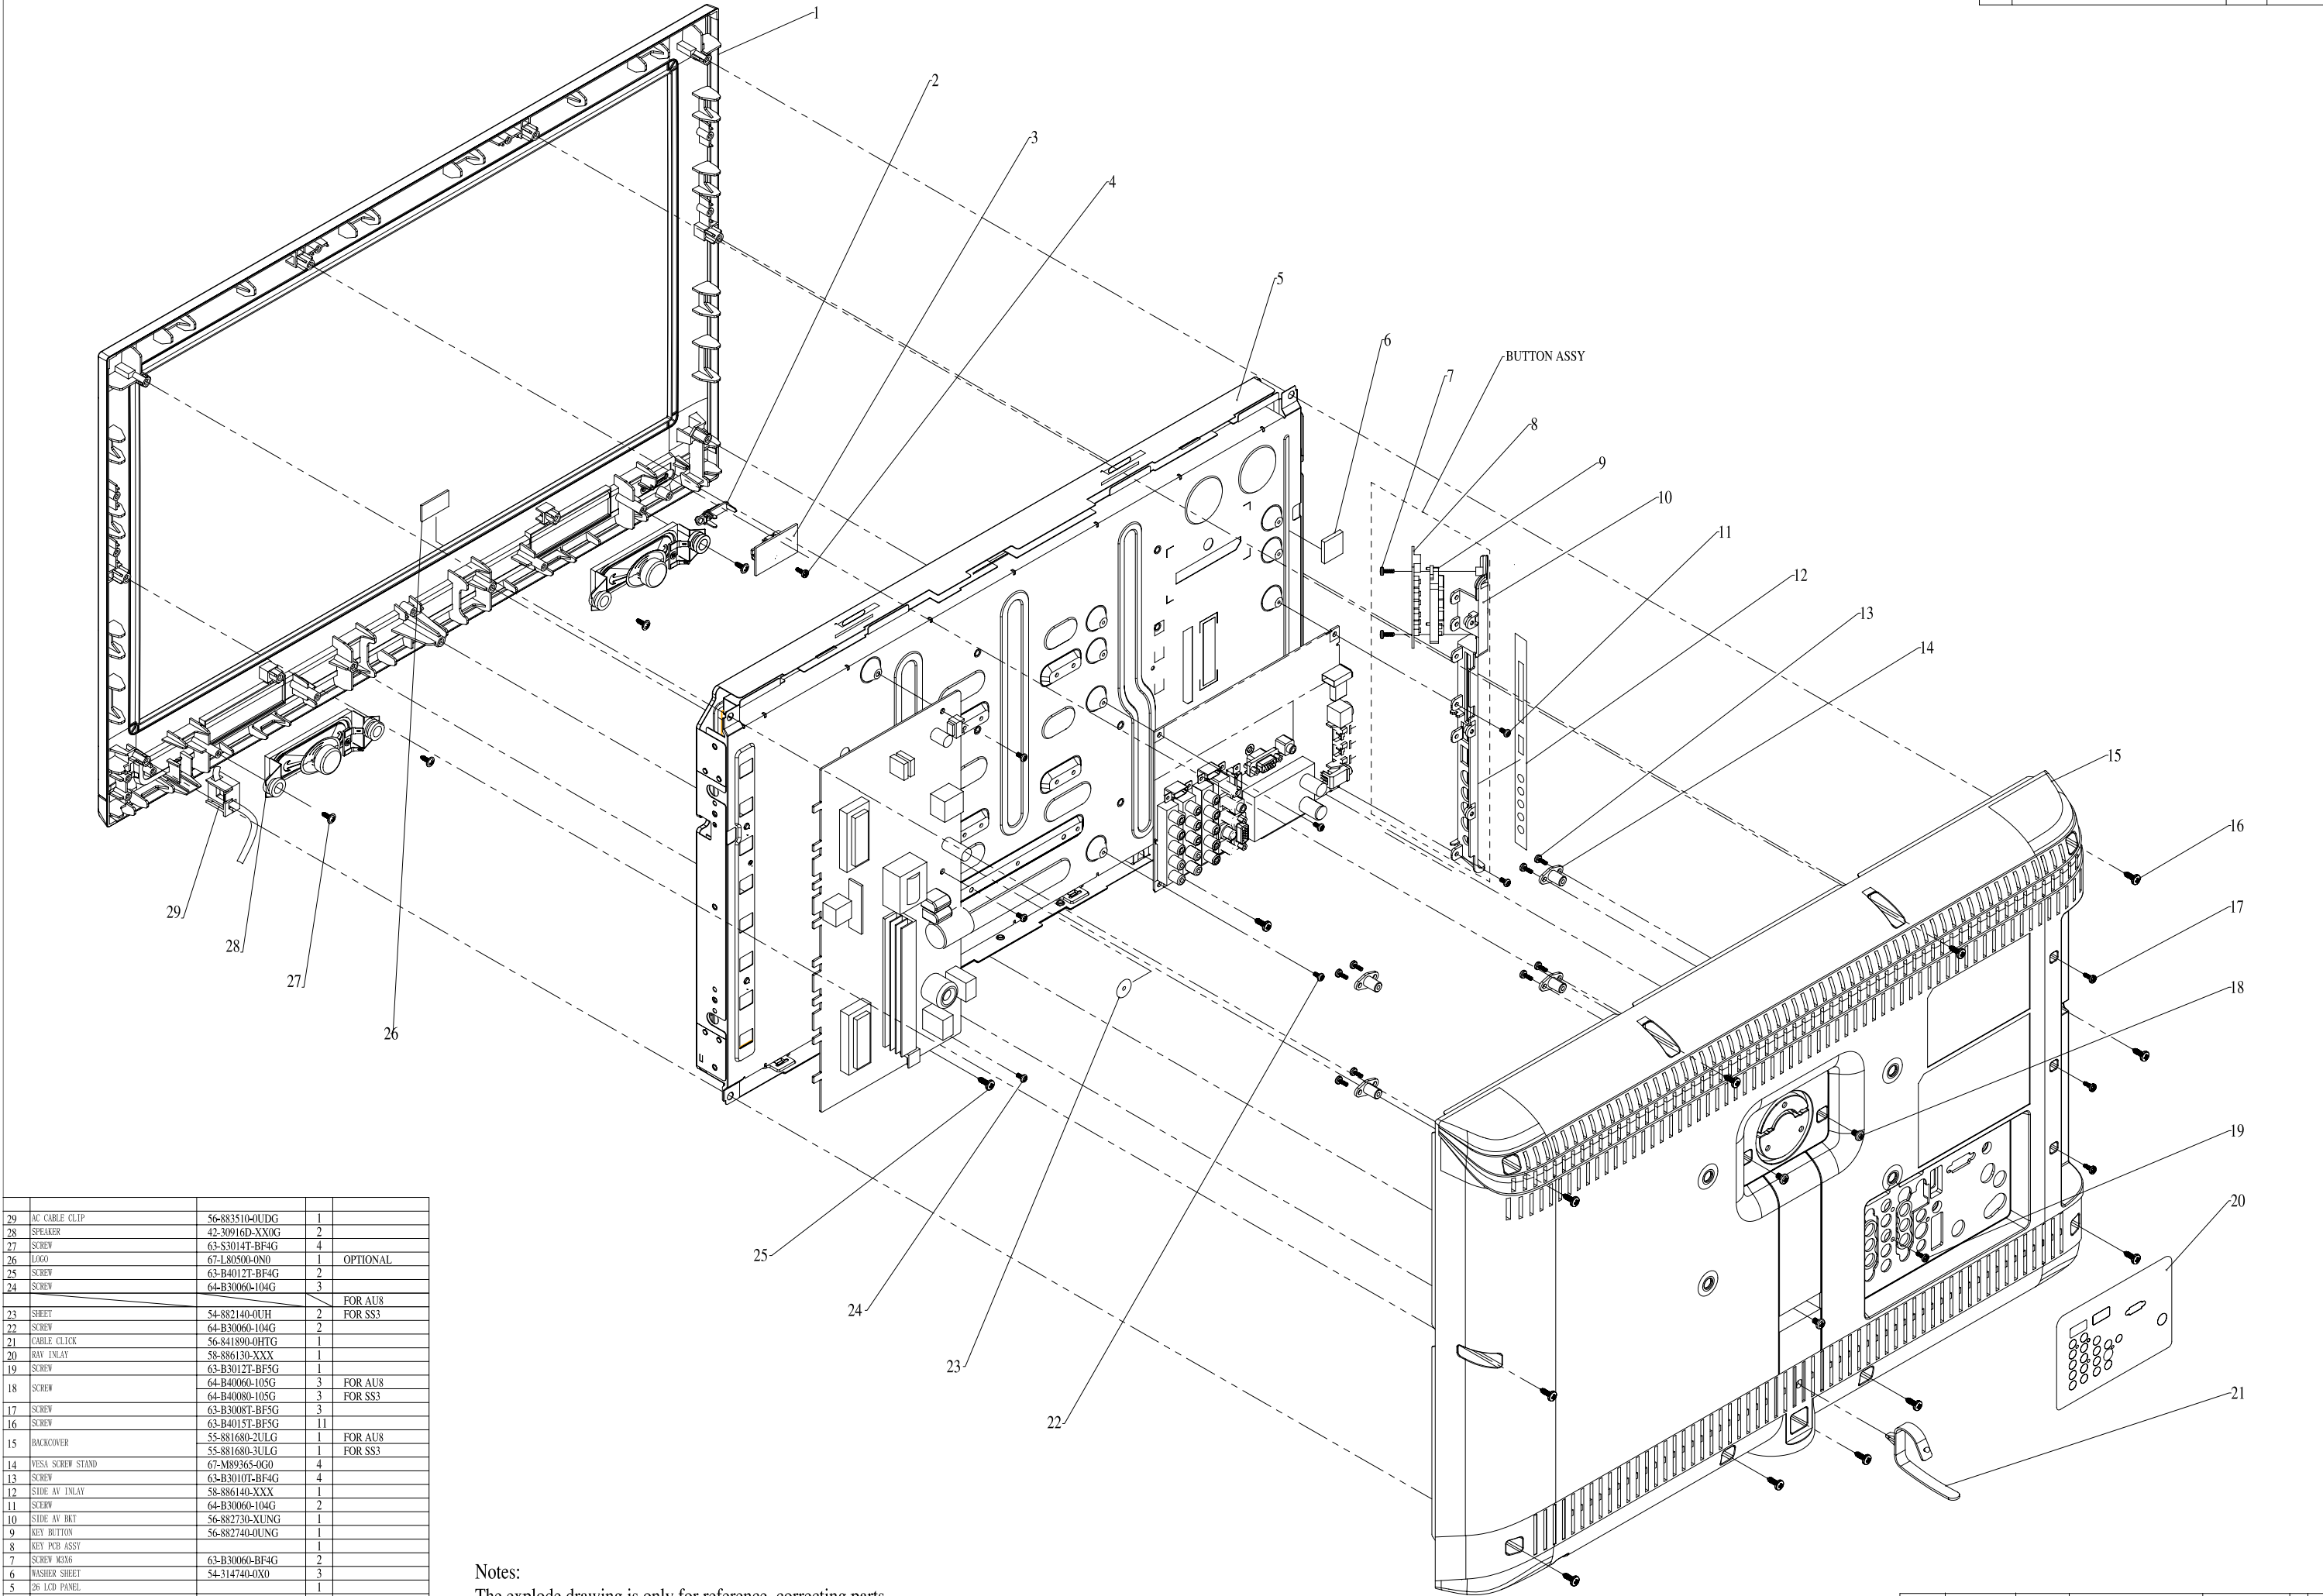

29	AC CABLE CLIP	56-883510-00UDG	1	
28	SPEAKER	42-30916D-XX0G	2	
27	SCREW	63-S3014T-BF4G	4	
26	LOGO	67-L80500-0N0	1	OPTIONAL
25	SCREW	63-B4012T-BF4G	2	
24	SCREW	64-B30060-104G	3	
				FOR AU8
23	SHEET	54-882140-00UH	2	FOR SS3
22	SCREW	64-B30060-104G	2	
21	CABLE CLICK	56-841890-0HTTG	1	
20	RAY INLAY	58-886130-XXX	1	
19	SCREW	63-B3012T-BF5G	1	
18	SCREW	64-B40060-105G	3	FOR AU8
		64-B40080-105G	3	FOR SS3
17	SCREW	63-B3008T-BF5G	3	
16	SCREW	63-B4015T-BF5G	11	
15	BACKCOVER	55-881680-2ULG	1	FOR AU8
		55-881680-3ULG	1	FOR SS3
14	VESA SCREW STAND	67-M89365-0G0	4	
13	SCREW	63-B3010T-BF4G	4	
12	SIDE AV INLAY	58-886140-XXX	1	
11	SCREW	64-B30060-104G	2	
10	SIDE AV BKT	56-882730-XLUNG	1	
9	KEY BUTTON	56-882740-0UNG	1	
8	KEY PCB ASSY		1	
7	SCREW M3X6	63-B30060-BF4G	2	
6	WASHER SHEET	54-314740-0X0	3	
5	26 LCD PANEL		1	
4	SCREW M3X10	63-B3010T-BF4G	1	
3	1R PCB ASSY		1	
2	1R LENS	56-882700-0HH	1	
1	26F10 FRONT CABINET	55-881660-0UL	1	
ITEM	NAME	PART NO.	QTY.	REMARK


Notes:
The explode drawing is only for reference, correcting parts
and screws are according to BOM please.

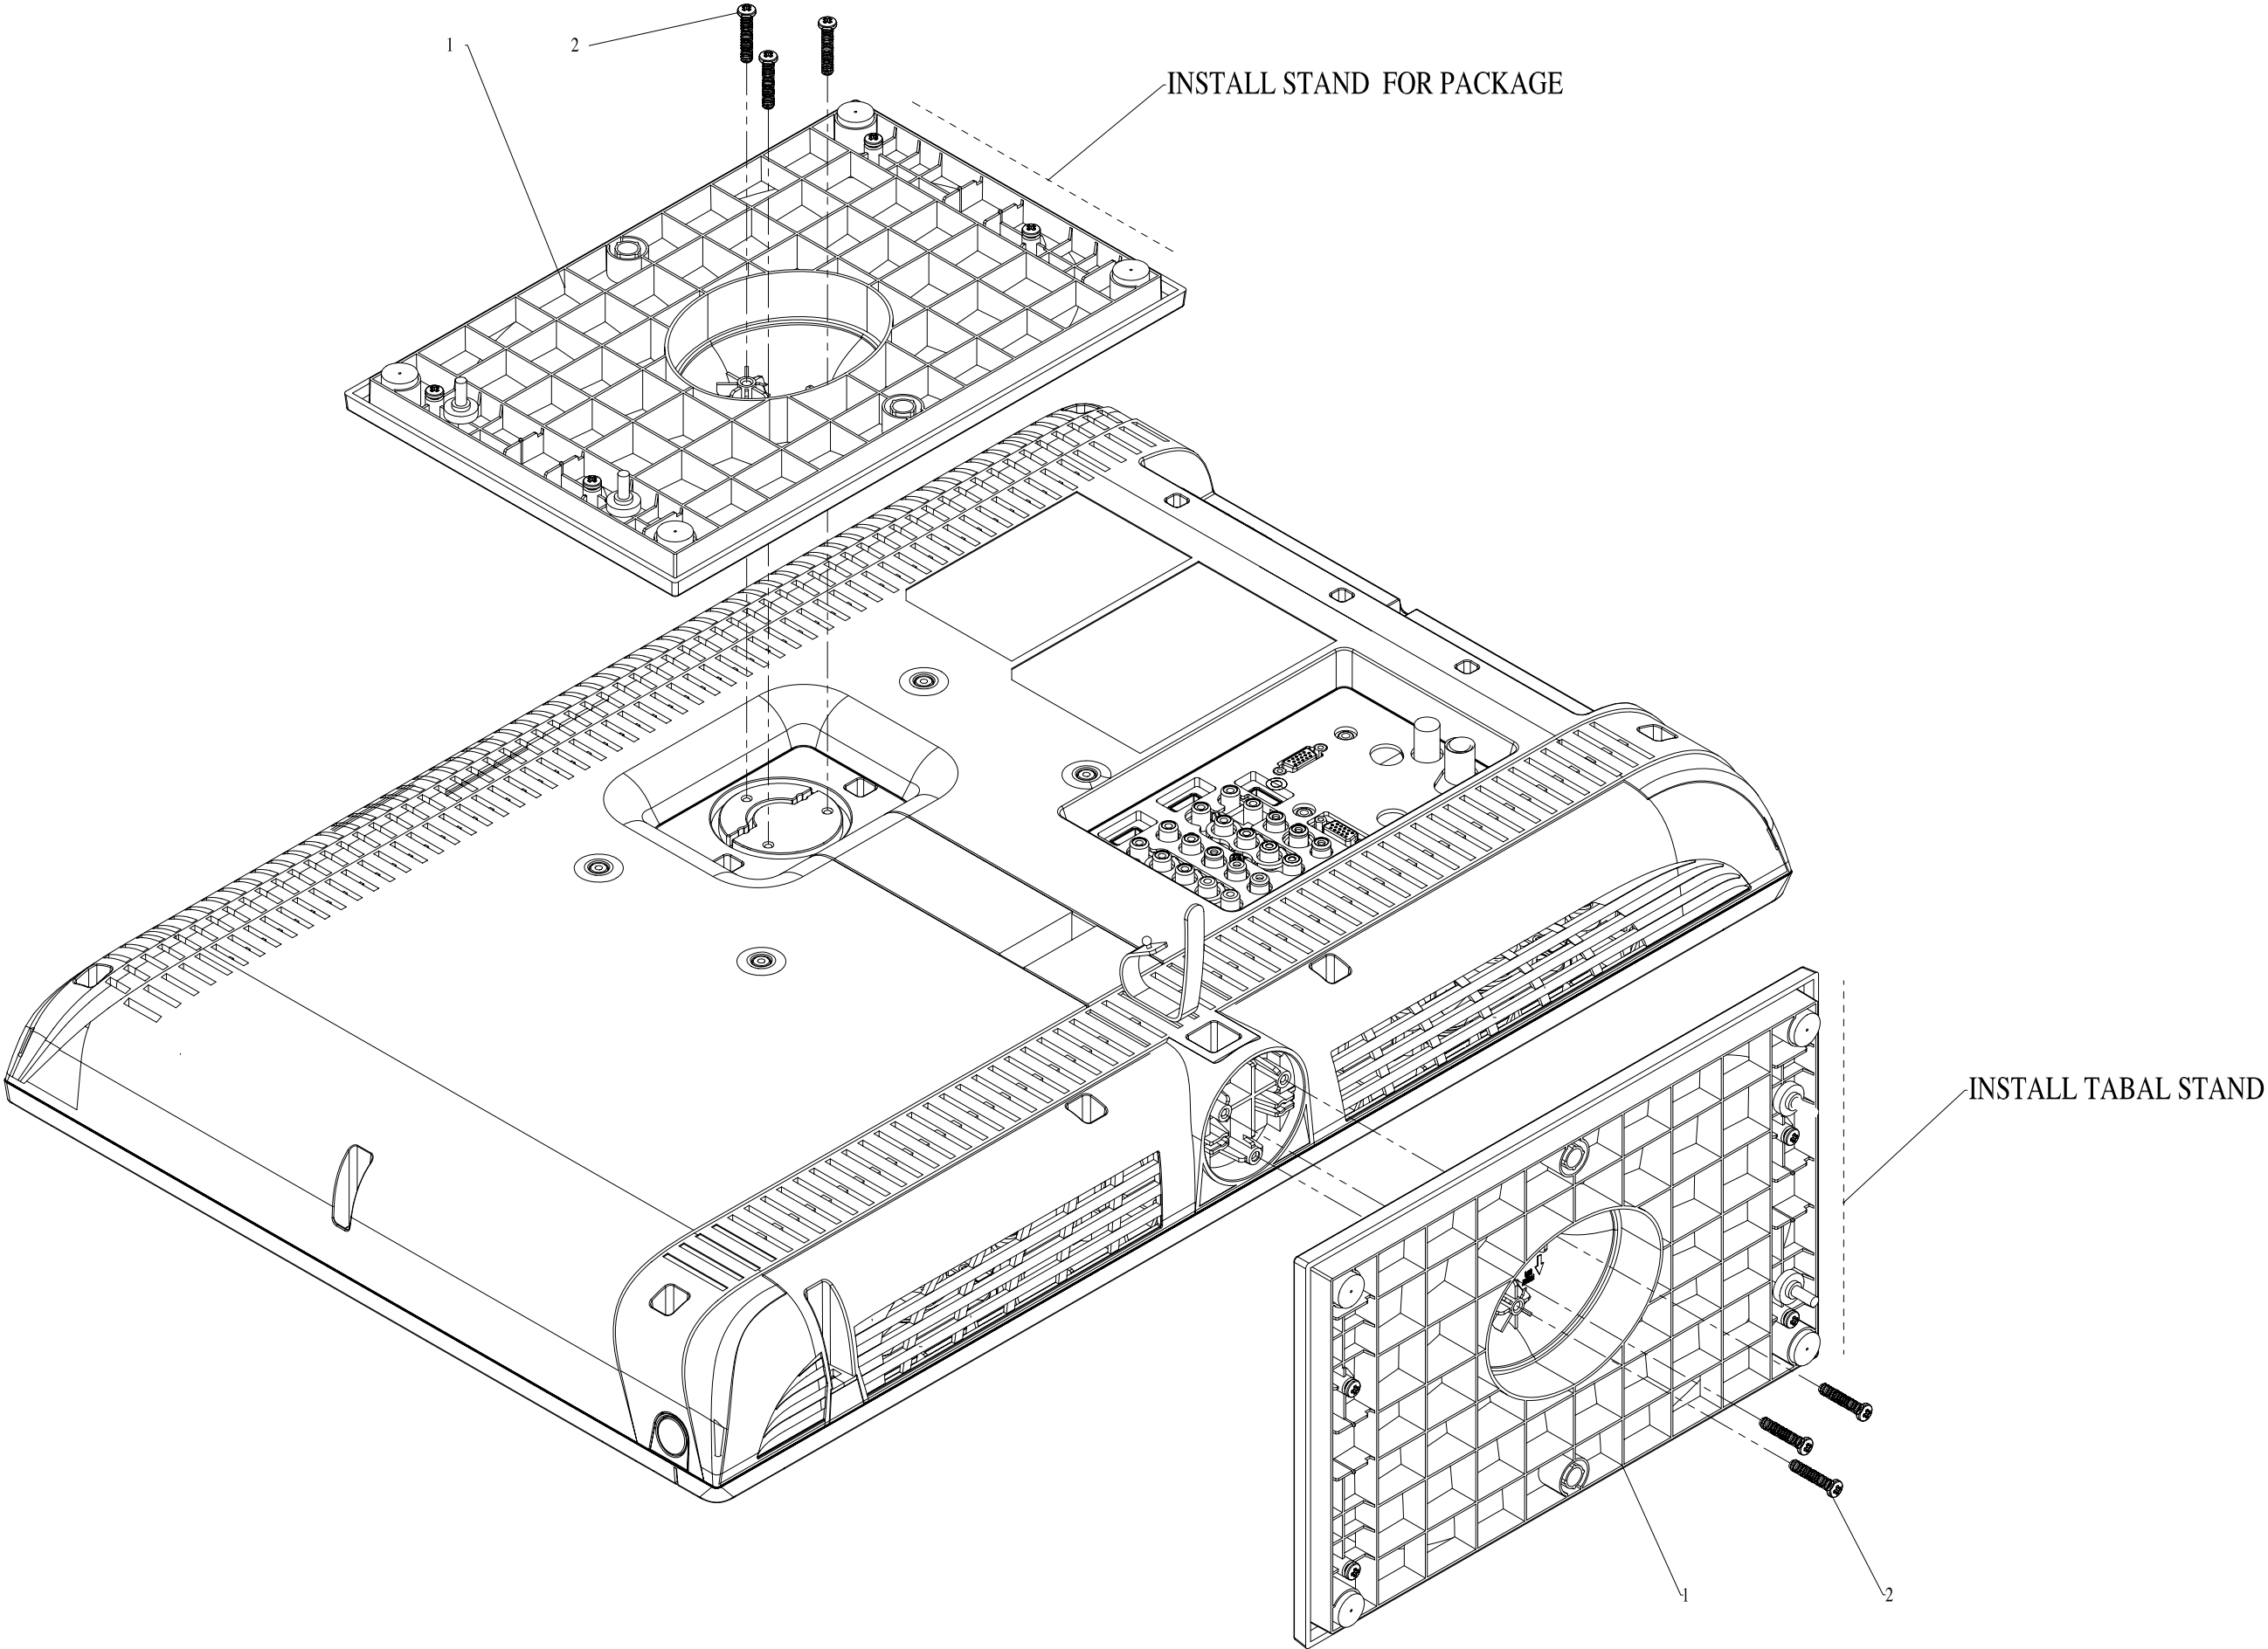

Notes:
The explode drawing is only for reference, correcting parts
and screws are according to BOM please.

2	SCREW	63-B4025T-BF5G	3	
1	26F10/26F11 STAND	02-885510-001	1	REGION: EU
		02-885510-000	1	REGION: NA
ITEM	NAME	PART NO.	QTY.	REMARK

DRAW			MODEL NO.	LCD 26F10/26F11	MEDIA NO.	PAGE 1 OF 2
CHECK						
SIGN						
APPROVE			TTE Mechanical development	EXPLODE DRAWING		

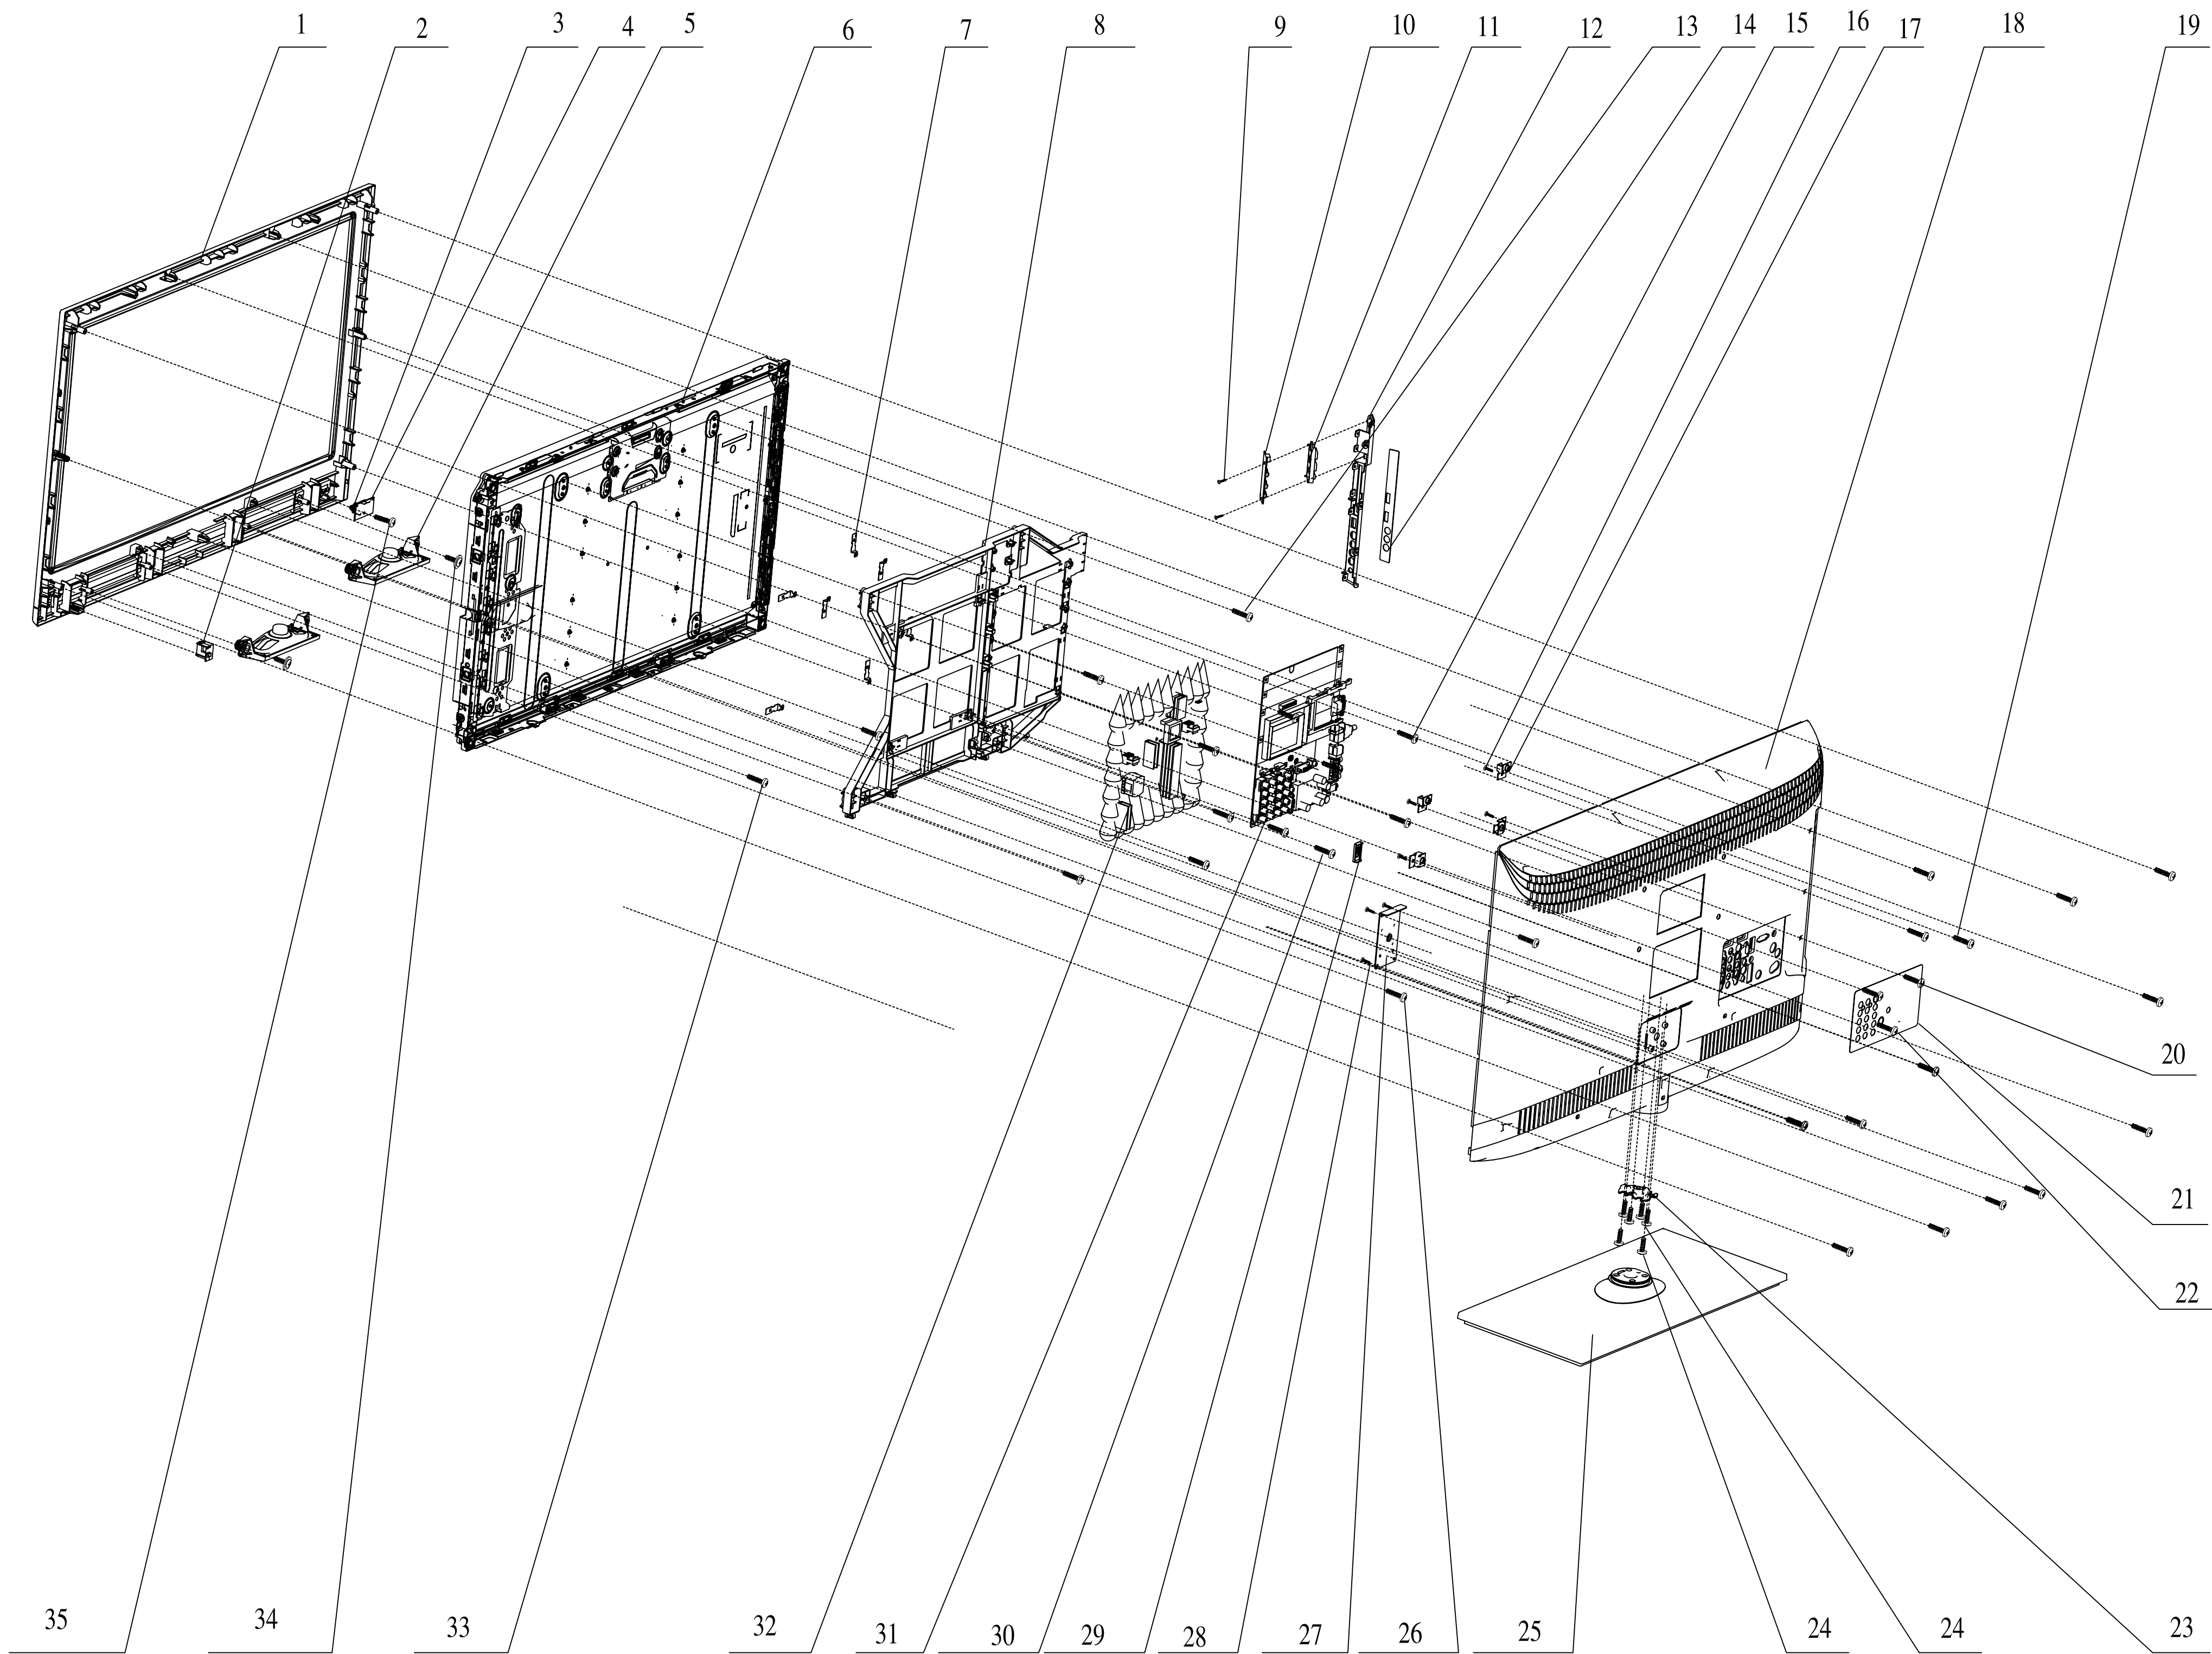

54						
53						
52						
51						
50						
49						
48						
47						
46						
45						
44						
43						
42						
41						
40						
39						
38						
37						
36						
35	SCREW3*10	63-B3010T-BF4G			1	
34	SCREW3*14	63-S3014T-BF4G			2	
33	SCREW4*12	63-B4012T-BF4G			2	
32	power				1	
31	CHASSIS				1	
30	SCREW 3*10	63-B3010T-BF4G			4	
29	HDMI support	62-890600-0ULG	HIPS		1	
28	SCREW 3*10	63-B3010T-BF4G			4	
27	BACK PLATE	67-M88512-0E3	SECC		1	
26	SCREW4*25	63-B4025T-BF5G			2	
25	STAND	02-885590-002			1	
24	SCREW4*12	63-B4012T-BF5G			4	
23	STAND PLATE	67-M88355-0E3			1	
22	SCREW3*12	63-B3012T-BF5G			1	
21	REAR AV OVERLAY	58-886130-6U1	PVC		1	
20	SCREW3*12	63-B3012T-BF5G			3	
19	SCREW4*25	63-B4025T-BF5G			11	
18	BC	55-883570-2ULG	HIPS		1	
17	VESA	67-M88503-0G0	SGCC		4	
16	SCREW4*10	63-B4010T-BF4G			4	
15	SCREW 3*10	63-B3010T-BF4G			4	
14	SIDE AV OVERLAY	58-890810-1U1	PVC		1	
13	SCREW4*16	64-B40160-104G			4	
12	SIDE AV BRACKET	56-882730-2ULG	HIPS		1	
11	BUTTON	56-882740-0ULG	HIPS		1	
10	BUTTON PCB				1	
9	SCREW3*6	63-B30060-BF4G			2	
8	CHASSIS bracket	62-884320-0ULG	HIPS		1	
7	ground sheet	67-P88513-0E0	SECC		7	
6	LCD				1	
5	SPEAKER				2	
4	TR.PCB				1	
3	IR	56-882700-0HHG	PC		1	
2	CABLE-CLICK	56-883510-0HDG	PP		1	
1	PC	55-881260-0ULG	HIPS		1	
No. 序号	Description 名 称	Code No. 物料编号	Material 材 料	Qty's 数量	Remarks 备 注	

[illegible]

Notes:
The explode drawing is only for reference, correcting parts and screws are according to BOM please.